

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM965500P-BP-WWWVV-XX


May 20, 2024

GTM965500P-BP-WWWVV-XX

Information

Model Number	GTM965500P-BP-WWWVV-XX
Description	GTM965500P-BP-WWWVV-XX, ICT / ITE / Medical Power Supply, 60601-1-4th Ed. , Open Frame/Internal, Regulated Switchmode AC-DC Power Supply AC Adaptor, Forced airflow for full rated power (CFM): 10, Input Rating: 100-240V~, 50-60 Hz , Output Rating: 550 Watts, Power rating with convection cooling (W) 300, 12-54V in 0.1V increments, Approvals:

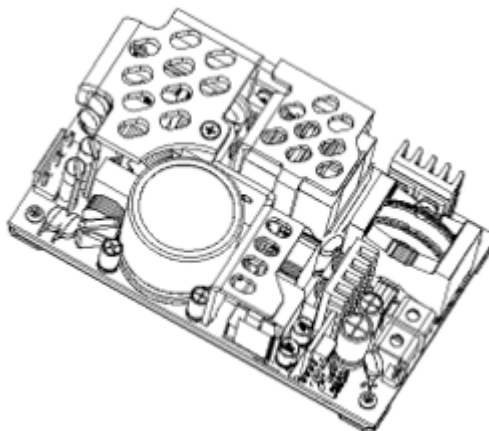Model Picture



Agency Documents

CE EC-Declaration	https://www.globtek.com/pdf/ec_declaration/a0O3a00000MNV3VEAT
RoHS/RoHS2 Declaration	https://www.globtek.com/pdf/rohs_cert/a0O3a00000MNV3VEAT
REACH Declaration	https://www.globtek.com/pdf/iso_certificates/REACH.pdf
Conflict Minerals Declaration	https://www.globtek.com/pdf/conflict-minerals.pdf

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM965500P-BP-WWWVV-XX

May 20, 2024

MODEL PARAMETERS






Type	Open Frame/Internal
Technology	Regulated Switchmode AC-DC Power Supply AC Adaptor
Category	ICT / ITE / Medical Power Supply
Input Voltage	100-240V~, 50-60 Hz
I/P Amps (A)	6A
Wattage (W)	550.0
Vout Range (V)	12-54
Efficiency Level	USA DOE Level VI / Eco-design Directive 2009/125/EC, (EU) 2019/1782
Ingress Protection	N/A
Size (mm)	127.0 (L) x 76.2 (W) x 34.3 (H)


Delivering leading edge, innovative power solutions for more than 30 years....

Model: GTM965500P-BP-WWWVV-XX

May 20, 2024

ENCLOSURE

Open-Frame (No suffix)	Open-Frame with Baseplate (-BP)	Enclosed with Top-Fan (-TF)	Enclosed with End-Fan & TE/AMP Input Connector (-EF)	Enclosed with End-Fan & IEC60320 C14 Inlet (-EFI)
				

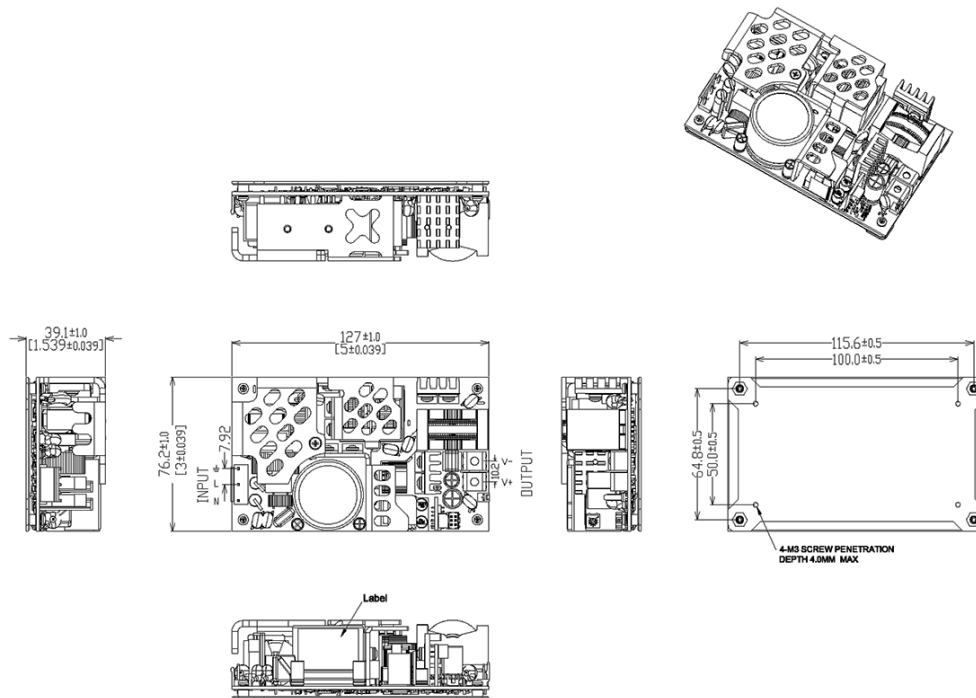

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GTM965500P-BP-WWWV-XX

May 20, 2024

RATING TABLE

Model Number	Voltage	Amps(A)	Watts(W)	RFQ
GTM965500P-BP-55012-F4	12 V			RFQ
GTM965500P-BP-55019-F4	19 V			RFQ
GTM965500P-BP-55024-F4	24 V			RFQ
GTM965500P-BP-55036-F4	36 V			RFQ
GTM965500P-BP-55048-F4	48 V			RFQ
GTM965500P-BP-55054-F4	54 V			RFQ

Model: GTM965500P-BP-WWWVV-XX

May 20, 2024

SPECIFICATIONS

Features

- High power density 3" x 5" format
- Full power rating at 50°C ambient and 90VAC
- Auxiliary +12V fan and +5V standby outputs
- Power-good, remote-off, & remote-sense
- Output voltage fine adjustment
- 20ms min. holdup time for full power range
- Available with earthed output or floating output (with functional earth)
- ITE/ICT and medical (2 x MOPP) certified

Input

Input Voltage:	90 - 264VAC (Nameplate: 100 - 240VAC)
Input Frequency:	47 - 63Hz (Nameplate: 50 - 60Hz)
Input Current:	6.5A max. @ 100VAC, 5.2A typ. @ 115VAC, 2.5A typ. @ 240VAC (full load)
No Load Input Power:	< 500mW, 240VAC
Inrush Current:	< 35A @ 115VAC , < 70A @ 240VAC (cold start @ 25°C)
Efficiency:	92 - 95% typ.
Power Factor:	> 0.95 @ 115Vac, > 0.90 @ 240VAC (full load)

Main Output

Total Output Power	550W (with forced air cooling)
(Main + Standby + Fan Output):	300W (natural convection cooling)
Turn-on Delay:	< 2 seconds @ 115VAC
Output Voltage Regulation:	± 2.5% (set point tolerance + load/line regulation, measured at output connector)
Load Regulation:	± 1.0% (measured at output connector)
Line Regulation:	± 0.5% (measured at output connector)
Ripple:	< 1% pk-pk (using a 47µF low-ESR cap + 0.1µF ceramic capacitor, measured @ 20MHz BW)
Transient Response:	± 5% deviation max. (with 50% load step), recovery to within ±1% within 1ms
Startup Overshoot:	< 5%
Hold-up Time:	20ms min. (100VAC, full load)
Power-Good (PG):	Signal typically goes low ~10ms ahead of AC power failure or entering of protection state 5V logic level, $V_H = 4.90V$ typ. @ $I_{PG} = 100\mu A$
Remote-Off (RO):	Pull 'Remote Off' to COM to disable main output; leave floating or connect to +5V _{SB} otherwise $I_{RO} = 2mA$ typ. during disabled/off state

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM965500P-BP-WWWV-XX

May 20, 2024

Remote-Sense:	Up to 500mV total cable-drop compensation, reverse and short circuit protected
Output Voltage Fine Adjustment:	Via potentiometer, $\pm 5\%$ adjustment range

Standby Output

Output Voltage:	5V
Output Current:	1A
Output Voltage Regulation:	$\pm 5.0\%$ (set point tolerance + load/line/cross regulation)
Ripple:	2% pk-pk (using a 47 μ F low-ESR cap + 0.1 μ F ceramic capacitor, measured @ 20MHz BW)
Hold-Up Time:	20ms min.
Always On?	Yes

Fan Output

Output Voltage:	12V
Output Current:	0.5A
Output Voltage Regulation:	$\pm 15.0\%$ (set point tolerance + load/line/cross regulation)
Ripple:	1% pk-pk (using a 47 μ F low-ESR cap + 0.1 μ F ceramic capacitor, measured @ 20MHz BW)
Always On?	Follows 'Remote-Off' signal (i.e. Fan is off when RO is pulled low.)

Protections

Input Protection:	MOV transient suppressor, dual high breaking capacity fuses
Over-Voltage Protection:	110-150%, latching, cycle AC power to reset
Over-Current Protection:	105-150%, non-latching with auto-recovery
Short Circuit Protection:	Non-latching with auto-recovery
Over-Temperature Protection:	Latching, cycle AC power to reset

Environmental

MTBF:	1,500,000 hours @ 25°C ambient, full load (Telcordia SR-332, Issue 3)
Operating Temperature:	-20°C to 50°C (full output power), -20°C to 70°C (with derating)
Storage Temperature:	-40°C to 85°C
Humidity:	0% to 95% relative humidity, non-condensing
Altitude:	5000m max.
Vibration:	Conforms to EN60068-2-6

Safety

Certifications:	IEC60601-1 IEC62368-1
-----------------	--------------------------

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM965500P-BP-WWWVV-XX

May 20, 2024

	IEC60335-1
Dielectric Withstand Voltage:	4000VAC (primary-to-secondary) 1500VAC (primary-to-earth) 1500VAC (secondary-to-earth) [Functional earth option only]
Output Touch Current:	NC: <100µA SFC: <500µA
Earth Leakage Current:	NC: <200µA SFC: <1.0mA
Means of Protection:	2 x MOPP (primary-to-secondary) 1 x MOPP (primary-to-earth) 1 x MOPP (secondary-to-earth) [Functional earth option only]
EMC	
Certifications:	IEC60601-1-2 EN55032 (CISPR32) EN55035 (CISPR35)
Conducted Emissions:	Class B, FCC Part 15 (with resistive load)
Radiated Emissions:	Class B, FCC Part 15 (with resistive load)
Harmonic Current Voltage Distortion:	EN61000-3-2, Class A
Voltage Fluctuations/Flicker:	EN61000-3-3
Electrostatic Discharge (ESD) Immunity:	EN61000-4-2, 10KV contact discharge, 20KV air discharge (applied to input, output, or control connector)
Radiated RF Immunity:	EN61000-4-3, 10V/m 80-2700MHz, 80% 1KHz AM.
EFT/Burst Immunity:	EN61000-4-4, 4KV/100kHz.
Line Surge Immunity:	EN61000-4-5, 2KV differential-mode, 4KV common-mode
Conducted RF Immunity:	EN61000-4-6, 3VRMS, 80% 1KHz AM
Power Frequency Magnetic Field Immunity:	EN61000-4-8, 30A/m
Voltage Dip Immunity:	EN61000-4-11
Mechanical	
Dimensions (nom.)	127.0 x 76.2 x 33.4mm (5.00" x 3.00" x 1.31")
Open-Frame (GTM965500P):	[Height measurement is PCB thickness + tallest component]
Dimensions (nom.)	
Open-Frame with baseplate (GTM965500P-BP):	127.0 x 76.2 x 39.1mm (5.00" x 3.00" x 1.54")
Dimensions (nom.)	
Enclosed with top fan (GTM965500P-TF):	138.0 x 88.0 x 57.4mm (5.43" x 3.47" x 2.26")
Dimensions (nom.)	
Enclosed with end fan (GTM965500P-EF/-EFI):	161.0 x 88.0 x 43.0mm (6.34" x 3.47" x 1.69")
Fan Audible Noise:	
Enclosed with top fan (GTM965500P-TF):	28.5dBA typ.
Fan Audible Noise:	
Enclosed with end fan	27.5dBA typ.

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<https://www.globtek.com/ds/bmLBSBHeGs6/FB62PbesLdi.html>

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM965500P-BP-WWWV-XX

May 20, 2024

(GTM965500P-EF/-EFI):

Mounting to end-application enclosure: Refer to the mechanical drawing for the maximum/recommended penetration depths of mounting screws used to secure the power supply to the end-application enclosure. Failure to adhere to the specified depths may pose a safety risk.

Input/Output Connectors



Input Connector for Open-Frame, -BP, and -TF (J1):	Connector on PCB: JST B3P5-VH Recommended mate: JST VHR-5N Pinout: 1: Neutral 2: Line 3: Earth
Input Connector for -EF:	Connector on enclosure: TE/AMP 350767-1 Recommended mate: TE/AMP 350766-1 Pinout: 1: Line 2: Neutral 3: Earth
Input Connector for -EFI:	Connector on enclosure: IEC60320 C14 inlet Recommended mate: IEC60320 C13 power cord
Main Output Connectors for -M4 Suffix (J2A, J2B):	Connector on PCB: M4 PCB terminal Recommended mate: M4 or #8 ring terminal (brass or copper) Recommended mounting torque: 1.2Nm Pinout: J2A: V+ J2B: V-
Main Output Connector for -CN Suffix [≤24A only] (J2):	Connector on PCB: Molex 0039288080 Recommended mate: Molex 0039012085 Pinout: 1, 2, 5, 6: V+ 3, 4, 7, 8: V-
Standby Output + Signal Connector (J3):	Connector on PCB: Amphenol 98414-G06-06LF Recommended mate: Amphenol 10073599-006LF Pinout: A01: Remote Off A02: SNS+ A03: SNS- B01: Power Good B02: COM B03: +5V _{SB}
Fan Output Connector (J4):	Connector on PCB: Molex 22-04-1021 Recommended mate: Molex 22-01-1022 Pinout: 1: +FAN 2: -FAN
Negative/common connection:	V- (J2) and COM (J3) are separated by 2.2Ω to prevent main output current from returning through J3. V- and COM may be connected together at the end-system PCB. Connect four M3 mounting holes to earth. (Mounting to a metal plate is recommended) Connect pin 3 of J1 to earth.
Earth connection:	Care must be taken to ensure adequate creepage/clearance to earth. Check relevant safety standards for specific requirements. Note: Heatsinks are live and not connected to earth. When the end-system enclosure is non-conductive, using the baseplate (-BP) or enclosed versions (-TF, -EF) is recommended as a convenient way to connect all four holes to earth.

Delivering leading edge, innovative power solutions for more than 30 years....

Model: GTM965500P-BP-WWWV-XX

May 20, 2024

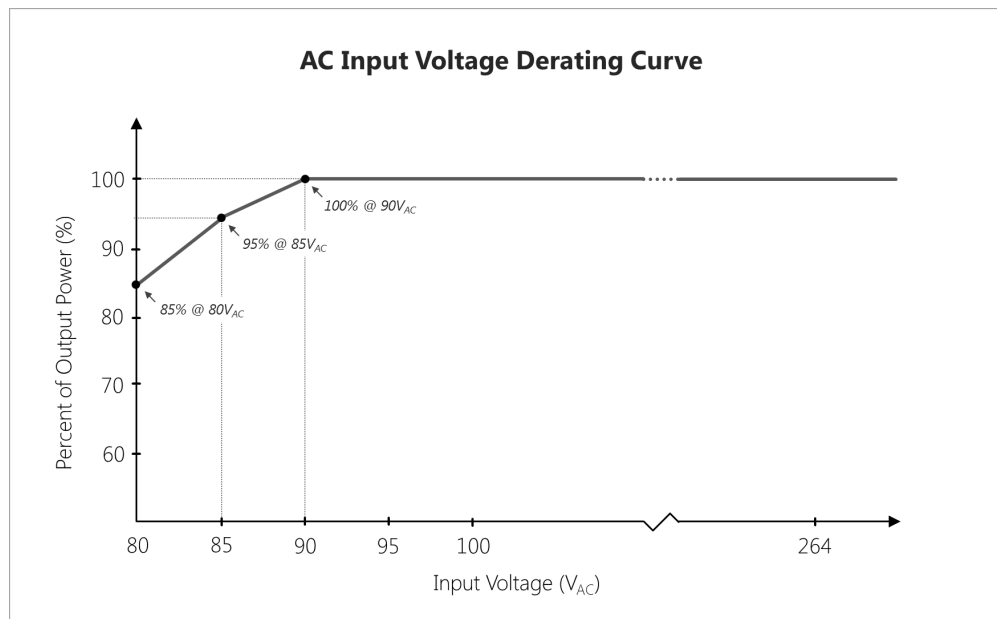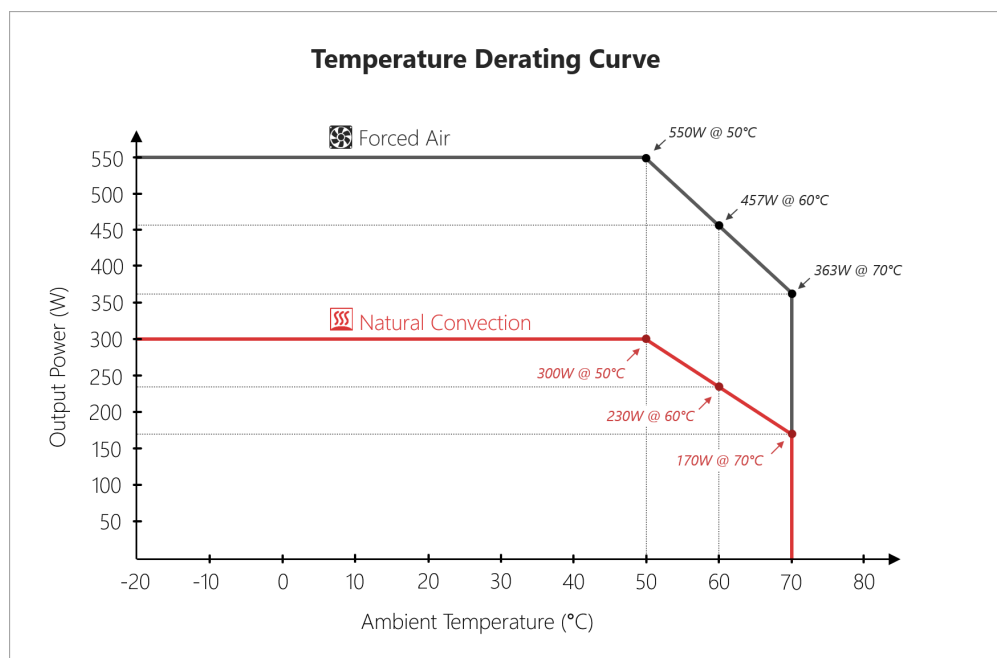DERATING CURVE



Delivering leading edge, innovative power solutions for more than **30** years....

Model:GTM965500P-BP-WWWVV-XX

May 20, 2024

INPUT CONFIGURATION

Description



Delivering leading edge, innovative power solutions for more than **30** years....

Model:GTM965500P-BP-WWWVV-XX

May 20, 2024

Approvals

Logo	
------	--