

Model:GT-41060-WWVV-Q

April 27, 2024

GT-41060-WWVV-Q

Information

Model Number	GT-41060-WWVV-Q
Description	GT-41060-WWVV-Q, ICT/ITE Power Supply, 60601-1-4th Ed. , Wall Plug-in, Regulated Switchmode AC-DC Power Supply AC Adaptor , , Input Rating: 100-240V~, 50-60 Hz, Blade Options for Q Series Wall Plug-in Power Supplies, Output Rating: 15 Watts, Power rating with convection cooling (W) , 3.0-30V in 0.1V increments, Approvals: RCM; EAC; UKCA; CE; WEEE; Double Insulation; VCCI; RoHS; FCC; NrCAN; CB 62368 (pending); CCC; China RoHS; IRAM; PSE; UL/cUL; LPS (9V-30V); Level IV 115V; Ukraine; Korea (12V Only); Belarus (12V only); CB 60950; IP52; IP40; PSE; India BIS (12V only);
Model Picture	
Agency Documents	http://www.globtek.info/certs/GT-41060/
CE EC-Declaration	https://www.globtek.com/pdf/ec_declaration/a0O30000007P7YVEA0
RoHS/RoHS2 Declaration	https://www.globtek.com/pdf/rohs_cert/a0O30000007P7YVEA0
REACH Declaration	https://www.globtek.com/pdf/iso_certificates/REACH.pdf
Conflict Minerals Declaration	https://www.globtek.com/pdf/conflict-minerals.pdf

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-41060-WWVV-Q

April 27, 2024

MODEL PARAMETERS


Type	Wall Plug-in
Technology	Regulated Switchmode AC-DC Power Supply AC Adaptor
Category	ICT/ITE Power Supply
Input Voltage	100-240V~, 50-60 Hz
I/P Amps (A)	0.6 A
Wattage (W)	15.0
Vout Range (V)	3.0-30
Efficiency Level	IV
Ingress Protection	IP40
Size (mm)	84.0* 56.0*37.9

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-41060-WWVV-Q

April 27, 2024

ENCLOSURE

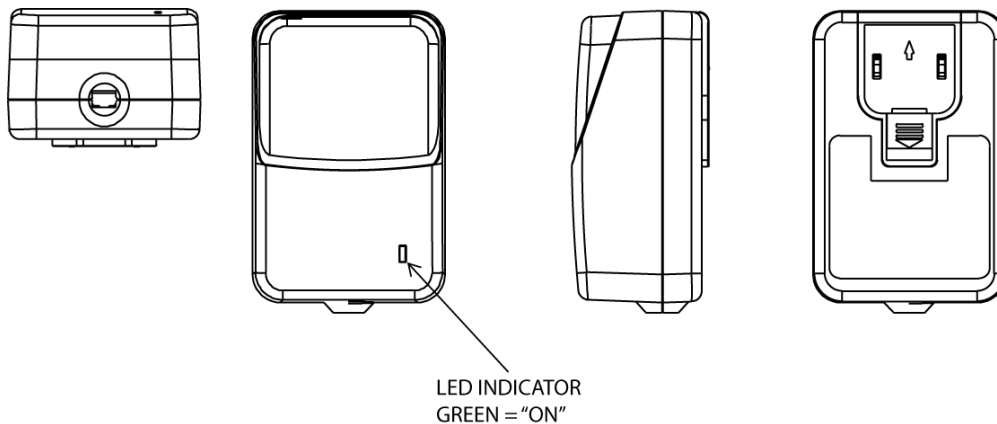

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-41060-WWVV-Q

April 27, 2024

RATING TABLE

Model Number	Voltage	Amps(A)	Watts(W)	RFQ
GT-41060-1003	3 V	3.3	9.90	RFQ
GT-41060-1505-1.7	3.3 V	4.54	14.98	RFQ
GT-41060-1505-1.0	4 V	3.75	15.00	RFQ
GT-41060-1505	5 V	3	15.00	RFQ
GT-91125-15005	5 V	30	150.00	RFQ
HES61-30	5 V	3	15.00	RFQ
GT-41060-1706	6 V	2.8	16.80	RFQ
GT-41060-1809-1.5	7.5 V	2.4	18.00	RFQ
GT-41060-1809	9 V	2	18.00	RFQ
GT-41060-2512	12 V	2.08	24.96	RFQ
GT-51084-12N12-JP	12 V	3	36.00	RFQ
GT-41060-2515	15 V	1.66	24.90	RFQ
GT-41060-2518	18 V	1.38	24.84	RFQ
GT-41060-2520	20 V	1.25	25.00	RFQ
GT-41060-2524	24 V	1.04	24.96	RFQ
DA-60-24	24 V	2.5	60.00	RFQ
GTMDT66A-25.2-2500-3	25.2 V	2.5	63.00	RFQ
GT-41060-2530	30 V	0.83	24.90	RFQ
GT-41060-2548	48 V	0.52	24.96	RFQ

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<https://www.globtek.com/ds/JFkPdbZ2bCc/XvB9ax5PjtD.html>

Model:GT-41060-WWVV-Q

April 27, 2024

SPECIFICATIONS

A) ELECTRICAL SPECIFICATIONS:

1. Input Voltage: Specified 90-264 Vac, Nameplate rated: 100-240Vac
2. Input Frequency: Specified 47-63 Hz, Nameplate rated 50-60Hz
3. Output Regulation: +/- 5% measured at the output connector
4. Line Voltage Regulation: +/- 1% maximum at full load
5. Output Ripple (Vp-p): 1% or 150 mV whichever is greater measured at 20 MHz bandwidth with 0.1 uf ceramic capacitor in parallel with 10 uf electrolytic capacitor connected at the end of output connector at nominal line
6. Turn-On/Turn-Off Overshoot: 5% maximum, 500uS maximum recovery time for 25% to 50% step load
7. Turn-On Delay: 3000 mSEC maximum at full load, 115VAC
8. Hold-Up Time: 10mS minimum at nominal input and full load
9. Inrush Current: 30A typical at 115VAC input and 60A typical at 230 VAC input
10. Switching Frequency: 65 KHz typical

B) PROTECTION

1. Over-Voltage: Protected, unit will recover upon removal of fault
2. Over-Load: Protected, unit will recover upon removal of fault
2. Short Circuit: Protected, unit will recover upon removal of fault
3. Input Protection: Input line fusing

C) SAFETY

1. Dielectric Withstand Voltage: 4242Vdc from primary to secondary
2. Touch Current: <0.25mA @ 240Vac input voltage

D) OTHER:

1. MTBF: 200,000 hours @ 25°C ambient temperature
2. Operating Temperature: 0°C to 40°C ambient temperature
3. Humidity: 0% to 90% relative humidity
4. Storage Temperature: -40°C to 80°C
5. ROHS 2: Complies with EU 2011/65/EU & CHINA SJ/T 11363-2006

E) ENCLOSURE


1. Upper Housing: High impact plastic, 94V0 polycarbonate, non-vented
2. Lower Housing: High impact plastic, 94V0 polycarbonate, non-vented
3. Size: 84.0* 56.0*37.9 mm +/-1.0
4. Green LED indicator for power "Power On"

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-41060-WWVV-Q

April 27, 2024

DERATING CURVE

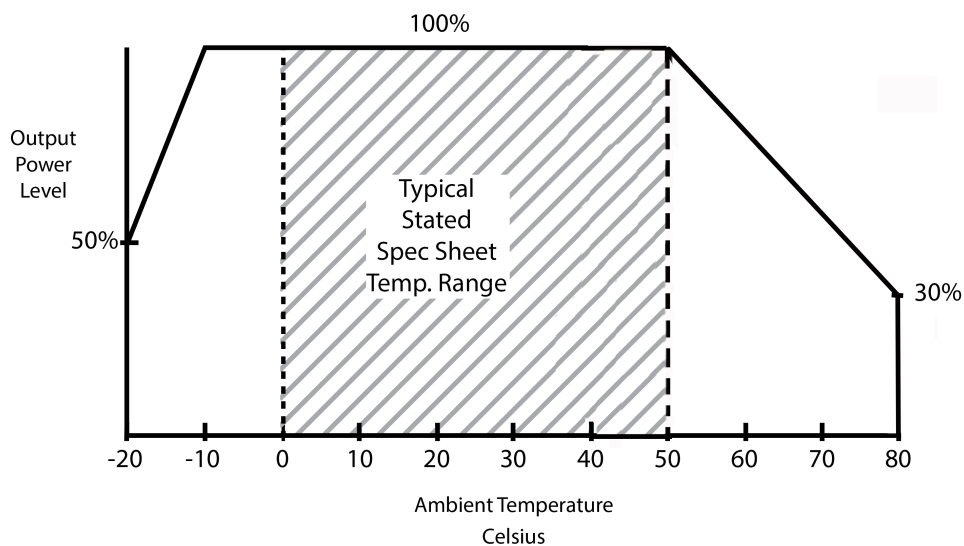

Model:GT-41060-WWVV-Q


April 27, 2024

INPUT CONFIGURATION

Description Blade Options for Q Series Wall Plug-in Power Supplies

Data Sheet: <http://en.globtek.com/interchangeable-blades.php>

Insertion Instructions: <http://www.globtek.com/pdf/Instructions-Interchangeable-Blades.pdf>

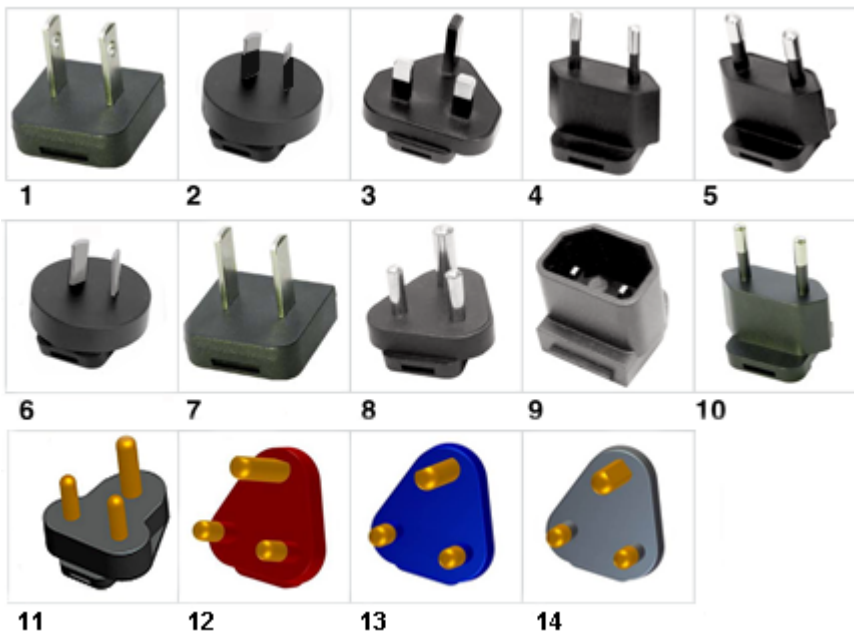Video: [Q-Blade Style Instruction Video](#)


INPUT CONNECTOR: Q-Socket (below are available blades configurations which are "not included" (unless stated above); can be purchased separately, package with power supply or as a separate "Q-KIT" if specified

01. United States / Canada / Japan NEMA 1-15P/ IEC PLUG Type A [WORKS IN PLUG B] configuration: NA 2 blades, Class II; US/CA/JP P/N: Q-NA(R)
02. Australian AS 3112 configuration: SAA 2 blade/ IEC TYPE I, Class II; AU P/N: Q-SAA(R)
03. UK BS 1363 configuration: UK 3 blade with dummy Ground/ IEC TYPE G, Class II; GB P/N: Q-UK(R)
04. European CEE 7/16 configuration: Europlug 2 pins/ IEC TYPE C [WORKS IN TYPE E&F], Class II; EU P/N: Q-EU(R)
05. Korean KS C8305 configuration: 2 pins/SIMILAR TO IEC TYPE C, Class II; KR P/N: Q-KR(R)
06. Argentina IRAM 2073 configuration: 2 blades/SIMILAR TO IEC TYPE I; AR P/N: Class II Q-AR(R)
07. China GB 2099 configuration: 2 blades/SIMILAR TO TYPE A, Class II; CN P/N: Q-CN(R)
08. India IS 1293 6A/BS546 configuration: 5A, 3 pins with Dummy Ground, Class II/IEC TYPE D; IN P/N: Q-IN(R)
09. IEC60320/C18 Inlet, Class II; P/N: Q-C18(R)
10. Brazilian NBR6147 configuration: 2 pins, Class II;SIMILAR TO IEC TYPE C BR P/N: Q-BR(R)
11. South Africa SABS164-1 and India IS 1293, IS694, 16A type plug, 3 round prongs, Class II + dummy ground, IEC TYPE M P/N: Q-SANS164-1-16A(R)
12. South Africa SABS164-4, 3 round prongs with a notched prong @ 0°, Class II + dummy ground, IEC TYPE M Red, P/N: Q-SANS164-4C-16A(R)

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<https://www.globtek.com/ds/JFkPdbZ2bCc/XvB9ax5PjtD.html>

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-41060-WWVV-Q

April 27, 2024

13. South Africa SABS164-4, 3 round prongs with a notched prong @ -53°, Class II + dummy ground, Blue, IEC TYPE M,
P/N:

Q-SANS164-4L-16A(R)

14. South Africa SABS164-4, 3 round prongs with a notched prong @ +53°, Class II + dummy ground, Black, IEC TYPE M
P/N:

Q-SANS164-4R-16A(R)

Kits

01. Q-KIT: 1,2,3,4 above

02. Q-KIT-INTL: 2,3,4 above

03. Q-KIT-6: 1,2,3,4,5,6 above

04. Q-KIT-7: 1,2,3,4,5,6,7 above

05. Q-KIT-8: 1,2,3,4,5,6,7,8 above

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-41060-WWVV-Q

April 27, 2024

OUTPUT CONFIGURATION

Common output connector options:



L Type (Coaxial
5.5x2.5mm plug)



C Type (Coaxial
5.5x2.1mm plug)



K Type (Coaxial
3.5x1.3mm plug)



LL Type (5.5x2.5mm
Locking 760k type)



CL Type (5.5x2.1mm
Locking S761k type)



ML2 Type (Molex
housing 43025-0200)



YL3 Type
(KPPX-3P)



YL4 Type (KPPX-4P)



EJ1/2/3/4/5 (EIAJ
RC-5320A type
connectors)



MSB Type (Micro
USB)



USBC Type (USB
Type C)



Inquire for custom
design

For a comprehensive list of options, [click here](#)

Contact GlobTek for your specific requirements or custom solutions.

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-41060-WWVV-Q

April 27, 2024

Approvals

Logo	Description
	Belarus certificate JI By/I 12 03. 1 I . 020 05936 only for GTM41060-2512 and GT-41060-2512
No Logo	CB Certificate IEC 60950-1:2005 (2nd Edition), Am 1: 2009, CB report IEC 60950-1:2005 (2nd Edition), Am 1: 2009 and EN 60950-1:2006 + Am 1:2010 + Am 11:2009 + Am 12:2011
No Logo Applicable	CB for IEC 62368-1:2014 (Third Edition)
	CCC to GB4943.1-2011; GB/T9254-2008 GB17625.1-2012, Tropical <2000
	CE Mark: tested to comply with EN55022:2006/A1:2007 Class B, EN610003-2, EN610003-3 including EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6N EN61000-4-11; EMI: Complies with EN55011 CLASS B and FCC Part 15B - On label or Molded in case
	CHINA SJ/T 11364-2014, China RoHS Chart: http://www.globtek.com/pdf/F-GT-DJD-8.4.1-006%20China%20RoHS%20Declaration%205-20-22.pdf
	UL60950-1, cULus to UL 60950-1, 2nd Edition, 2007-03-27 and CSA C22.2 No. 60950-1-07, 2nd Edition, 2007-03
	
	Certification # TC RU 0585806 Custom Union of Russia, Belarus and Kazakhstan
	FCC PART 15 CLASS B

PROPRIETARY INFORMATION


PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<https://www.globtek.com/ds/JFkPdbZ2bCc/XvB9ax5PjtD.html>

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-41060-WWVV-Q

April 27, 2024

	Bureau Of Indian Standards for GT-41060-2512
	Indoor Use Only - Mark is on the label or Molded in the case
IP40	Ingress Protection: ?IP40 to IEC60529:2001 Protection against granular foreign bodies
IP52 OPTIONAL	Ingress Protection: ?IP52 to IEC60529:2001 Protected against dust - limited ingress (no harmful deposit) and Protected against direct sprays up to 15 degrees from the vertical
 DC-E-G71-002.1 PRECAUCION: PARA USO EN EQUIPOS ELECTRONICOS SOLAMENTE	IRAM certificate DC-E-G71-002.1 to IEC 60950 + A1:2009
 GlobTek, Inc.	JAPAN TUV R-PSE, Cert. No. JD 50314327, to J60950-1(H26) , J55022(H22),J3000(H25) [15V?30V]. Please reference the following website for guidelines on PSE regulations: https://www.globtek.com/r2/Szj4Vb
 GlobTek, Inc.	JAPAN TUV R-PSE, Cert. No. JD 50314327, to J60950-1(H26) , J55022(H22),J3000(H25)[15V or less]. Please reference the following website for guidelines on PSE regulations: https://www.globtek.com/r2/Szj4Vb
 직류전원장치 AC/DC ADAPTER KTC HU10173-10024A 최저소비효율기준 인증 제품 모델명:GT-41060-2512 Mfr Name: GLOBTEK (SUZHOU) CO.,LTD A/S Center: 10-6221-6100	Korea KET KC Mark GT-41060-2512 HU10173-10024A (12V Only)
EFFICIENCY LEVEL IV 115V	Efficiency: complies to section 301 of Energy Independence and Security Act (EISA) complies with Energy Star tier 2 (North America), ECP tier 2 (China), MEPS tier 2 (Australia), Code of Conduct (Europe)

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<https://www.globtek.com/ds/JFkPdbZ2bCc/XvB9ax5PjtD.html>

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-41060-WWVV-Q

April 27, 2024

LPS	Limited Power Source GT-41060 9 - 30 volts only
 EEV1191	Natural Resources Canada (NRCAN): CSA Standard C381.1-08, QSP NRCAN EEV1191; http://shop.csa.ca/en/canada/energy-efficiency/canca-c3811-08/invt/27024802008
	Australia and New Zealand Regulatory Compliance, Mark (http://rcm.standards.org.au/rcmfaq/rcmfaq.htm (pending)
RoHS	Specifications of directive 2011/65/EU Annex VI (ROHS-2) with amendment 2015/863-EU (ROHS-3) http://www.ce-mark.com/Rohs%20final.pdf
	UKCA Certification
 10276	Ukraine UKRSepro (Document: www.globtek.com/html/iso_certificates/GT_Ukraine.pdf)
	Japan: Voluntary Control Council for Interference (VCCI)
	WEEE: Complies with EU 2012/19/EU (http://ec.europa.eu/environment/waste/weee/index_en.htm) Mark is on the label or Molded in the case