

Model:GTM21089-WWVV-W2

May 4, 2024

GTM21089-WWVV-W2

Information

Model Number	GTM21089-WWVV-W2
Description	GTM21089-WWVV-W2, Medical Power Supply, Wall Plug-in, Regulated Switchmode AC-DC Power Supply AC Adaptor, , Input Rating: 100-240V~, 50-60 Hz, NEMA 1-15P, North America Blades, Class II 2 Conductors, Output Rating: 19 Watts, Power rating with convection cooling (W) , 3.3-48V in 0.1V increments, Approvals: VCCI; CE; cUR; China RoHS; WEEE; Double Insulation; RoHS;
Model Picture	
Agency Documents	http://www.globtek.info/certs/GTM21089/
CE EC-Declaration	https://www.globtek.com/pdf/ec_declaration/a0O30000007P7Z6EAK
RoHS/RoHS2 Declaration	https://www.globtek.com/pdf/rohs_cert/a0O30000007P7Z6EAK
REACH Declaration	https://www.globtek.com/pdf/iso_certificates/REACH.pdf
Conflict Minerals Declaration	https://www.globtek.com/pdf/conflict-minerals.pdf

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM21089-WWVV-W2

May 4, 2024

MODEL PARAMETERS

Type	Wall Plug-in
Technology	Regulated Switchmode AC-DC Power Supply AC Adaptor
Category	Medical Power Supply
Input Voltage	100-240V~, 50-60 Hz
I/P Amps (A)	0.5A MAX
Wattage (W)	19.0
Vout Range (V)	3.3-48
Efficiency Level	Meets/Exceeds for Medical
Ingress Protection	IP40
Size (mm)	74*49*40.5 + 0.5

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.


<https://www.globtek.com/ds/aHTqschdTnE/bRJouptdLsR.html>

Delivering leading edge, innovative power solutions for more than 30 years....

Model: GTM21089-WWVV-W2

May 4, 2024

ENCLOSURE

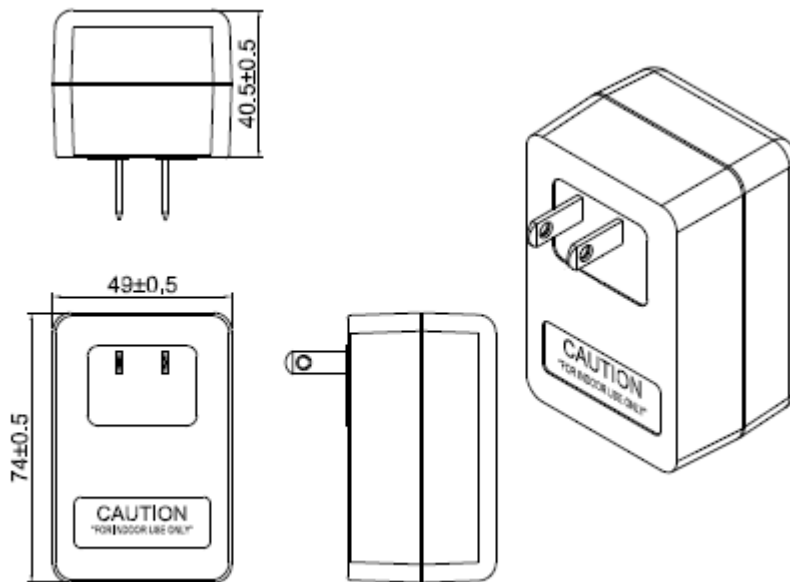

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM21089-WWVV-W2

May 4, 2024

RATING TABLE

Model Number	Voltage	Amps(A)	Watts(W)	RFQ
GTM21089-0903-W2	3.3 V	2.6	8.58	RFQ
GTM21089-1305-1.0-T3	4 V	2.6	10.40	RFQ
GTM21089-1305-W2	5 V	2.6	13.00	RFQ
GTM21089-1506-W2	6 V	2.5	15.00	RFQ
GTM21089-1509-W2	9 V	1.7	15.30	RFQ
GTM21089-1512-W2	12 V	1.25	15.00	RFQ
GTM21089-1815-W2	15 V	1.2	18.00	RFQ
GTM21089-1818-W2	18 V	1	18.00	RFQ
GTM21089-1824-W2	24 V	0.75	18.00	RFQ
GTM21089-1848-15-W2	33 V	0.54	17.82	RFQ
GTM21089-1836-W2	36 V	0.5	18.00	RFQ
GTM21089-1948-W2	48 V	0.39	18.72	RFQ

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<https://www.globtek.com/ds/aHTqschdTnE/bRJouptdLsR.html>

Model:GTM21089-WWVV-W2

May 4, 2024

SPECIFICATIONS

A) ELECTRICAL SPECIFICATIONS:

01. Input Voltage: 90-264 Vac
02. INPUT CURRENT: <0.5Arms AT 90Vac INPUT
03. Input Frequency: 47 - 63 Hz
04. Output Regulation: +/- 5% measured at the output connector, no minimum load required
05. Line Voltage Regulation: +/- 1% typical measured at full load
06. Output Ripple (Vp-p): 1% or 100 mV whichever is greater, measured at 20 MHz bandwidth with 0.1 uf ceramic capacitor in parallel with a low impedance 47 uf electrolytic capacitor connected at the end of the output connector
07. Turn-ON/OFF: 5% maximum, 1 mS typical recovery time for 25% step load
08. Turn-ON Delay: 1 Sec, typical
09. Hold-Up Time: 10 mS typical @ nominal input voltage and full load
10. Inrush Current: 30A maximum cold start @ 240Vac input
11. Switching Frequency: 100 KHz typical, varies with line and load
12. Efficiency: 75% typical at nominal input and full load

B) PROTECTION

01. Over-Voltage: Limited via crowbar method
02. Short Circuit: Momentary short circuit protected with auto recovery upon removal of short
03. Over-load: Hiccup with auto recovery
04. Input Protection: Input line and neutral fusing

C) SAFETY

01. Dielectric Withstand Voltage: 5656vdc from primary to secondary
02. Type of protection against electric shock: class II
03. Degree of protection against electric shock: not classified (no applied part)
04. Degree of protection Against ingress of water: IPXO (ordinary)
05. Degree of safety of application in the presence of flammable anesthetic: not evaluated Mode of operation: continuous
06. Touch Current: Maximum allowed values: 100uA NC(Normal condition) 500uA SFC(single fault condition)

D) OTHER:

01. MTBF: 200,000 Hours @ 25°C ambient temperature
02. Operating Temperature: 0°C to 40°C ambient temperature
03. Storage Temperature: -10°C to 80°C
04. Humidity: 0% to 90% relative humidity

E) ENCLOSURE

1. Upper Housing: High impact plastic, 94V0 polycarbonate, non-vented
2. Lower Housing: High impact plastic, 94V0 polycarbonate, non-vented
3. Size: 74*49*40.5 + 0.5 mm +/-1.0

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GTM21089-WVVV-W2

May 4, 2024

DERATING CURVE

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GTM21089-WWVV-W2

May 4, 2024

INPUT CONFIGURATION

Description	NEMA 1-15P, North America Blades, Class II 2 Conductors
-------------	---

All NEMA 1 devices are two-wire non-grounding devices (hot-neutral) rated for 125 V maximum. NEMA 1-15P plugs have two parallel flat blades, 0.25 inches (6.35 mm) wide, 0.06 inches (1.524 mm) thick, 0.625-0.718 inches (15.875–18.256 mm) long, and spaced 0.5 inches (12.7 mm) apart.

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM21089-WWVV-W2

May 4, 2024

OUTPUT CONFIGURATION

Common output connector options:



L Type (Coaxial
5.5x2.5mm plug)



C Type (Coaxial
5.5x2.1mm plug)



K Type (Coaxial
3.5x1.3mm plug)



LL Type (5.5x2.5mm
Locking 760k type)



CL Type (5.5x2.1mm
Locking S761k type)



ML2 Type (Molex
housing 43025-0200)



YL3 Type
(KPPX-3P)



YL4 Type (KPPX-4P)



EJ1/2/3/4/5 (EIAJ
RC-5320A type
connectors)



MSB Type (Micro
USB)



USBC Type (USB
Type C)



Inquire for custom
design

For a comprehensive list of options, [click here](#)

Contact GlobTek for your specific requirements or custom solutions.

Model:GTM21089-WWVV-W2

May 4, 2024

Approvals

Logo	Description
	Attention Mark / Refer to operating manual for operating and service instructions
	CE Mark: tested to comply with EN61000-3-2, EN61000-3-3 and EN50082-1, including EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, EN61000-4-8, EN61000-4-11, EN61001-1-2-2007 EMI: Complies with EN55011 CLASS B and FCC Part 15 B
	CHINA SJ/T 11363-2006, China RoHS Chart: http://en.globtek.com/globtek-rohs.php
	UR 60601-1, File #E172861 or Optional E341350, 1st Edition, 2006-04-26 CAN/CSA-C22.2 No. 601.1-M90, 2005
	
	Indoor Use Only - Mark is on the label or Molded in the case
RoHS	Specifications of directive 2011/65/EU Annex VI (ROHS-2) with amendment 2015/863-EU (ROHS-3) http://www.ce-mark.com/Rohs%20final.pdf
	Japan: Voluntary Control Council for Interference (VCCI)
	WEEE: Complies with EU 2012/19/EU (http://ec.europa.eu/environment/waste/weee/index_en.htm) Mark is on the label or Molded in the case