

Model:GTM41134-06VV-Q

May 6, 2024

Medical Grade Power Supply Wall plug in Adapter certified for ITE 60950-1, Medical 60601-1 3rd Edition 2MOOP, 60335-1 Household Use, and 61558 Electrical Transformer certified, available from 3-48VDC outputs

## Information

|                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Model Number                  | GTM41134-06VV-Q                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Description                   | GTM41134-06VV-Q, Medical/ICT/ITE/Household use Power Supply, 60601-1-4th Ed. , Wall Plug-in, Regulated Switchmode AC-DC Power Supply AC Adaptor, , Input Rating: 100-240V~, 50-60 Hz, Blade Options for Q Series Wall Plug-in Power Supplies, Output Rating: 6 Watts, Power rating with convection cooling (W) , 5-48V in 0.1V increments, Approvals: UL 1310; cETLus 60601-1-11; cETLus 60950-1; UKCA; Conforms to 62368-1; LPS 62368; ETL 62368 (6W max); India BIS 5, 5.2, 6, 6.5, 7.5, 9, 12, 19, 24 and 48V only; cRUus; S-Mark IEC/EN 60601-1 60950; cETLus; VCCI; CE; Ukraine; RoHS; cETLus 60601-1 3rd (6W max); WEEE; CB 60601-1 2MOPP (6W max); CB EN/IEC 60335-1; Fuse 60335; Book 60601; Double Insulation; Level V; China RoHS; Fuse 60335; CCC; IP52; LPS 60950; CE; 61558-1; IEC 61558-1; S-Mark 62368; PSE; PSE; PSE; EAC; CB 62368; CB 61558-2-16; RCM; |
| Model Picture                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Agency Documents              | <a href="http://www.globtek.info/certs/GTM41134/">http://www.globtek.info/certs/GTM41134/</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| CE EC-Declaration             | <a href="https://www.globtek.com/pdf/ec_declaration/a0Oa000000C147NEAR">https://www.globtek.com/pdf/ec_declaration/a0Oa000000C147NEAR</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| RoHS/RoHS2 Declaration        | <a href="https://www.globtek.com/pdf/rohs_cert/a0Oa000000C147NEAR">https://www.globtek.com/pdf/rohs_cert/a0Oa000000C147NEAR</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| REACH Declaration             | <a href="https://www.globtek.com/pdf/iso_certificates/REACH.pdf">https://www.globtek.com/pdf/iso_certificates/REACH.pdf</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Conflict Minerals Declaration | <a href="https://www.globtek.com/pdf/conflict-minerals.pdf">https://www.globtek.com/pdf/conflict-minerals.pdf</a>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM41134-06VV-Q

May 6, 2024

**MODEL PARAMETERS**

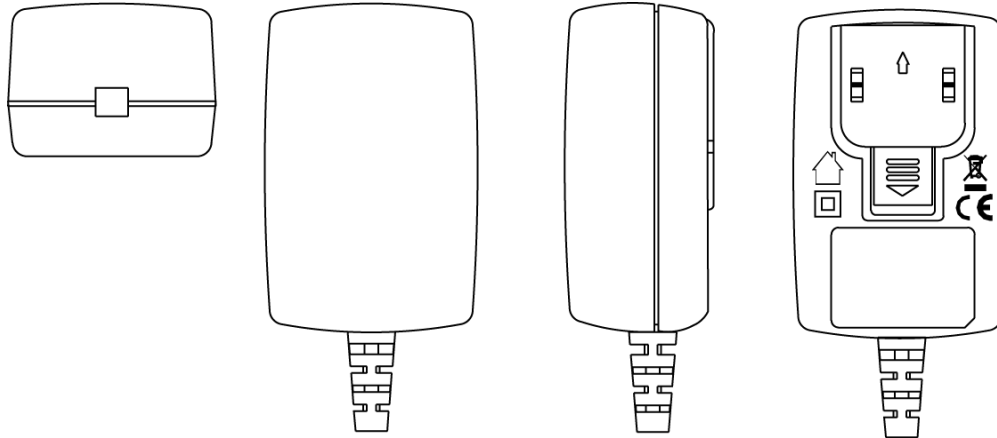
|                    |                                                    |
|--------------------|----------------------------------------------------|
| Type               | Wall Plug-in                                       |
| Technology         | Regulated Switchmode AC-DC Power Supply AC Adaptor |
| Category           | Medical/ICT/ITE/Household use Power Supply         |
| Input Voltage      | 100-240V~, 50-60 Hz                                |
| I/P Amps (A)       | 0.6A                                               |
| Wattage (W)        | 6.0                                                |
| Vout Range (V)     | 5-48                                               |
| Efficiency Level   | V                                                  |
| Ingress Protection | IP52                                               |
| Size (mm)          | 43.5*74.0*35.3                                     |

Delivering leading edge, innovative power solutions for more than 30 years....

Model: GTM41134-06VV-Q

May 6, 2024

## ENCLOSURE



LED INDICATOR: LED INDICATOR AVAILABLE UPON REQUEST. GREEN INDICATES POWER PRESENT.

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM41134-06VV-Q

May 6, 2024

# RATING TABLE

| Model Number      | Voltage | Amps(A) | Watts(W) | RFQ                 |
|-------------------|---------|---------|----------|---------------------|
| GTM41134-0603     | 3.3 V   | 1.81    | 5.97     | <a href="#">RFQ</a> |
| GTM41134-0605     | 5 V     | 1.2     | 6.00     | <a href="#">RFQ</a> |
| GTM41134-0606-1.0 | 5 V     | 1.2     | 6.00     | <a href="#">RFQ</a> |
| GTM41134-0606-0.8 | 5.2 V   | 1.15    | 5.98     | <a href="#">RFQ</a> |
| GTM41134-0606     | 6 V     | 1       | 6.00     | <a href="#">RFQ</a> |
| GTM41134-0612-5.5 | 6.5 V   | 0.92    | 5.98     | <a href="#">RFQ</a> |
| GTM41134-0612-5.0 | 7 V     | 0.86    | 6.02     | <a href="#">RFQ</a> |
| GTM41134-0612-4.5 | 7.5 V   | 0.8     | 6.00     | <a href="#">RFQ</a> |
| GTM41134-0612-4.0 | 8 V     | 0.3     | 2.40     | <a href="#">RFQ</a> |
| GTM41134-0612-3.0 | 9 V     | 0.66    | 5.94     | <a href="#">RFQ</a> |
| GTM41134-0612     | 12 V    | 0.5     | 6.00     | <a href="#">RFQ</a> |
| GTM41134-0615     | 15 V    | 0.4     | 6.00     | <a href="#">RFQ</a> |
| GTM41134-0618     | 18 V    | 0.33    | 5.94     | <a href="#">RFQ</a> |
| GTM41134-0624     | 24 V    | 0.25    | 6.00     | <a href="#">RFQ</a> |
| GTM41134-0636-7.8 | 28.2 V  | 0.212   | 5.98     | <a href="#">RFQ</a> |
| GTM41134-0636     | 36 V    | 0.16    | 5.76     | <a href="#">RFQ</a> |
| GTM41134-0648     | 48 V    | 0.12    | 5.76     | <a href="#">RFQ</a> |

Model:GTM41134-06VV-Q

May 6, 2024

## SPECIFICATIONS

### A) ELECTRICAL SPECIFICATIONS:

01. Input Voltage: Specified 90-264 Vac, Nameplate rated: 100-240Vac
02. Input Frequency: Specified 47-63 Hz, Nameplate rated 50-60Hz
03. Output Current: Current limited to rated output current with tolerance of +/-10%
04. Output Regulation: +/- 5% measured at the output connector
05. Line Voltage Regulation: +/- 1% typical measures at full load
06. Output Ripple (Vp-p): 1% or 150 mV whichever is greater measured at 20 MHz bandwidth with 0.1 uf ceramic capacitor in parallel with 10 uf electrolytic capacitor connected at the end of output connector at nominal line
07. Turn-On/Turn-Off Overshoot: 5% maximum, 1mS typical recovery time for 25% step load
08. Turn-On Delay: 1 second typical
09. Hold-Up Time: 8mS typical @ nominal input voltage & full load
10. Inrush Current: 30A typical @ 115Vac input ; 60A typical @ 230Vac input
11. Switching Frequency: 65 KHz typical

### B) PROTECTION

1. Over-Voltage: Unit will recover upon removal of fault
2. Short Circuit: Electronically Protected, unit will recover upon removal of fault
3. Input Protection: Input line fusing

### C) SAFETY

1. Dielectric Withstand Voltage: Input-Output: 5656Vdc, (2 MOPP)
2. Earth Leakage Current: N/A for Class II units, there is no PE Ground pin, so Earth Leakage current is not measured
3. Touch Current: Maximum allowed values: 100uA NC(Normal condition) 500uA SFC(single fault condition)
4. Means of Protection: 2 x MOPP
5. Primary to Secondary Bridging Capacitor: Standard configuration provided without bridging capacitors, Two (2) \* Y1 type capacitors in series is available as an option upon customer request. If option employed, it is to be noted in the product deviation section of this specification document.

### D) OTHER:

1. MTBF: 200,000 hours @ 25°C ambient temperature
  2. Operating Temperature: 0°C to 40°C ambient temperature
  3. Humidity: 0% to 95% relative humidity (RFP RFI-33542-1)
  4. Storage Temperature: -20°C to 80°C
- Normal performance after 2h recovery time at the room temperature without connection to mains (RFP RFI-33542-1)

### E) ENCLOSURE

1. Upper Housing: High impact plastic, 94V0 polycarbonate, non-vented
2. Lower Housing: High impact plastic, 94V0 polycarbonate, non-vented
3. Size: 43.5 x 74.0 x 35.3mm +/- 1.0

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GTM41134-06VV-Q

May 6, 2024

## DERATING CURVE

---

Model:GTM41134-06VV-Q

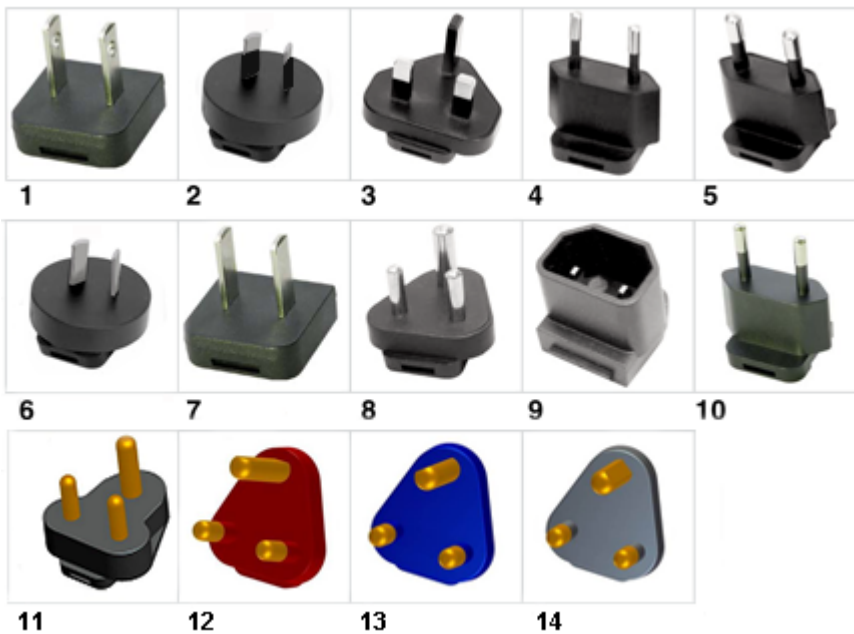
May 6, 2024

## INPUT CONFIGURATION

Description Blade Options for Q Series Wall Plug-in Power Supplies

Data Sheet: <http://en.globtek.com/interchangeable-blades.php>

Insertion Instructions: <http://www.globtek.com/pdf/Instructions-Interchangeable-Blades.pdf>

Video: [Q-Blade Style Instruction Video](#)


INPUT CONNECTOR: Q-Socket (below are available blades configurations which are "not included" (unless stated above); can be purchased separately, package with power supply or as a separate "Q-KIT" if specified

01. United States / Canada / Japan NEMA 1-15P/ IEC PLUG Type A [WORKS IN PLUG B] configuration: NA 2 blades, Class II; US/CA/JP P/N: Q-NA(R)
02. Australian AS 3112 configuration: SAA 2 blade/ IEC TYPE I, Class II; AU P/N: Q-SAA(R)
03. UK BS 1363 configuration: UK 3 blade with dummy Ground/ IEC TYPE G, Class II; GB P/N: Q-UK(R)
04. European CEE 7/16 configuration: Europlug 2 pins/ IEC TYPE C [WORKS IN TYPE E&F], Class II; EU P/N: Q-EU(R)
05. Korean KS C8305 configuration: 2 pins/SIMILAR TO IEC TYPE C, Class II; KR P/N: Q-KR(R)
06. Argentina IRAM 2073 configuration: 2 blades/SIMILAR TO IEC TYPE I; AR P/N: Class II Q-AR(R)
07. China GB 2099 configuration: 2 blades/SIMILAR TO TYPE A, Class II; CN P/N: Q-CN(R)
08. India IS 1293 6A/BS546 configuration: 5A, 3 pins with Dummy Ground, Class II/IEC TYPE D; IN P/N: Q-IN(R)
09. IEC60320/C18 Inlet, Class II; P/N: Q-C18(R)
10. Brazilian NBR6147 configuration: 2 pins, Class II;SIMILAR TO IEC TYPE C BR P/N: Q-BR(R)
11. South Africa SABS164-1 and India IS 1293, IS694, 16A type plug, 3 round prongs, Class II + dummy ground, IEC TYPE M P/N: Q-SANS164-1-16A(R)
12. South Africa SABS164-4, 3 round prongs with a notched prong @ 0°, Class II + dummy ground, IEC TYPE M Red, P/N: Q-SANS164-4C-16A(R)

### PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<https://www.globtek.com/ds/UbPnirZAo5R/sSsybbXDsjU.html>

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GTM41134-06VV-Q

May 6, 2024

13. South Africa SABS164-4, 3 round prongs with a notched prong @ -53°, Class II + dummy ground, Blue, IEC TYPE M,  
P/N:

Q-SANS164-4L-16A(R)

14. South Africa SABS164-4, 3 round prongs with a notched prong @ +53°, Class II + dummy ground, Black, IEC TYPE M  
P/N:

Q-SANS164-4R-16A(R)

**Kits**

01. Q-KIT: 1,2,3,4 above

02. Q-KIT-INTL: 2,3,4 above

03. Q-KIT-6: 1,2,3,4,5,6 above

04. Q-KIT-7: 1,2,3,4,5,6,7 above

05. Q-KIT-8: 1,2,3,4,5,6,7,8 above

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM41134-06VV-Q

May 6, 2024

## OUTPUT CONFIGURATION

Common output connector options:



L Type (Coaxial  
5.5x2.5mm plug)



C Type (Coaxial  
5.5x2.1mm plug)



K Type (Coaxial  
3.5x1.3mm plug)



LL Type (5.5x2.5mm  
Locking 760k type)



CL Type (5.5x2.1mm  
Locking S761k type)



ML2 Type (Molex  
housing 43025-0200)



YL3 Type  
(KPPX-3P)



YL4 Type (KPPX-4P)



EJ1/2/3/4/5 (EIAJ  
RC-5320A type  
connectors)



MSB Type (Micro  
USB)



USBC Type (USB  
Type C)



Inquire for custom  
design

For a comprehensive list of options, [click here](#)

Contact GlobTek for your specific requirements or custom solutions.

Model:GTM41134-06VV-Q

May 6, 2024

## Approvals

| Logo                                                                                        | Description                                                                                                                                                                 |
|---------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|            | Book 60335 up to 36 Volts                                                                                                                                                   |
|            | 60601-1 3rd Operating Instructions                                                                                                                                          |
| No Logo Applicable                                                                          | CB report IEC60601-1 2005 A1+C1+C2 2016-2-4 and or EN 60601-1:2006 3.1rd Edition 2xMOPP (6W max)                                                                            |
| No Logo Applicable                                                                          | CB for IEC 62368-1:2014 (Second Edition)                                                                                                                                    |
| No Logo Applicable                                                                          | CB to 60335-1 5th Edition (Safety of Household and Similar Electrical Appliances, Part 1: General Requirements) CB Report/ Certificate IEC 60335-1:2010 Up to 36 volts only |
| No Logo Applicable                                                                          | CB report to IEC 61558-2-16_2009 1st Edition IEC 61558-1_2005 2nd Edition + A1_2009 EN 61558-1-16_2009 EN 61558-1_2005 + A1_2009.pdf                                        |
| <br>5000 | CCC Altitude up to 5000 m<br>GB17625.1-2012, GB4943.1-2011, GB/T9254-2008                                                                                                   |
|          | CE Certification                                                                                                                                                            |
|          | CE Certification<br>CE Mark: tested to comply with EN 55032.2012+AC.2013 EN 61000-3-2.2014 EN 61000-3-3.2013 EN 60601-1-2.2015 EN 55024.2010                                |
|          | Audio/Video, Information And Communication Technology Equipment - Part 1: Safety Requirements [UL 62368-1:2014 Ed.2]                                                        |

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM41134-06VV-Q


May 6, 2024

|                                                                                                     |                                                                                                                                                                                                                                                                 |
|-----------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                                                     | Audio/Video, Information And Communication Technology Equipment - Part 1: Safety Requirements [CSA<br>C22.2#62368-1:2014 Ed.2] (6W max)                                                                                                                         |
|                    | AAMI ES60601-1 Issued: 2012/08/20 Medical Electrical Equipment - Part 1: CAN/CSA-C22.2 No.60601-1:14, Third Edition Issued: 2014/03/01 - Medical Electrical Equipment - Part 1:IEC 60601-1-11 Issued: 2015/01/20 Ed. 2 Medical Elec. Equip.- Part 1-11: (6W max |
|                    | cETLus-Cert-60950-1 4007497 Listed                                                                                                                                                                                                                              |
|                    | CHINA SJ/T 11364-2014, China RoHS Chart:<br><a href="http://www.globtek.com/pdf/F-GT-DJD-8.4.1-006%20China%20RoHS%20Declaration%205-20-22.pdf">http://www.globtek.com/pdf/F-GT-DJD-8.4.1-006%20China%20RoHS%20Declaration%205-20-22.pdf</a>                     |
| Conforms to AAMI<br>STD.ES60601-1,IEC<br>60601-1-11<br>Certified to CAN/CSA<br>STD.C22.2 NO.60601-1 | Conforms to AAMI STD.ES60601-1,IEC 60601-1-11<br>Certified to CAN/CSA STD.C22.2 NO.60601-1                                                                                                                                                                      |
| Conforms to UL STD. 1310<br>Certified to CSA STD.<br>C22.2 NO.223                                   | Conforms to UL STD. 1310<br>Certified to CSA STD. C22.2 NO.223                                                                                                                                                                                                  |
| Conforms to UL STD.<br>60950-1<br>Certified to CSA STD<br>C22.2 NO.60950-1                          | Conforms to UL STD. 60950-1<br>Certified to CSA STD C22.2 NO.60950-1                                                                                                                                                                                            |
| Conforms to UL STD.<br>62368-1<br>Certified to CSA STD<br>C22.2 NO.62368-1                          | Conforms to UL STD. 62368-1<br>Certified to CSA STD C22.2 NO.62368-1                                                                                                                                                                                            |
|                  | cRUus UL Recognized Component E172861 3rd Edition w-RM ANSI-AAMI ES60601-1 (2005 + C1:09 + A2:10) and CAN-CSA-C22.2 No. 60601-1 (2008)                                                                                                                          |
|                  |                                                                                                                                                                                                                                                                 |

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM41134-06VV-Q

May 6, 2024

|                                                                                                                                                       |                                                                                                                                                                                                                                                                |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                                                                      | Certification # TC RU AR46.B.75423 Custom Union of Russia, Belarus and Kazakhstan                                                                                                                                                                              |
|                                                                      | Fuse 60335 T1.0A 250VAC Up to 36 volts                                                                                                                                                                                                                         |
| <b>Ta:40°C</b>                                                                                                                                        | IEC 60601-1 GTM41134 Maximum Ambient Temperature, Max 40°C                                                                                                                                                                                                     |
| IS 13252 (Part 1)<br>IEC 60950-1<br><br>R-41017175<br>www.bis.gov.in | INDIA BIS GTM41134 5, 5.2, 6, 6.5, 7.5, 9, 12, 19, 24 and 48V only                                                                                                                                                                                             |
|                                                                    | Indoor Use Only - Mark is on the label or Molded in the case                                                                                                                                                                                                   |
| IP52                                                                                                                                                  | Ingress Protection: ?IP52 to IEC60529:2001 Protected against dust - limited ingress (no harmful deposit) and Protected against direct sprays up to 15 degrees from the vertical                                                                                |
| <br>GlobTek, Inc.                                                  | JAPAN TUV R-PSE, Cert. No. JD 50471624, to J62368-1(H30) , J55032(H29),J3000(H25,[15V or less]. Please reference the following website for guidelines on PSE regulations:<br><a href="https://www.globtek.com/r2/Szj4Vb">https://www.globtek.com/r2/Szj4Vb</a> |
| <br>GlobTek, Inc.                                                  | JAPAN TUV R-PSE, Cert. No. JD 50471624 J62368-1(H30) , J55032(H29),J3000(H25),[DC15V?30V]. Please reference the following website for guidelines on PSE regulations: <a href="https://www.globtek.com/r2/Szj4Vb">https://www.globtek.com/r2/Szj4Vb</a>         |
| <br>GlobTek, Inc.                                                  | JAPAN TUV R-PSE, Cert. No. JD 50471624, to J62368-1(H30) , J55032(H29),J3000(H25),[DC30V?60V]. Please reference the following website for guidelines on PSE regulations: <a href="https://www.globtek.com/r2/Szj4Vb">https://www.globtek.com/r2/Szj4Vb</a>     |
| <b>EFFICIENCY LEVEL</b>                                            | Efficiency: complies to section 301 of Energy Independence and Security Act (EISA) complies with Energy Star tier 2 (North America), ECP tier 2 (China), MEPS tier 2 (Australia), Code of Conduct (Europe)                                                     |
| LPS                                                                                                                                                   | Limited Power Source 60950                                                                                                                                                                                                                                     |

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM41134-06VV-Q

May 6, 2024

|                                                                                                                              |                                                                                                                                                                                                                   |
|------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LPS                                                                                                                          | Limited Power Source 62368                                                                                                                                                                                        |
|  N136<br>SAA-210640-EA                      | RCM certificate SAA-210640-EA; Australia and New Zealand Regulatory Compliance, Mark ( <a href="http://rcm.standards.org.au/rcmfag/rcmfag.htm">http://rcm.standards.org.au/rcmfag/rcmfag.htm</a> )                |
| RoHS                                                                                                                         | Specifications of directive 2011/65/EU Annex VI (ROHS-2) with amendment 2015/863-EU (ROHS-3) <a href="http://www.ce-mark.com/Rohs%20final.pdf">http://www.ce-mark.com/Rohs%20final.pdf</a>                        |
|                                             | S-Mark Certificate EN 62368-1:2014 + A11 ( <a href="http://www.intertek.com/marks/s/">http://www.intertek.com/marks/s/</a> )                                                                                      |
|  Intertek<br>IEC/EN60601-1<br>IEC/EN60950-1 | Semko S-Mark-Cert-EN60601-1 and EN60950-1                                                                                                                                                                         |
|                                           | Transformer Symbol IEC 61558-1 SMPS Short-Circuit –Proof Safety Isolating Transformer                                                                                                                             |
|                                           | Transformer Symbol IEC 61558-1 SMPS Switch Mode Power supply                                                                                                                                                      |
|                                           | UKCA Certification                                                                                                                                                                                                |
|  10276                                    | Ukraine UKRSepro (Document: <a href="http://www.globtek.com/html/iso_certificates/GT_Ukraine.pdf">www.globtek.com/html/iso_certificates/GT_Ukraine.pdf</a> )                                                      |
|                                           | Japan: Voluntary Control Council for Interference (VCCI)                                                                                                                                                          |
|                                           | WEEE: Complies with EU 2012/19/EU ( <a href="http://ec.europa.eu/environment/waste/weee/index_en.htm">http://ec.europa.eu/environment/waste/weee/index_en.htm</a> )<br>Mark is on the label or Molded in the case |