

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-41069P90VV-x.x-T3A

April 28, 2024

GT-41069P90VV-x.x-T3A

Information

Model Number	GT-41069P90VV-x.x-T3A
Description	GT-41069P90VV-x.x-T3A, ICT/ITE Power Supply, Desktop/External, Regulated Switchmode AC-DC Power Supply AC Adaptor, , Input Rating: 100-240V~, 50-60 Hz, IEC 60320/C6 AC Inlet Connector, Class I, Earth Ground (aka "Mickey Mouse"), Output Rating: 90 Watts, Power rating with convection cooling (W) , 12-24, 48V in 0.1V increments, Approvals: CB 60950; CCC; CE; China RoHS; Class I; FCC; GOST-R; IP40; Level IV; LPS; PSE; RoHS; Designed to meet EN 60601-1; Ukraine; VCCI; WEEE; PSE; cULus;
Model Picture	
Agency Documents	http://www.globtek.info/certs/GT-41069P/
CE EC-Declaration	https://www.globtek.com/pdf/ec_declaration/a0Oa000000C16E4EAJ
RoHS/RoHS2 Declaration	https://www.globtek.com/pdf/rohs_cert/a0Oa000000C16E4EAJ
REACH Declaration	https://www.globtek.com/pdf/iso_certificates/REACH.pdf
Conflict Minerals Declaration	https://www.globtek.com/pdf/conflict-minerals.pdf

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-41069P90VV-x.x-T3A

April 28, 2024

MODEL PARAMETERS


Type	Desktop/External
Technology	Regulated Switchmode AC-DC Power Supply AC Adaptor
Category	ICT/ITE Power Supply
Input Voltage	100-240V~, 50-60 Hz
I/P Amps (A)	1.5A
Wattage (W)	90.0
Vout Range (V)	12-24, 48
Efficiency Level	V
Ingress Protection	
Size (mm)	167*62*34

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-41069P90VV-x.x-T3A

April 28, 2024

ENCLOSURE

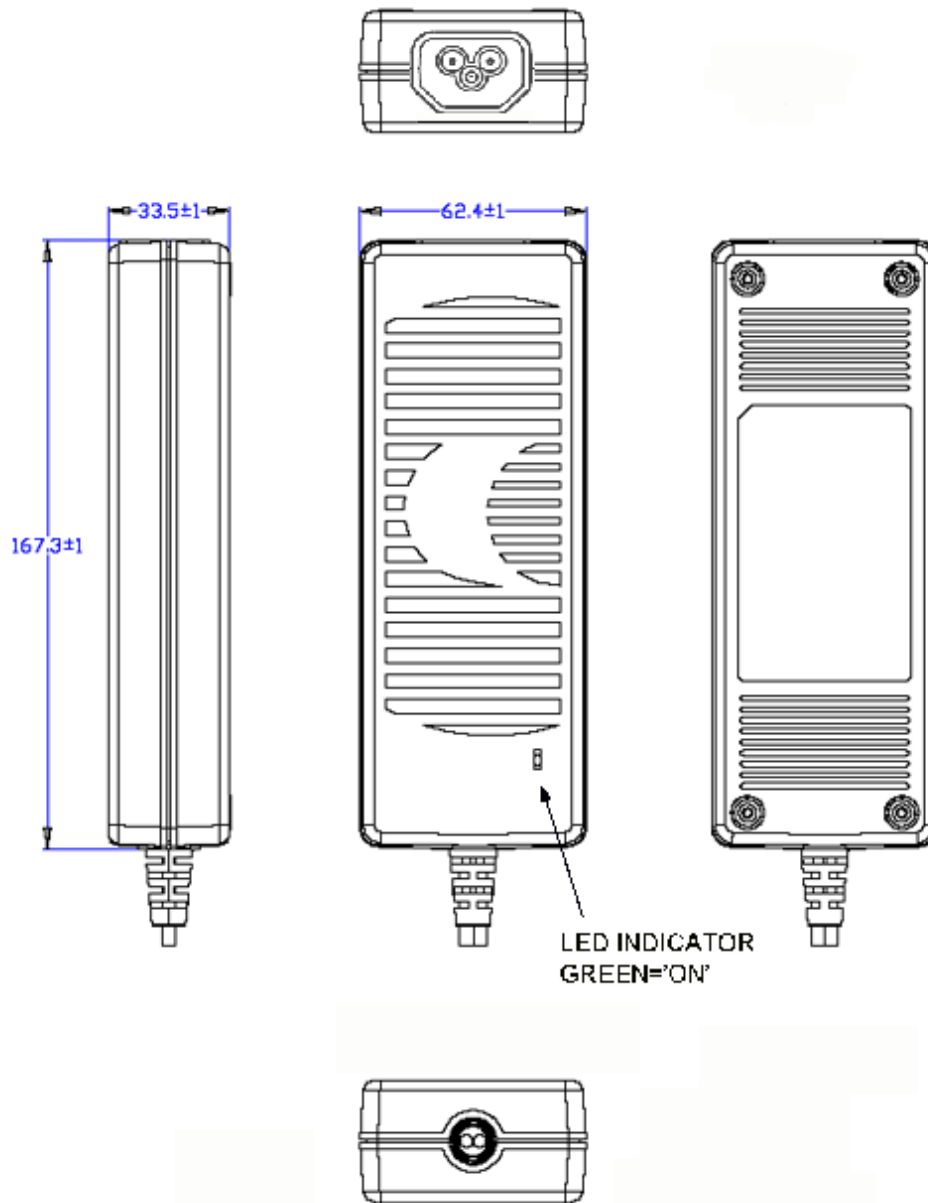

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-41069P90VV-x.x-T3A

April 28, 2024

RATING TABLE

Model Number	Voltage	Amps(A)	Watts(W)	RFQ
GT-41069P9012-T3A	12 V	7.5	90.00	RFQ
GT-41069P9018.9-3.9-T3A	15 V	6	90.00	RFQ
GT-41069P9018.9-3.0-T3A	15.9 V	5.66	89.99	RFQ
GT-41069P9018.9-2.9-T3A	16 V	5.625	90.00	RFQ
GT-41069P9018.9-0.9-T3A	18 V	5	90.00	RFQ
GT-41069P9018.9-T3A	18.9 V	4.76	89.96	RFQ
GT-41069P9024-5.0-T3A	19 V	4.74	90.06	RFQ
GT-41069P9024-T3A	24 V	3.75	90.00	RFQ

Model:GT-41069P90VV-x.x-T3A

April 28, 2024

SPECIFICATIONS

A) ELECTRICAL SPECIFICATIONS:

01. Input Voltage: Specified 90-264 Vac, Nameplate rated: 100-240Vac
02. Input Frequency: Specified 47-63 Hz, Nameplate rated 50-60Hz
03. Output Regulation: +/- 5% measured at the output connector
04. Line Voltage Regulation: +/- 1% typical measured at full load
05. Output Ripple (Vp-p): +/-1% or 50 mV whichever is greater, measured at 20 MHz bandwidth with 0.1 uf ceramic capacitor in parallel with 10 uf electrolytic capacitor connected at the end of the output connector
06. Turn-ON/OFF Overshoot: 5% maximum, 500 uS typical recovery time for 25% to 50% step load
07. Turn-ON Delay: 3 S, maximum @ full load, 115 Vin
08. Hold-Up Time: 8 mS typical @ nominal input voltage and full load
09. Inrush Current: 80/120A maximum cold start @ 120 / 240 Vac input
10. Switching Frequency: 100 KHz typical

B) PROTECTION

01. Over-Voltage: Electronically Protected Zener clamp across the output, AC cycling to reset output
02. Over-Current: Protected, AC cycling to reset output
03. Short Circuit: Electronically Protected unit will auto recover upon removal of fault
04. Input Protection: Input line fusing
05. Power Factor: 0.90 min. at full load 230Vin
06. No Load Power Consumption: 0.5W maximum (CEC/EISA COMPLIANT)

C) SAFETY

01. Dielectric Withstand Voltage: 4242Vdc from primary to secondary
02. Touch Current: <0.25mA @ 240Vac input voltage
03. Earth leakage current: <3.5mA@240Vac input voltage
04. Earth continuity test:<0.1 Ohm or < 0.2 Ohm when with a non-detachable Power Supply cord, Class I Only
05. ROHS 2: Complies with EU 2011/65/EU and China SO/T 11363-2006

D) OTHER:

01. MTBF: 200,000 Hours @ 25°C ambient temperature
02. Operating Temperature: 0°C to 40°C ambient temperature
03. Humidity: 0% to 90% relative humidity
04. Storage Temperature: -10°C to 80°C
05. Cooling: Convection

E) ENCLOSURE

01. Housing: High impact plastic, 94V0 polycarbonate, non-vented
02. Size: 167.3*62.4*33.5 +/-1.0 mm
03. LED indicator color : "Green"
04. Markings: Label and/or Pad Printed and/or Molded in the case

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<https://www.globtek.com/ds/7rZdnyDavVc/2QVF3HBVeWG.html>

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-41069P90VV-x.x-T3A

April 28, 2024


DERATING CURVE

Model:GT-41069P90VV-x.x-T3A

April 28, 2024

INPUT CONFIGURATION

Description IEC 60320/C6 AC Inlet Connector, Class I, Earth Ground (aka "Mickey Mouse")



Mates with IEC 60320/C5 Plug

Standard International IEC 320/C5 Cordsets

Below are standard cordsets which are "not included" (unless stated above); these can be purchased separately or package with the power supply. Contact your Sales Engineer if the style required is not shown below. Many more available in different lengths, colors or cable material.

Part Number / Link	Country	Plug	Connector	Length (mm)	Length (ft)
3021066F712(R)	N. American (Type B)	NEMA 5-15P	IEC 320/C5 1880	6	
1191068F0712(R)	N. American (Type B)	NEMA 5-15P Hospital	IEC 320/C5 2459	8	
2194262M0712(R)	Argentina (Type I)	IRAM 2073	IEC320/C5 2050	6.7	
2064262M0712(R)	Australian (Type I)	AS3112 / 3 PRONG	IEC 320/C5 2000	6.6	
204B4262M0712(R)	Brazil (Type N)	BRAZIL	IEC 320/C5 2000	6.6	
6023592M5712(R)	China (Type I)	CCC GR2099	IEC 320/C5 2500	8	
23144262M0712(R)	Europe (Type E)	CEE 7/7	IEC 320/C5 2050	6.6	
2313K3432M0712(R)	Korea (Type F)	KS C 8305	IEC 320/C5 2000	6.6	
205IN4262M0712(R)	India (Type D)	India IS 1293 (also known as IA16A3 or BS546)	IEC320/C5 2000	6.6	
377C4262M0712(R)	Israel (Type H)	ISL	IEC320/C5 2050	6.7	
23024262M0712(R)	Italy (Type L)	CEI 23-16/VII	IEC 320/C5 2000	6.6	
3003316F0712(R)	Japan (Type B)	JIS 8303 / 3 PINS	IEC 320/C5 1830	6	
	Japan / USA	JIS 8303 / 3 PINS +			

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<https://www.globtek.com/ds/7rZdnyDavVc/2QVF3HBVeWG.html>

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-41069P90VV-x.x-T3A

April 28, 2024

3021066F0712ULPSE(R)	(Type B)	NEMA 5-15P	IEC 320/C5 1830	6
2054262M0712(R)	S. Africa (Type D)	South Africa SABS164-1 (6A type plug)	IEC320/C5 2050	6.7
2084262M0712(R)	S.Africa (Type M)	South Africa SABS164-1 (16A type plug)	IEC 320/C5 2000	6.6
23214262M0712(R)	Switzerland (Type J)	SEV 1011 (EL 203)	IEC 320/C5 2000	6.6
3003316F0712(R)	Taiwan (Type B) BSMI		IEC 320/C5 2000	6.6
6104262M0712(R)	UK, Hong Kong, Singapore, Gulf States (Type G)	BS1363	IEC 320/C5 2000	6.6

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-41069P90VV-x.x-T3A

April 28, 2024

OUTPUT CONFIGURATION

Common output connector options:



L Type (Coaxial
5.5x2.5mm plug)



C Type (Coaxial
5.5x2.1mm plug)



K Type (Coaxial
3.5x1.3mm plug)



LL Type (5.5x2.5mm
Locking 760k type)



CL Type (5.5x2.1mm
Locking S761k type)



ML2 Type (Molex
housing 43025-0200)



YL3 Type
(KPPX-3P)



YL4 Type (KPPX-4P)



EJ1/2/3/4/5 (EIAJ
RC-5320A type
connectors)



MSB Type (Micro
USB)



USBC Type (USB
Type C)



Inquire for custom
design

For a comprehensive list of options, [click here](#)

Contact GlobTek for your specific requirements or custom solutions.

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-41069P90VV-x.x-T3A

April 28, 2024

Approvals

Logo	Description
	Attention Mark / Refer to operating manual for operating and service instructions
No Logo	CB Report IEC60950-1:2005 (2nd Edition), Am 1: 2009 + Am 2:2013
	CCC to GB4943.1-2011; GB/T9254-2008 GB17625.1-2012, Tropical <2000
	CE Mark: tested to comply with EN55022:2006/A1:2007 Class B, EN610003-2, EN610003-3 including EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6N EN61000-4-11; EMI: Complies with EN55011 CLASS B and FCC Part 15B - On label or Molded in case
	CHINA SJ/T 11364-2014, China RoHS Chart: http://www.globtek.com/pdf/F-GT-DJD-8.4.1-006%20China%20RoHS%20Declaration%205-20-22.pdf
	UL 60950-1, Information Technology Equipment - Safety - Part 1: General Requirements CAN/CSA C22.2 No. 60950-1-07, Information Technology Equipment - Safety - Part 1: General Requirements
No Logo	Designed to meet EN 60601-1:2006 + A11:2011 +A1:2013 3rd Edition
	FCC PART 15 CLASS B
	GOST-R mark for Russia(Document: http://www.globtek.com/html/iso_certificates/GT_GOST-R.pdf). 03/15/2015. Due to lack of demand, GlobTek will not be renewing it's GOST certification. Please contact your sales engineer for pricing on EAC.
	Indoor Use Only - Mark is on the label or Molded in the case
IP40	Ingress Protection: ?IP40 to IEC60529:2001 Protection against granular foreign bodies
	JAPAN TUV R-PSE, Cert. No. JD 50469658, to J62368-1(H30) , J55032(H29),J3000(H25)[15V or less]. Please reference the following website for guidelines on PSE regulations: https://www.globtek.com/r2/Szj4Vb

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-41069P90VV-x.x-T3A

April 28, 2024

EFFICIENCY LEVEL 	Efficiency: complies to section 301 of Energy Independence and Security Act (EISA) complies with Energy Star tier 2 (North America), ECP tier 2 (China), MEPS tier 2 (Australia), Code of Conduct (Europe)
LPS	Limited Power Source LPS (GT-41069P9012-T3YZ and GT-41069PWW24-X.X-T3YZ only)
 GlobTek, Inc.	JAPAN TUV Rheinland-PSE GlobTek Inc to J60950-1(H26) , J55022(H22),J3000(H25).Please follow the procedure listed in the following link for proper import to Japan: https://www.globtek.com/r2/Szj4Vb
RoHS	Specifications of directive 2011/65/EU Annex VI (ROHS-2) with amendment 2015/863-EU (ROHS-3) http://www.ce-mark.com/Rohs%20final.pdf
	UKCA Certification
 10276	Ukraine UKRSepr (Document: www.globtek.com/html/iso_certificates/GT_Ukraine.pdf)
	Japan: Voluntary Control Council for Interference (VCCI)
	WEEE: Complies with EU 2012/19/EU (http://ec.europa.eu/environment/waste/wEEE/index_en.htm) Mark is on the label or Molded in the case