

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GTM96600-65VV.V-R2

May 3, 2024

GTM96600-65VV.V-R2

Information

| | |
|-------------------------------|---|
| Model Number | GTM96600-65VV.V-R2 |
| Description | 65 W, DoE Level VI, ErP, CoC V5 Tier 2 Efficiency, Hybrid Wall Plug in and Two Prong (C8) Inlet, Desktop Adapter, Ac-Dc Power Supply |
| Model Picture |  |
| Agency Documents | http://www.globtek.info/certs/GTM96600-TZ/ |
| CE EC-Declaration | https://www.globtek.com/pdf/ec_declaration/a0Oa000000FifXUEAZ |
| RoHS/RoHS2 Declaration | https://www.globtek.com/pdf/rohs_cert/a0Oa000000FifXUEAZ |
| REACH Declaration | https://www.globtek.com/pdf/iso_certificates/REACH.pdf |
| Conflict Minerals Declaration | https://www.globtek.com/pdf/conflict-minerals.pdf |

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM96600-65VV.V-R2

May 3, 2024

MODEL PARAMETERS

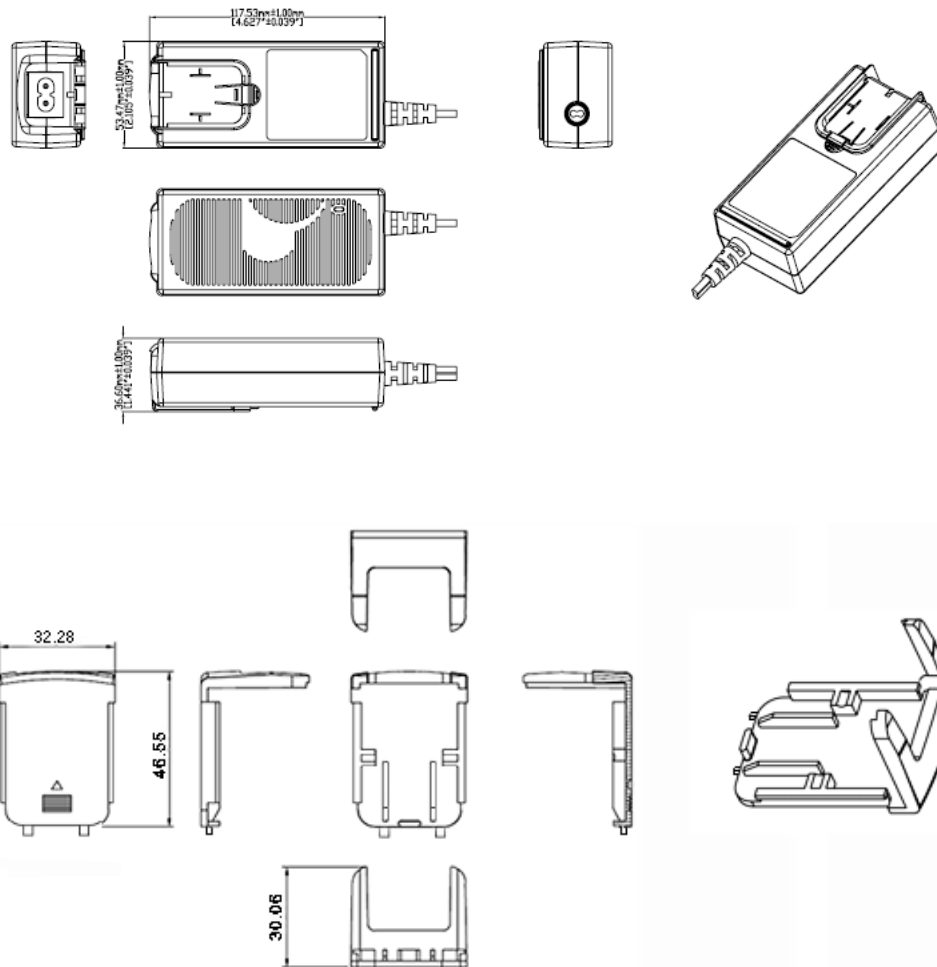
| | |
|--------------------|---|
| Type | Wall Plug-in+Desktop Combination |
| Technology | Regulated Switchmode AC-DC Power Supply AC Adaptor |
| Category | ICT / ITE / Medical Power Supply/Class 2/Household Power Supply |
| Input Voltage | 100-240V~, 50-60 Hz |
| I/P Amps (A) | 1.5 A |
| Wattage (W) | 65.0 |
| Vout Range (V) | 5-54 |
| Efficiency Level | USA DOE Level VI / Eco-design Directive 2009/125/EC, (EU) 2019/1782 |
| Ingress Protection | IP40, IP54 Option available |
| Size (mm) | 117.53*53.47*36.6 |

Delivering leading edge, innovative power solutions for more than 30 years....

Model: GTM96600-65VV.V-R2

May 3, 2024

ENCLOSURE



Unit shipped without an installed input plug.
"Desktop insert" installed.

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM96600-65VV.V-R2

May 3, 2024

RATING TABLE

| Model Number | Voltage | Amps(A) | Watts(W) | RFQ |
|------------------|---------|---------|----------|---------------------|
| GTM96600-6512-R2 | 12 V | 5.41 | 64.92 | RFQ |
| GTM96600-6515-R2 | 15 V | 4.33 | 64.95 | RFQ |
| GTM96600-6518-R2 | 18 V | 3.61 | 64.98 | RFQ |
| GTM96600-6520-R2 | 20 V | 3.25 | 65.00 | RFQ |
| GTM96600-6524-R2 | 24 V | 2.7 | 64.80 | RFQ |
| GTM96600-6530-R2 | 30 V | 2.166 | 64.98 | RFQ |
| GTM96600-6548-R2 | 48 V | 1.35 | 64.80 | RFQ |

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM96600-65VV.V-R2

May 3, 2024

SPECIFICATIONS

Input

| | |
|----------------------|--|
| Input Voltage: | Specified: 90-264VAC, Nameplate: 100-240VAC 100% rated load current for 90-264VAC 85% rated load current for 85-264VAC 100% rated load current for 110-370VDC |
| Input Frequency: | Specified: 47-63Hz, Nameplate: 50-60Hz |
| No Load Input Power: | <75mW @ 230VAC (EU CoC Tier 2 compliant) for ≤ 49W rating <150mW @ 230VAC (EU CoC Tier 2 compliant) for > 49W rating |
| Inrush Current: | 30A/60A max. (cold start @ 115V/230VAC) |
| Efficiency: | DoE Level VI and EU CoC Tier 2 compliant |

Output

| | |
|---------------------|--|
| Turn-on Delay: | 1 second max. @ 115VAC and full load |
| Output Regulation: | ± 5% (measured at output connector) |
| Line Regulation: | ± 0.5% typ. (measured at output connector) |
| Ripple: | 1% or 100mV, whichever is greater (using a 47µF low-ESR cap + 0.1µF ceramic capacitor, measured @ 20MHz BW, at output connector) |
| Transient Response: | 5% max. deviation, 1ms typ. recovery time (with 40% to 70% load step) |
| Hold-up Time: | 8ms typ. (nominal input voltage and full load) |
| Power Indicator: | Green LED |

Protections

| | |
|------------------------------|--|
| Input Protection: | MOV transient suppressor, input line fusing |
| Over-Current Protection: | 110 - 160% of rated output current, auto-restart, current limit range determined by normal output power rating, not de-rated power rating |
| Short-Circuit Protection: | Auto-restart |
| Over-Voltage Protection: | 110 - 130%, latched off, cycle AC to reset |
| Over-Temperature Protection: | On-chip temperature sensor (integrated in primary-side switching controller), shut down at T _j = ~140°C, latched off, cycle AC to reset |

Environmental

| | |
|------------------------|---|
| MTBF: | 1,500,000 hours @ 25°C ambient, full load (Telcordia SR-332, Issue 3) |
| Operating Temperature: | -20°C to 40°C (full load) |
| Storage Temperature: | -30°C to 80°C |
| Humidity: | 0% to 95% relative humidity, non-condensing |
| Altitude: | 5000m |

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<https://www.globtek.com/ds/orFuwJ8iAvH/d2ZGoeWyLmd.html>

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM96600-65VV.V-R2

May 3, 2024

| | |
|----------|--|
| Cooling: | Convection |
| RoHS: | Complies with EU 2011/65/EU and China SJ/T 11363-2006 |
| Note 1: | Regarding operating temperature a. See below de-rating table for output power capability at alternate temperature b. Extended low-end temperature range available as a custom option |

Safety

| | |
|-------------------------------|--|
| Dielectric Withstand Voltage: | 4000VAC or 5656VDC from input to output 3000VAC or 4242VDC from input to earth (Class I models only) |
| Touch Current: | Class I: 20μA max. Class II: 85μA max. Class II F2: 20μA max. |
| Earth Leakage Current | Class I: 300μA max. Class II: N/A |
| Means of Protection: | 2 x MOPP |
| Output Isolation Options: | Class I: C6 or C14 inlet (output negative tied to Earth contact) Class II: C8 or C18 inlet Class II FE: C6 or C14 inlet (output isolated from Earth contact) Review isolation options by reading our white paper PSU Isolation and Identity . |
| Earth Continuity Test: | < 0.1Ω between earth pin (on AC inlet) and PCB termination point (Class I models only) |
| Compliant Standards: | See listing at end of this datasheet for specific standards |

EMC

| | |
|--|--|
| Applicable Standards: | Medical: EN60601-1-2, 4th edition Emissions: EN55032, EN61000-6-3, EN61000-6-4, CISPR11, CISPR22 Immunity: EN55024, EN61000-6-1, EN61000-6-2 |
| Conducted Emissions: | Class B, FCC Part 15, Class B (with resistive load) |
| Radiated Emissions: | Class B, FCC Part 15, Class B (with resistive load) |
| Harmonic Current Voltage Distortion: | EN61000-3-2, Class A |
| Voltage Fluctuations/Flicker: | EN61000-3-3 |
| Electrostatic Discharge (ESD) Immunity: | EN61000-4-2, 10KV contact discharge, 20KV air discharge |
| Radiated RF Immunity: | EN61000-4-3, 10V/m 80-1000MHz, 3V/m 1-2.7GHz, 80% 1KHz AM |
| EFT/Burst Immunity: | EN61000-4-4, 4KV/100kHz. |
| Line Surge Immunity: | EN61000-4-5, 2KV differential, 4KV common-mode |
| Conducted RF Immunity: | EN61000-4-6, 3VRMS, 80% 1KHz AM |
| Power Frequency Magnetic Field Immunity: | EN61000-4-8, 3A/m |
| Voltage Dip Immunity: | EN61000-4-11 |

Enclosure

| | |
|----------|---|
| Housing: | High impact plastic, 94V0 polycarbonate, non-vented Desktop: C6, C7, C14, or C18 inlet |
|----------|---|

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM96600-65VV.V-R2

May 3, 2024

| | |
|------------------------------|--|
| AC Input Mechanical Options: | Hybrid: Desktop inlet or changeable blades for wall-plug-in style, Class I or Class II input |
| Markings: | Label and/or pad printed and/or laser-etched into case |

Special Options

1. Removal of LED (cost reduction or aesthetic purpose)
2. Custom cordsets, various cordage types, and connector types
3. Custom markings
4. Short term output surge capability for motors or other high peak current loads. (Available up to 120W for 1 second at nameplate voltage range. Higher levels possible for limited input voltage range, or larger allowed voltage dip.)
5. Reduced leakage current
6. Tightened output voltage tolerance
7. Reduced output ripple level
8. Reduced output power rating
9. High reliability PCB laminate with plated through-holes for IPC610 Class 2 compliance
10. Low temperature option, down to -40°C
11. Special housing and cordset colors
12. "Back EMF" upgrade, for motor loads and other high inductance applications with reverse energy flow requirements
13. Improved ingress protection (IP) rating

Output Connectors

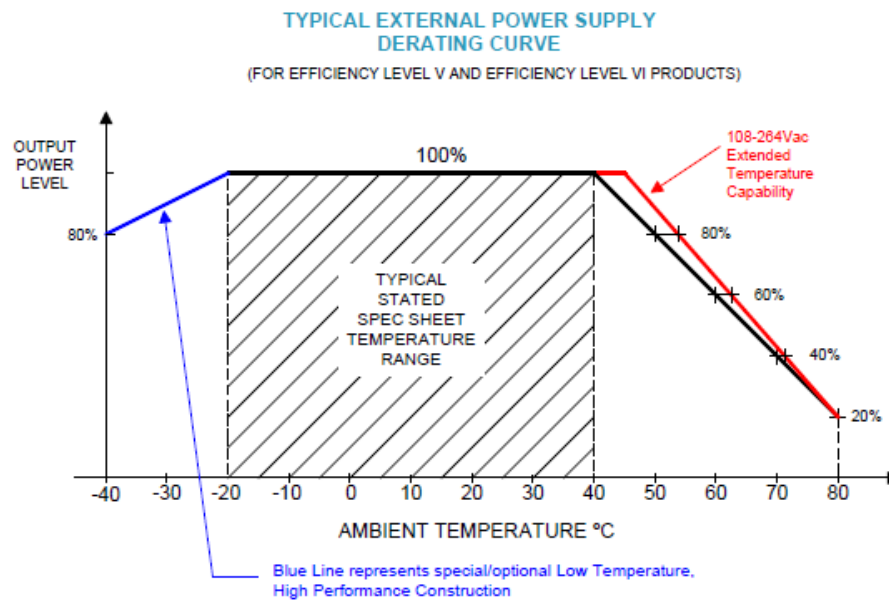
- Several output connector options are available with various output current ratings. GlobTek can supply 10A rated 2.1mm and 2.5mm style DC Power Jacks, to complement our 10A output rated 2.1mm and 2.5mm DC power plugs used on our output cordsets.
- Please visit our real-time listing of mating connector product offering:
<https://en.globtek.com/news/high-current-coaxial-barrel-plug-jacks-for-high-wattage-power-supplies>

Delivering leading edge, innovative power solutions for more than 30 years....

Model: GTM96600-65VV.V-R2

May 3, 2024

DERATING CURVE



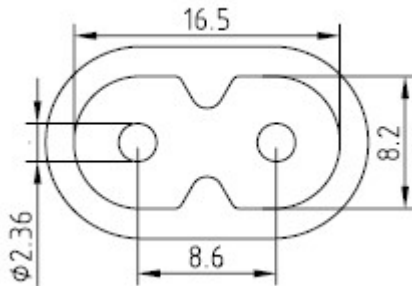
+74C operation with an output power of 19.2W; and cold start at -40C

Model:GTM96600-65VV.V-R2

May 3, 2024

INPUT CONFIGURATION

Description IEC 60320/C8 AC Inlet connector

[Blade Insertion Instructions](#)
[R-Blade Style Instruction Video](#)


Mates with IEC 60320/C8 Plug

This series of Interchangeable Blade products may be used with Proprietary Interchangeable Blades as described below or with standard international power cords.

Optional INPUT BLADES: R-Socket: below are available blades configurations which are "not included" (unless stated above); may be purchased separately, packaged with power supply, or as a separate "R-KIT" if specified

| # Part Number | Main Country/Region | Plug | IECEE Type |
|-----------------------------------|------------------------|--|------------|
| 1 R-NA-2(R) | North America, Japan | Nema 1-15P | Type A |
| 2 R-SAA-2(R) | Australia/New Zealand | AS/NZ 3112 | Type I |
| 3 R-UK-2(R) | United Kingdom/Ireland | UK, Hong Kong, Singapore, Gulf States | Type G |
| 4 R-EU-2(R) | Europe | CEE 7/16 | Type C |
| 5 R-CN-2(R) | China | GB 2099 | Type A |
| 6 461-03030003(R) | N/A | R-DI(R) Desktop Insert for use with a cord | N/A |
| 7 R-KIT-2(R) | prepackaged kit | 1,2,3,4 above | N/A |
| 8 R-KIT-2-INTL(R) | prepackaged kit | 2,3,4 above | N/A |

PROPRIETARY INFORMATION


PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<https://www.globtek.com/ds/oRFuwJ8iAvH/d2ZGoeWyLmd.html>

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM96600-65VV.V-R2


May 3, 2024




UL 2P

P/N: R-NA-2(R)
NORTH AMERICA
JAPAN



AUS 2P

P/N: R-SAA-2(R)
AUSTRALIA



UK 2P

P/N: R-UK-2(R)
UNITED KINGDOM
HONG KONG
SINGAPORE


EU 2P

P/N: R-EU-2(R)
EUROPE
SOUTH AMERICA


CN 2P

P/N: R-CN-2(R)
CHINA


R-DI

P/N: R-DI
DESKTOP INSERT

Standard Cordsets

Below are standard cordsets which are "not included" (unless stated above); these may be purchased separately or packaged with the power supply. Contact your Sales Engineer if the style required is not shown below. Many more available in different lengths, colors or cable material.

[Standard International IEC 320/C7 Cordsets](#)

| Part Number | Country | Plug | Connector | Length (mm) | Length (feet) |
|--|---------------------|-----------|------------|-------------|---------------|
| <u>2094112M703(R)</u> | Argentina (Type I) | IRAM 2063 | IEC 320/C7 | 2000 | 7 |
| <u>5014112M703A(R)</u> | Australian (Type I) | AS 3112 | IEC 320/C7 | 2000 | 7 |

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<https://www.globtek.com/ds/orFuwJ8iAvH/d2ZGoeWyLmd.html>

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM96600-65VV.V-R2

May 3, 2024

| | | | | | |
|----------------------------------|--|------------|------------|------|---|
| 207B4111M8703(R) | Brazil (Type N) | NBR14136 | IEC 320/C7 | 1800 | 6 |
| 4533501M8703(R) | China (Type A) | GB 2099.1 | IEC 320/C7 | 1830 | 6 |
| 2074112M703A(R) | European (Type C) | CEE 7/16 | IEC 320/C7 | 2000 | 7 |
| 2084111M8703(R) | South Africa (Type M) | BS 546 | IEC 320/C7 | 1800 | 6 |
| 2084111M8703B(R) | India (Type D) | ISI:1293 | IEC 320/C7 | 1800 | 6 |
| 2714111M8703A(R) | India (Type C) | ISI:1293 | IEC 320/C7 | 1800 | 6 |
| 451J3401M8703(R) | Japan (Type A) | JIS 8303 | IEC 320/C7 | 1830 | 6 |
| 2044112M703A(R) | Korea (Type C) | KS C8305 | IEC 320/C7 | 2000 | 7 |
| 4511116F703A(R) | N. American (Type A) | NEMA 1-15P | IEC 320/C7 | 1830 | 6 |
| 4033401M8703A(R) | Taiwan (Type A) | CNS690 | IEC 320/C7 | 1830 | 6 |
| 6104112M703A(R) | UK, Hong Kong, Singapore, Gulf States (Type G) | BS1363 | IEC 320/C7 | 2000 | 7 |

Delivering leading edge, innovative power solutions for more than 30 years....

Model: GTM96600-65VV.V-R2

May 3, 2024

OUTPUT CONFIGURATION

Common output connector options:



L Type (Coaxial
5.5x2.5mm plug)



C Type (Coaxial
5.5x2.1mm plug)



K Type (Coaxial
3.5x1.3mm plug)



LL Type (5.5x2.5mm
Locking 760k type)



CL Type (5.5x2.1mm
Locking S761k type)



ML2 Type (Molex
housing 43025-0200)



YL3 Type
(KPPX-3P)



YL4 Type (KPPX-4P)



EJ1/2/3/4/5 (EIAJ
RC-5320A type
connectors)



MSB Type (Micro
USB)



USBC Type (USB
Type C)



Inquire for custom
design

For a comprehensive list of options, [click here](#)







Contact GlobTek for your specific requirements or custom solutions.

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM96600-65VV.V-R2

May 3, 2024

Approvals

| Logo | Description |
|---|---|
|  R37924 RoHS | Taiwan BSMI GTM96600-R2 R37924 GTM96600-6012-R2; http://www.bsmi.gov.tw/wSite/ct?xItem=4072&ctNode=816&mp=2 |
| No Logo Applicable | CB for IEC 60601-1:2005+A1 |
| No Logo Applicable | CB for IEC 62368-1:2014 (Second Edition) |
|  | Test standard: EN 55032:2012+AC:2013 EN 61000-3-2:2014 EN 61000-3-3:2013 EN 55024:2010 EN 60601-1-2:2015 |
|  | CHINA SJ/T 11364-2014, China RoHS Chart: http://www.globtek.com/pdf/F-GT-DJD-8.4.1-006%20China%20RoHS%20Declaration% |
| Conforms to UL STD. 62368-1 Certified to CSA STD C22.2 NO.62368-1 | Conforms to UL STD. 62368-1 Certified to CSA STD C22.2 NO.62368-1 |
|  | |
|  | Declaration ДС № EAЭC N RU Д-US.KA01.B.10453_19 Custom Union of Russia, Belarus, Kazakhstan http://www.globtek.com/redirect/?loc=gost-certificate-eac-declaration |
|  | Medical Electrical Equipment - Part 1: General Requirements For Basic Safety And Essential Performance [AAMI ES60601-1:2005 +A1] |

PROPRIETARY INFORMATION









PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<https://www.globtek.com/ds/oRFuwJ8iAvH/d2ZGoeWyLmd.html>

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM96600-65VV.V-R2

May 3, 2024

| | |
|--|---|
|  | Information Technology Equipment Safety Part 1: General Requirements >Valid without revision:01Jan2022< [UL 60950-1:2007 Ed.2 +R:14Oct2014] |
|  Class 2 Power Unit | Class 2 Power Units [UL 1310:2011 Ed.6 +R:12Dec2014] Power Supplies With Extra-Low Voltage Class 2 Outputs [CSA C22.2 No.223:2015 Ed.3] |
|  | Compliance of this power supply with FCC Part 15, Class B has been demonstrated with output load. The FCC law stipulates that system-level testing is required to demonstrate with the FCC emission limits with the actual system load. |
|  | Indoor Use Only - Mark is on the label or Molded in the case |
| IP40 | Ingress Protection: ?IP40 to IEC60529:2001 Protection against granular foreign bodies |
|  DC-E-G71-010.2 PRECAUCION: PARA USO EN EQUIPOS ELECTRONICOS SOLAMENTE | IRAM certificate GTM96600 GTM91099 T2(A) R2 to IEC 62368-1:2014 |
|  GlobTek, Inc. | JAPAN TUV R-PSE, Cert. No. JD 50313287, to J60950-1(H26) , J55022(H22),J3000(H25)[DC15?30V]. Please reference the following website for guide regulations: https://www.globtek.com/r2/Szj4Vb |
|  GlobTek, Inc. | JAPAN TUV R-PSE, Cert. No. JD 50313287, to J60950-1(H26) , J55022(H22),J3000(H25)[DC30?60V]. Please reference the following website for guide regulations: https://www.globtek.com/r2/Szj4Vb |
|  GlobTek, Inc. | JAPAN TUV R-PSE, Cert. No. JD 50469658, to J62368-1(H30) , J55032(H29),J3000(H less). Please reference the following website for guidelines on PSE regulations: https://www.globtek.com/r2/Szj4Vb |
| | Korea or GTM96600-6x19-T2 ,R2) 19V |

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<https://www.globtek.com/ds/oRFuwJ8iAvH/d2ZGoeWyLmd.html>

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM96600-65VV.V-R2

May 3, 2024

| | |
|---|---|
|  <p>직류전원장치 AC/DC ADAPTER KTC HU10499-19039A 전기용품안전관리법에 의한 표시 최저소비효율기준 만족 제품 모델명: GTM96600-6554-T2, R2 Mfr. Name: GLOBTEK (SUZHOU) CO.,LTD A/S Center:10-6221-6100</p> | Korea HU10499-19039A (for GTM96600-6x48-T2,R2(41V-54V)) |
|  <p>직류전원장치 AC/DC ADAPTER KTC HU10499-20044A R-R-GSZ-0008 전기용품안전관리법에 의한 표시 최저소비효율기준 만족 제품 모델명: GTM96600-6012-R2 Mfr. Name: GLOBTEK (SUZHOU) CO.,LTD A/S Center:10-6221-6100</p> | Korea HU10499-20044A (for GTM96600-6x12-T2(A),R2 9-15V) |
| EFFICIENCY LEVEL  | Efficiency: complies to section 301 of Energy Independence and Security Act (EISA) co Energy Star tier 2 (North America), ECP tier 2 (China), MEPS tier 2 (Australia), Code of (Europe) |
|  | Morocco SDoC declaration http://www.globtek.info/certs/Morocco%20SDoC%20Declaration/ |
| RoHS | Specifications of directive 2011/65/EU Annex VI (ROHS-2) with amendment 2015/863-E http://www.ce-mark.com/Rohs%20final.pdf |
|  RoHS Symbol Serial NO. YEAR WEEK Class NO for production | Serial Number Information |
|  | UKCA Certification |
|  10276 | Ukraine UKRSepr (Document: www.globtek.com/html/iso_certificates/GT_Ukraine.pdf) |
| | |

PROPRIETARY INFORMATION



PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<https://www.globtek.com/ds/orFuwJ8iAvH/d2ZGoeWyLmd.html>

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GTM96600-65VV.V-R2

May 3, 2024

| | |
|---|--|
| <p>DO NOT REMOVE THE TAG WARNING/ADVERTISEMENT RISK OF ELECTRIC SHOCK DRY LOCATION USE ONLY FOR INDOOR USE ONLY Risque de choc électrique Utilisation endroit sec Pour une utilisation en intérieur See instructions if the input plug does not fit the power outlet</p> | <p>UL1310 Warning Label Up To 36 Volts with plugs</p> |
|  | <p>Japan: Voluntary Control Council for Interference (VCCI)</p> |
|  | <p>WEEE: Complies with EU 2012/19/EU (http://ec.europa.eu/environment/waste/wEEE/inf) Mark is on the label or Molded in the case</p> |