

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTDP61200-120VV

May 2, 2024

GTDP61200-120VV

Information

Model Number	GTDP61200-120VV
Description	GTDP61200-120VV, ICT/ITE Power Supply, Desktop/External, DC-DC, , Input Rating: 12-32 VDC, Male Cigarette Lighter Plug for GTDP61200-120VV, Output Rating: 120 Watts, Power rating with convection cooling (W) , 12-24V in 0.1V increments, Approvals: EAC; UL 60601-1 (pending); UL 2089 (pending); CB 60601-1; CE; RoHS; WEEE; China RoHS; VCCI;
Model Picture	
Agency Documents	https://www.globtek.info/certs/GTDP61200/
CE EC-Declaration	https://www.globtek.com/pdf/ec_declaration/a0Oa000000OJbbMEAT
RoHS/RoHS2 Declaration	https://www.globtek.com/pdf/rohs_cert/a0Oa000000OJbbMEAT
REACH Declaration	https://www.globtek.com/pdf/iso_certificates/REACH.pdf
Conflict Minerals Declaration	https://www.globtek.com/pdf/conflict-minerals.pdf

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GTDP61200-120VV

May 2, 2024

MODEL PARAMETERS

Type	Desktop/External
Technology	DC-DC
Category	ICT/ITE Power Supply
Input Voltage	12-32 VDC
I/P Amps (A)	0 - 15A
Wattage (W)	120.0
Vout Range (V)	12-24
Efficiency Level	USA DOE Level VI / Eco-design Directive 2009/125/EC, (EU) 2019/1782
Ingress Protection	
Size (mm)	134(L)*54(W)*30.5(H)

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.


<https://www.globtek.com/ds/fP7whMGb2qq/QD4TamWcX3M.html>

Delivering leading edge, innovative power solutions for more than 30 years....

Model: GTDP61200-120VV

May 2, 2024

ENCLOSURE

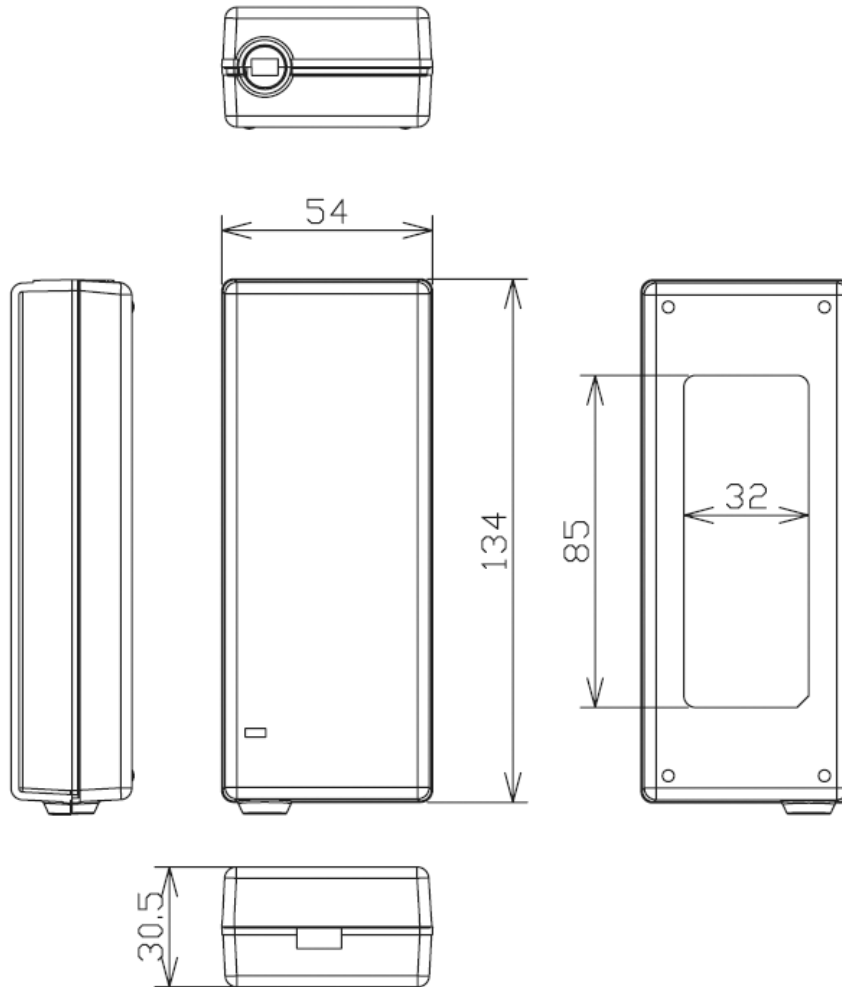

Delivering leading edge, innovative power solutions for more than **30** years....

Model: GTDP61200-120VV

May 2, 2024

RATING TABLE

Model Number	Voltage	Amps(A)	Watts(W)	RFQ
GTD61200-12024	24 V	5	120.00	RFQ

Model:GTDP61200-120VV

May 2, 2024

SPECIFICATIONS

A) ELECTRICAL SPECIFICATIONS:

01. Input Voltage: 12~32Vdc
02. Input current: Maximum 15A
03. Output Current(Max.): 5.0A
04. Output Power(Max.): 120W
05. Output Ripple & Noise : 240mV max
06. Efficiency: ≥85%

B) PROTECTION

01. Over voltage protection: autorecovery
02. Limit current protection: Optional
03. Short-circuit protection: autorecovery

C) SAFETY & EMC

01. CE, LVD
02. MET IEC60601 test report

D) OTHER:

01. MTBF: 200,000 Hours @ 25°C ambient temperature
02. Operating Temperature: 0°C to 40°C ambient temperature
03. Humidity: 0% to 90% relative humidity
04. Storage Temperature: -20°C to 85°C
05. Cooling: Convection
06. RoHS 2: Complies with EU 2011/65/EU China SJ/T 11363-2006

E) ENCLOSURE

01. Housing: High impact plastic, 94V0 polycarbonate, non-vented
02. Size: 134*54*30.5 mm +/-1.0 mm
03. Markings: Label and/or Pad Printed and/or Molded in the case

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GTDP61200-120VV

May 2, 2024

DERATING CURVE


N/A


Delivering leading edge, innovative power solutions for more than 30 years....

Model: GTDP61200-120VV

May 2, 2024

INPUT CONFIGURATION

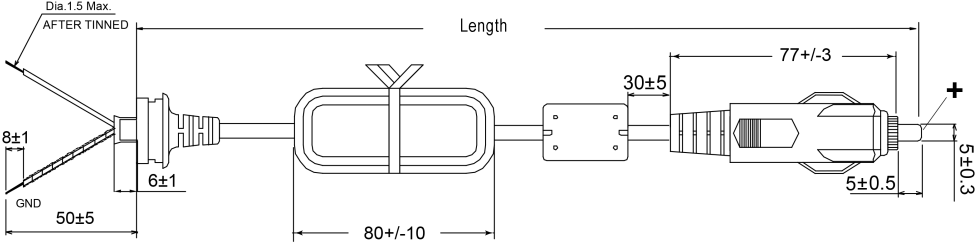Description	Male Cigarette Lighter Plug for GTDP61200-120VV
	

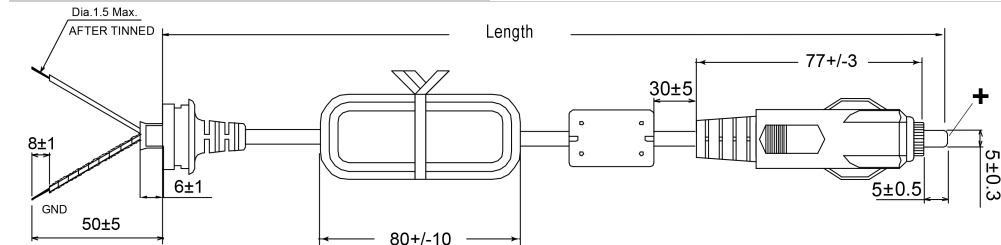

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<https://www.globtek.com/ds/fP7whMGb2qq/QD4TamWcX3M.html>

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTDP61200-120VV

May 2, 2024

OUTPUT CONFIGURATION

Common output connector options:



L Type (Coaxial
5.5x2.5mm plug)



C Type (Coaxial
5.5x2.1mm plug)



K Type (Coaxial
3.5x1.3mm plug)



LL Type (5.5x2.5mm
Locking 760k type)



CL Type (5.5x2.1mm
Locking S761k type)



ML2 Type (Molex
housing 43025-0200)



YL3 Type
(KPPX-3P)



YL4 Type (KPPX-4P)



EJ1/2/3/4/5 (EIAJ
RC-5320A type
connectors)



MSB Type (Micro
USB)



USBC Type (USB
Type C)



Inquire for custom
design

For a comprehensive list of options, [click here](#)

Contact GlobTek for your specific requirements or custom solutions.

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTDP61200-120VV

May 2, 2024

Approvals

Logo	Description
	Attention Mark / Refer to operating manual for operating and service instructions
No Logo Applicable	EN 60601-1: 2005 + CORR. 1 (2006) + CORR. 2 (2007)
	Test standard: EN 60601-1: 2005 + CORR. 1 (2006) + CORR. 2 (2007)
	CHINA SJ/T 11364-2014, China RoHS Chart: http://www.globtek.com/pdf/F-GT-DJD-8.4.1-006%20China%20RoHS%20Declaration%205-20-22.pdf
	Declaration ДС № EAЭC N RU Д-US.KA01.B.10453_19 Custom Union of Russia, Belarus and Kazakhstan http://www.globtek.com/redirect/?loc=gost-certificate-eac-declaration
	Indoor Use Only - Mark is on the label or Molded in the case
RoHS	Specifications of directive 2011/65/EU Annex VI (ROHS-2) with amendment 2015/863-EU (ROHS-3) http://www.ce-mark.com/Rohs%20final.pdf
No Logo Applicable	UL 2089 for GTDP61200 (pending)
No Logo Applicable	UL 60601 for GTDP61200
	Japan: Voluntary Control Council for Interference (VCCI)
	WEEE: Complies with EU 2012/19/EU (http://ec.europa.eu/environment/waste/weee/index_en.htm) Mark is on the label or Molded in the case