


**PROPRIETARY INFORMATION:**  
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION		DATE	APPROVED
REV	DESCRIPTION		
A	INITIAL RELEASE, RFS.19245, BS	08/11/10	HM
B	UPDATE PLUG ARTWORK AND ENEC/VE APPROVALS FOR CONNECTOR, RFS.23872, BS	12/06/12	HM

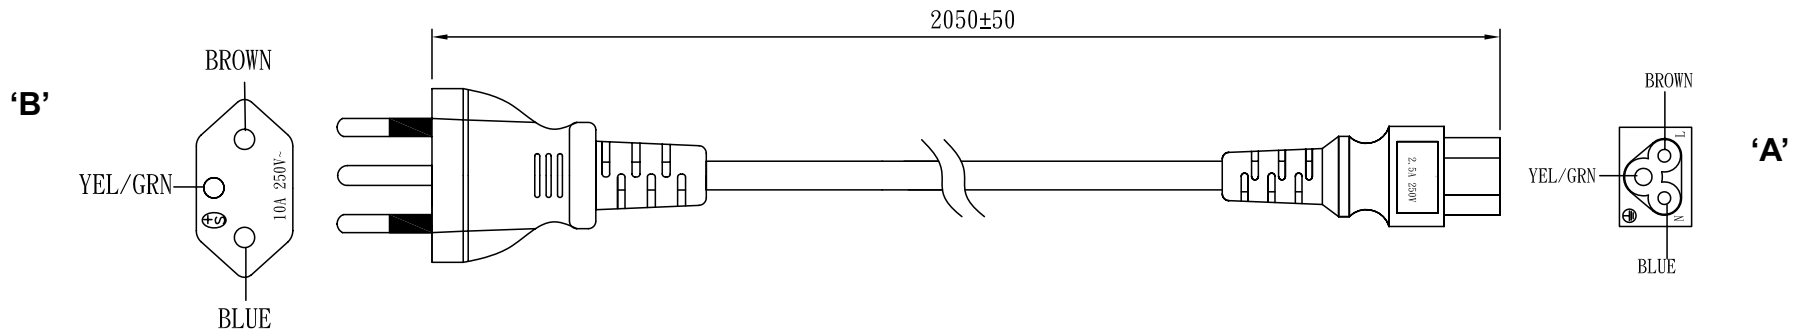


**GENERAL SPECIFICATIONS:**

RATING: 2.5A / 250 V AC  
 CABLE TYPE / SIZE: H05VV-F, 3 X 0.75 mm<sup>2</sup>  
 TEMPERATURE RATING: 70° C  
 CABLE JACKET COLOR: BLACK  
 OVERALL LENGTH (L): 2050 ± 50 mm  
 CABLE OUTER DIAMETER: 6.7 ± 0.2 mm  
 END 'A' TERMINATION: IEC 320/C5  
 END 'B' TERMINATION: SWISS TYPE ACCORDING TO SEV 1011  
 APPROVALS PLUG: SEV  
 APPROVALS CONNECTOR: SEV

**PACKING:**

HANKING  
 L = 200 ± 20 mm

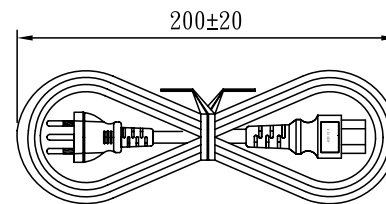

**NOTES:**

- CONTINUITY TEST REQUIRED FOR E-E,L-L,N-N.
- HIPOT TEST AT 1200 VAC FOR 1 SECOND REQUIRED BETWEEN EACH CONDUCTOR (9L-N,L-E,N-E).
- STRAIN RELIEF PULL TEST BOTH ENDS AT 22 LBS (100N) FOR 5 SECONDS. CABLE MUST NOT DISPLACE MORE THAN 1 mm.
- PLUG MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S):



5. CONNECTOR MUST BE MARKED WITH SYMBOLS:



DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
<b>TABULATION BLOCK</b>				
			<b>GlobTek, Inc.</b> www.globtek.com 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111	
				DWG TITLE: SWISS DETACHABLE CORDSET
INIT.BY: BS	DATE: 08/11/10	TOLERANCES: DECIMALS ANGULAR .xx +/- 0.1 +/- 1° .xxx +/- .005		
DRAWN: NF	DATE: 08/11/10	MILLIMETERS ANGULAR .xx +/- 0.3 +/- 1° .xxx +/- .013		
APRVD: BS	DATE: 08/11/10	FSCN No.: G, CC	SIZE A	REV. B
		SCALE: NONE	PART NO: 23214262M0712(R)	SHEET 1/1

**Foot Note:**  
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

**Limitation of Use:**  
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice