


**PROPRIETARY INFORMATION:**  
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING IN WHOLE OR IN PART IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION		DATE	APPROVED
REV	DESCRIPTION		
A	INITIAL RELEASE	07/02/03	BS
B	UPDATE PLUG, RFS.2470, GC	11/05/03	BS
C	ADD CCC TO CONNECTOR, RFS.2774, DMR	01/02/04	BS

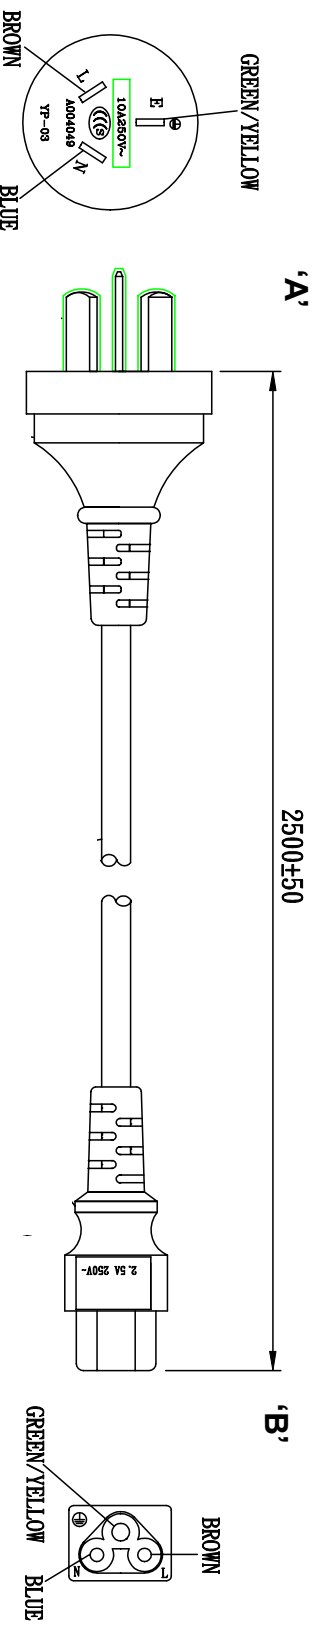

**GENERAL SPECIFICATIONS:**

- RATING: 2.5A / 250V
- CABLE TYPE / SIZE: RVV, 3 x 0.75 mm<sup>2</sup>
- TEMPERATURE RATING: 60° C
- CONDUCTOR COLORS: BROWN / BLUE / GREEN-YELLOW
- CABLE JACKET COLOR: BLACK
- OVERALL LENGTH (L): 2500 ± 20 mm ( 8 Ft.2 IN )
- CABLE OUTER DIAMETER: 6.0 ± 0.2 mm
- END 'A' TERMINATION: CHINA PLUG, CCC GR2099
- END 'B' TERMINATION: IEC 320/C5
- APPROVALS PLUG: CCC
- APPROVALS CABLE: CCC
- APPROVALS CONNECTOR: CCC

**NOTES:**

1. CORD AND PLUG MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).



Foot Note:  
 Globtek Inc. will not be liable for the safety and performance of these power supplies if unauthorized access and repair occurs. End user should consult applicable UL, CSA or EN standards for proper installation instructions.

DASH NO.	PART NO.	REV.	DESCRIPTION	NOTES
<b>TABULATION BLOCK</b>				

REV.	C					TOLERANCES:	SIZE
REV	C					DECIMALS	ANGULAR
SHEET	1					.xx +/- .01	+/- °
						.xxx +/- .005	
INTTBY:	BS	DATE:	07/02/03	MILLIMETERS	ANGULAR	.xx +/- .03	+/- °
						.xxx +/- .013	

DRAWN: NF	DATE: 07/02/03	FSCN No.: G, T	SCALE: NONE	PART NO: 6023592M15712	REV: C
-----------	----------------	----------------	-------------	------------------------	--------

APRVD:	DATE: 07/02/03	SCALE: NONE	PART NO: 6023592M15712	SHEET 1/1
--------	----------------	-------------	------------------------	-----------

**GlobTek, Inc.**  
 www.globtek.com  
 186 Veterans Dr. Northvale, NJ 07647  
 Tel. 201-784-1000 Fax 201-784-0111

DWG TITLE: CHINA TYPE DETACHABLE CORDSET