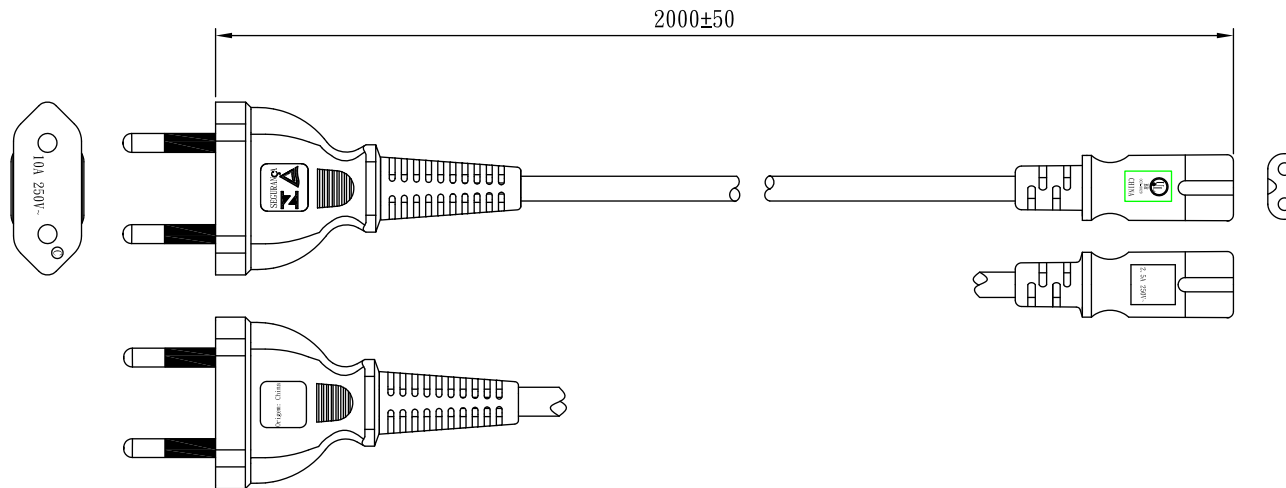


PROPRIETARY INFORMATION:

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION


REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE, RFS. 22803, BS	04/16/12	BS
B	UPDATE CABLE TYPE FROM H05VV-F TO H03VVH2-F, RFS.26717, SV	03/31/17	BS
C	UPDATE CABLE DRAWING, RFS.26735, NF	4/13/17	BS

'B'

GENERAL SPECIFICATIONS:

RATING: 2.5A / 250 V AC
CABLE TYPE / SIZE: H03VVH2-F, 2 X 0.75 mm²
TEMPERATURE RATING: 70°C
CABLE JACKET COLOR: BLACK
OVERALL LENGTH (L): 2000 ± 50 mm
CABLE OUTER DIAMETER: 6.5 ± 0.1 mm
END 'A' TERMINATION: IEC 320/C7
END 'B' TERMINATION: BRAZILIAN PLUG, 2 PIN WITHOUT GROUND
APPROVALS PLUG: INMETRO
APPROVALS CONNECTOR: UL BR

PACKING:

HANKING
L = 200 ± 20 mm


NOTES:

1. CORD AND PLUG MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).

RELEASED
By N.Frost at 1:17 pm, Apr 13, 2017


DASH NO.	PART NO	REV.	DESCRIPTION		NOTES
TABULATION BLOCK					
		TOLERANCES: DECIMALS .xx +/- 0.1 .005 MILLIMETERS .xx +/- 0.3 .013		 GlobTek, Inc. www.globtek.com 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111	
		ANGULAR +/- 1°			
INIT.BY: BS	DATE: 04/16/12	ANGULAR +/- 1°			DWG TITLE: BRAZILIAN DETACHABLE CORDSET, 2 x 0.75 mm ²
DRAWN: NF	DATE: 04/16/12	FSCN No.: G, CC	SIZE A	REV. C	
APRVD: HM	DATE: 04/16/12	SCALE: NONE		PART NO: 204B4222M703(R)	SHEET 1/1

Foot Note:
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

Limitation of Use:
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice