


PROPRIETARY INFORMATION:
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR
 USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY
 PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	03/21/00	BS
B	ADD ROHS, RFS.14727, EM	10/02/08	BS

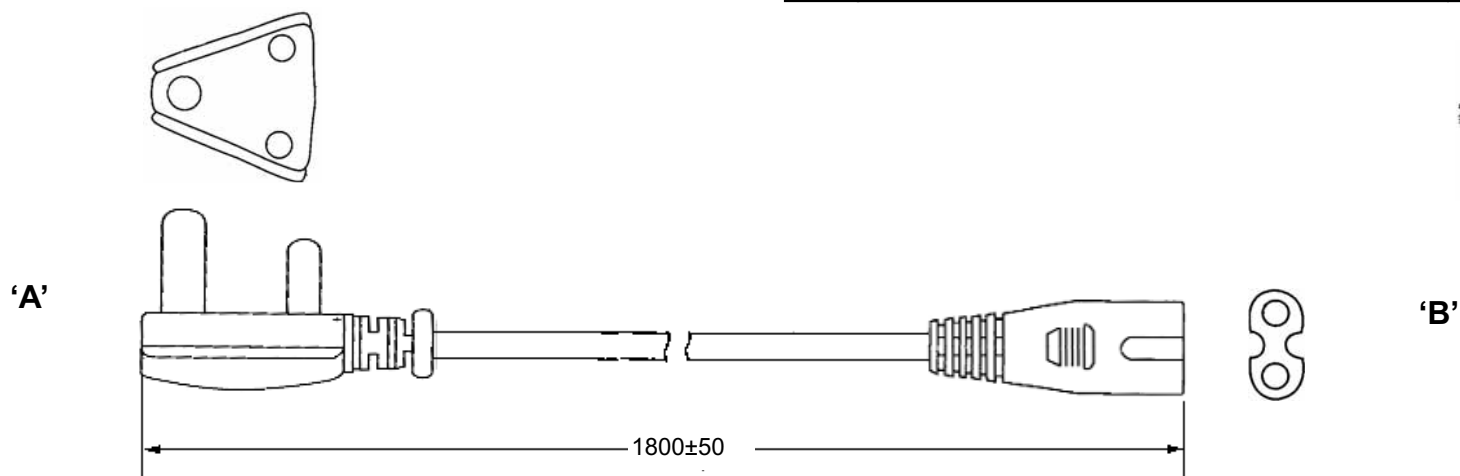

GENERAL SPECIFICATIONS:

RATING: 2.5A / 250V AC
 CABLE TYPE / SIZE: H03VVH2-F, 2 x 0.75 mm²
 TEMPERATURE RATING: 75° C
 CABLE JACKET COLOR: BLACK
 OVERALL LENGTH (L): 1800 ± 50 mm
 CABLE OUTER DIAMETER: 6.0 ± 0.1 mm
 END 'A' PLUG: BS 546
 END 'B': IEC-320 / C7
 APPROVALS CABLE: <HAR>

PACKING:

BULK

DASH NO.	PART NO	REV.	DESCRIPTION		NOTES
TABULATION BLOCK					
		TOLERANCES:		 GlobTek®, Inc. www.globtek.com	186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111
		DECIMALS	ANGULAR		
		.xx +/- 0.1 .xxx +/- .005	+/- 1°		
INIT.BY: EM	DATE: 03/21/00	MILLIMETERS	ANGULAR	DWG TITLE: INTERNATIONAL DETACHABLE CORDSET	
		.xx +/- 0.3 .xxx +/- .013	+/- 1°		
DRAWN: NF	DATE: 03/21/00	FSCN No.: G, CC	SIZE A	REV. B	
APRVD: DMR	DATE: 03/21/00	SCALE: NONE		PART NO: 2084111M8703(R)	SHEET 1/1

Foot Note:
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

Limitation of Use:
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice