


PROPRIETARY INFORMATION:
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE, RFS.2679, DMR	12/12/03	DMR
B	CHANGE PACKING TO LOOSE HANK, UPDATE DWG, RFS.2775, DMR	01/02/04	DMR
C	REVISE T-MARK TO PSE, RFS. 8628, DMR	06/08/06	BS
D	ADD ROHS PREFIX TO P/N, RFS. 22717, BS	04/02/12	BS

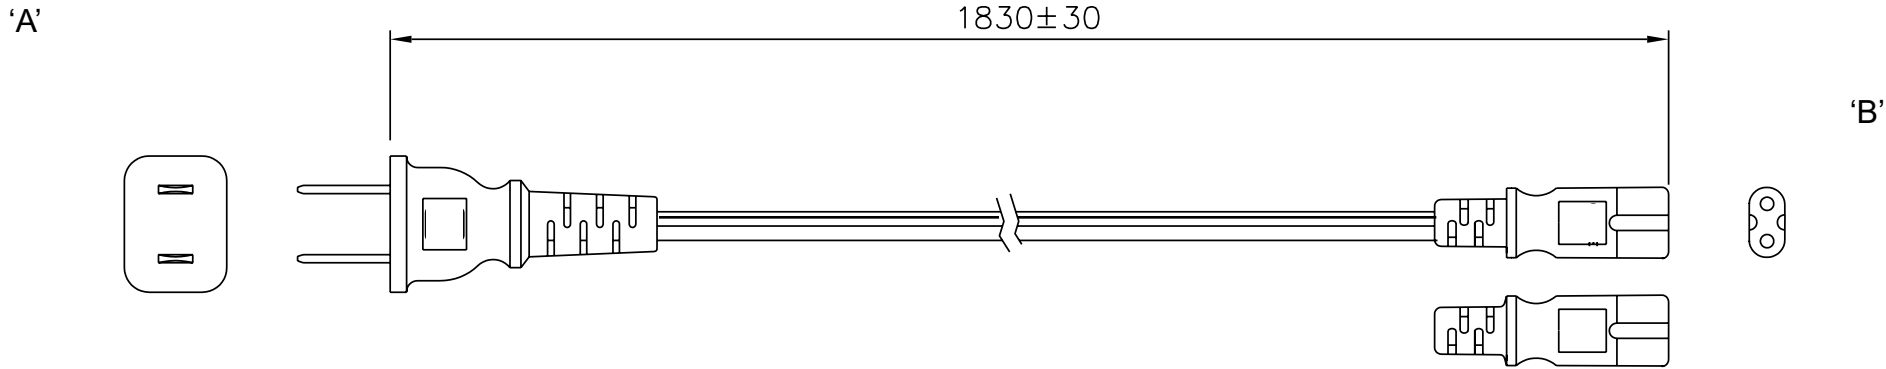


GENERAL SPECIFICATIONS:

RATING: 7A / 125V AC
 CABLE TYPE / SIZE: VFF, 2 x 0.75 mm²
 TEMPERATURE RATING: 60° C

CABLE JACKET COLOR: BLACK
 OVERALL LENGTH (L): 1830 ± 30 mm
 CABLE OUTER DIAMETER: 3.4 x 6.9 ± 0.2 mm
 END 'A' TERMINATION: JIS 8303
 END 'B' TERMINATION: IEC 320 /C7
 APPROVALS PLUG: PSE
 APPROVALS CABLE: PSE
 APPROVALS CONNECTOR: PSE


PACKING:
 LOOSE HANK:

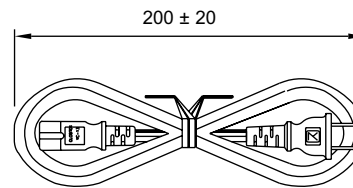

NOTES:

1. CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).



DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
TABULATION BLOCK				
		TOLERANCES: DECIMALS ANGULAR .xx +/- 0.1 +/- 1° .xxx +/- .005		 GlobTek, Inc. www.globtek.com 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111
		MILLIMETERS ANGULAR .xx +/- 0.3 +/- 1° .xxx +/- .013		
INIT.BY:DMR	DATE:	DWG TITLE: JAPAN DETACHABLE CORDSET		
	12/12/03	FSCN No.:	SIZE	REV.
DRAWN: NF	DATE:	G, CC, YL	A	D
APRVD: DMR	DATE:	SCALE: NONE	PART NO: 451J3401M8703(R)	SHEET 1/1
	12/12/03			

Foot Note:
 Globtek Inc. will not be liable for the safety and performance of these power supplies if unauthorized access and repair occurs. End user should consult for the proper installation instruction the applicable UL, CSA and EN standards.

Limitation of Use:
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice