

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTD9X1002-WWWVV-TW

May 10, 2025

Automotive / Aerospace / Medical Grade Rated Vehicle Adapter / Charger 120 Watts Peak

Information

Model Number	GTD9X1002-WWWVV-TW
Description	GTD9X1002-WWWVV-TW, ICT / ITE / Medical Power Supply/Class 2/Household Power Supply, 60601-1-4th Ed. , Desktop/External, DC-DC, , Input Rating: 12-36V, Lead Wire, see Blades/Cord Included for description, Output Rating: 100 Watts, Power rating with convection cooling (W) , 12-54V in 0.1V increments, Approvals: China RoHS; Double Insulation; PSE; RoHS; Ukraine; VCCI; WEEE; UKCA;

Model Picture



Agency Documents

CE EC-Declaration	https://www.globtek.com/pdf/ec_declaration/a0O0c00000QD1HqEAL
RoHS/RoHS2 Declaration	https://www.globtek.com/pdf/rohs_cert/a0O0c00000QD1HqEAL
REACH Declaration	https://www.globtek.com/pdf/iso_certificates/REACH.pdf
Conflict Minerals Declaration	https://www.globtek.com/pdf/conflict-minerals.pdf

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GTD9X1002-WWWVV-TW

May 10, 2025

MODEL PARAMETERS

Type	Desktop/External
Technology	DC-DC
Category	ICT / ITE / Medical Power Supply/Class 2/Household Power Supply
Input Voltage	12-36V
I/P Amps (A)	12.0A
Wattage (W)	100.0
Vout Range (V)	12-54
Efficiency Level	
Ingress Protection	IP43
Size (mm)	149.4 x 62.6 x 33.5

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.


<https://www.globtek.com/ds/KerLdPSaTER/mBF9wZa2CWe.html#datasheet>

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTD9X1002-WWWVV-TW

May 10, 2025

ENCLOSURE

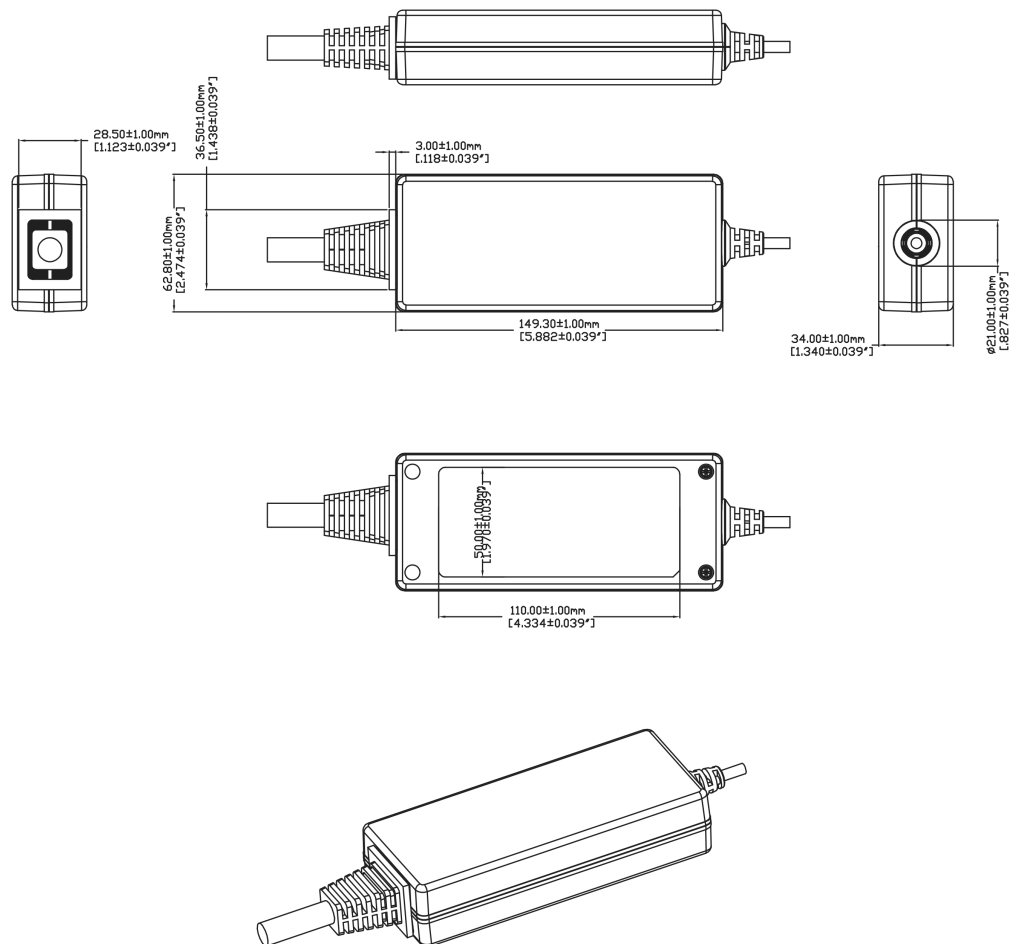

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTD9X1002-WWWVV-TW

May 10, 2025

RATING TABLE

Model Number	Voltage	Amps(A)	Watts(W)	RFQ
GTD9X1002-10012-TW	12 V	8.33	99.96	RFQ
GTD9X1002-6015-TW	15 V	4	60.00	RFQ
GTD9X1002-10015-TW	15 V	6.666	99.99	RFQ
GTD9X1002-10018-TW	18 V	5.55	99.90	RFQ
GTD9X1002-10019-TW	19 V	5.263	100.00	RFQ
GTD9X1002-10022-TW	22 V	4.545	99.99	RFQ
GTD9X1002-10024-TW	24 V	4.16	99.84	RFQ
GTD9X1002-10028-TW	28 V	3.571	99.99	RFQ
GTD9X1002-10030-TW	48 V	3.33	99.90	RFQ
GTD9X1002-10036-TW	36 V	2.77	99.72	RFQ
GTD9X1002-10048-TW	48 V	2.08	99.84	RFQ
GTD9X1002-10054-TW	36 V	1.85	99.90	RFQ

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<https://www.globtek.com/ds/KerLdPSaTER/mBF9wZa2CWe.html#datasheet>

Model:GTD9X1002-WWWVV-TW

May 10, 2025

SPECIFICATIONS

Features

- 2 x MOPP medical isolation
- Aerospace qualified per RTCA/DO-160G, EMS-ready per IEC60601-1-12
- Wide "universal" DC input range
- Enhanced transient and automotive/aerospace surge handling capability
- Shock & vibration in accordance with IEC60601-1-12 (EMS) & DO-160G

Input

Input Voltage Range:	12 - 36VDC (nameplate, nominal)
	10.2 - 39.6VDC (rated, -15% / +10%)
Plus short-term capability between 9.0 - 10.2V. (Duration is limited by temperature rise.)	
Input Current:	9.5A (typ.) @ 12VDC / 100W
	12.0A (max.) @ 10.2VDC / 100W
	17.5A (max.) @ 9.0VDC / 120W
No Load Input Power:	< 0.5W
Efficiency:	87% @ 12VDC, 90% @ 24VDC typ., at "typical" 60W usage scenario
Inrush Current:	< 1.5A @ 14VDC, satisfies DO-160G, Section 16.7.5.2

Output

Turn-on Delay:	< 2 seconds
Output Regulation	+1.5% / -4% max. (measured at the output connector)
Line Regulation:	± 0.1 % typ. (measured at the output connector)
Ripple:	1% max. (using a 10µF low-ESR electrolytic cap + 0.1µF ceramic cap, measured @ 20MHz BW, at the output connector)
Transient Response (Step Load):	10% max. deviation, 2ms max. recovery time (with 100W load step)
Transient Response (Load Dump):	5% max. deviation, 100ms max. recovery time (with 100W load dump)

Protections

Input Protection:	Input line fusing (high-breaking capacity)
	Reverse polarity protection (up to -36VDC)
Input Over-Voltage Protection:	"Ride-through" input over-voltage protection without interruption of output voltage for high-energy surges up to 85VDC (See 'Maximum Allowable Surge Duration' plot for details. See 'EMC' section for other conditions.)
	Output cycles on/off IF ($50V < V_{in} < 85V$) AND IF (surge duration is outside the SOA

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTD9X1002-WWWVV-TW

May 10, 2025

	region in the "Maximum Allowable Surge Duration" plot), 1.5s (typ.) delay between restart attempts
Input Under-Voltage Protection:	Shut down @ 7.4V (typ.), Restore @ 9.0V (max.)
Output Over-Voltage Protection:	110 - 130%, Latching, cycle DC input voltage to reset
Output Over-Current Protection:	110 - 150%, Auto-recovery
Output Short-Circuit Protection:	Auto-recovery
Over-Temperature Protection:	Auto-recovery

Environmental

MTBF:	> 1,500,000 hours @ 25°C ambient (Telcordia SR-332, Issue 3) > 750,000 hours @ 50°C ambient (Telcordia SR-332, Issue 3)
Operating Temperature:	-10°C to 40°C (100W) Check derating curve for T > 40°C.
Storage Temperature:	-40°C to 80°C
Humidity:	0% to 95% relative humidity, non-condensing
Altitude	5000m
Cooling:	Natural convection
Shock:	End use handling: Half-sine, <3ms duration, 1.65m/s, 3 shocks per face Transportation simulation: Trapezoid, 60G acceleration, 5.75m/sec, 3 shocks per face General shock: Half-sine, 100G acceleration, 6ms duration, 3 shocks per face
Vibration:	IEC60601-1-12, Section 10.1.3, Clause B DO-160G, Section 8, Procedure 8.8, Category U, Zone 1A
Bump:	EN1789, Clause 6.4.1
Drop:	EN1789, Clause 6.4.2
Ingress Protection:	IP43
RoHS:	Complies with EU 2015/863 and China SJ/T 11363-2006

Safety

Compliant Standards:	General medical: IEC60601-1 Emergency medical services (EMS): IEC60601-1-12 Information & communications technologies (ICT): IEC62368-1
Dielectric Withstand Voltage (Hi-Pot):	4300VDC from input to output, 1 minute 4300VDC from input to case, 1 minute 500VAC from output to case, 1 minute
Output Leakage Current:	NC: 8µA max. SFC: 40µA max.
Means of Protection (Primary-to-Secondary):	2 x MOPP
Protection Class:	Class II (reinforced insulation)

EMC

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<https://www.globtek.com/ds/KerLdPSaTER/mBF9wZa2CWe.html#datasheet>

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTD9X1002-WWWVV-TW


May 10, 2025

Compliant Standards:	Medical: IEC60601-1-2 Airborne Equipment: RTCA DO-160G Aftermarket automotive: EN50498
Conducted Emissions:	CISPR25, Class 3 DO-160G, Section 21.4, Category M (measured with resistive load)
Radiated Emissions:	CISPR25, Class 3 DO-160G, Section 21.5, Category M EN50498 (measured with resistive load)
Electrical Transient Conduction Along Supply Lines:	ISO7637-2 (Test conditions for 12V nom. / 24V nom. systems, respectively) Test Pulse 1: - 100V / -600V (5,000 pulses) Test Pulse 2a: + 50V / + 50V (5,000 pulses) Test Pulse 2b: + 10V / + 20V (10 pulses) Test Pulse 3a: -150V / - 200V (1 hour) Test Pulse 3b: +100V / + 200V (1 hour) Test Pulse 4: -6V / -12V (1 pulse) ISO16750-2 Load Dump: 12V nom. system: Test Pulse A : $U_s = 87V$, $R_i = 2\Omega$, $t_d = 400ms$ 24V nom. system: Test Pulse B: $U_s^* = 65V$, $R_i = 2\Omega$, $t_d = 350ms$
Input Voltage Interruptions, Dips, Surges and Spikes (DO-160G):	DO-160G, Section 16.6.1.3, Category Z (Momentary interruption) DO-160G, Section 16.6.1.4, Category Z (Normal surge) DO-160G, Section 16.6.2.4, Category Z (Abnormal surge) DO-160G, Section 17, Category B (Spikes)
Electrostatic Discharge (ESD) Immunity:	EN61000-4-2, 10KV contact discharge, 18KV air discharge, Criterion A
Radiated RF Immunity:	EN61000-4-3, 20V/m @ 80MHz - 2.7GHz, 80% 1KHz AM, 80% 5Hz AM, Criterion A DO-160G, Section 20.5, Category R
Conducted RF Immunity:	EN61000-4-6, 3VRMS & 6VRMS (ISM & Amateur bands), 80% 1KHz AM, Criterion A DO-160G, Section 20.4, Category R
Enclosure	
Housing:	High impact plastic, 94V0 polycarbonate, non-vented
Markings:	Adhesive backed label or laser engraving

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTD9X1002-WWWVV-TW

May 10, 2025

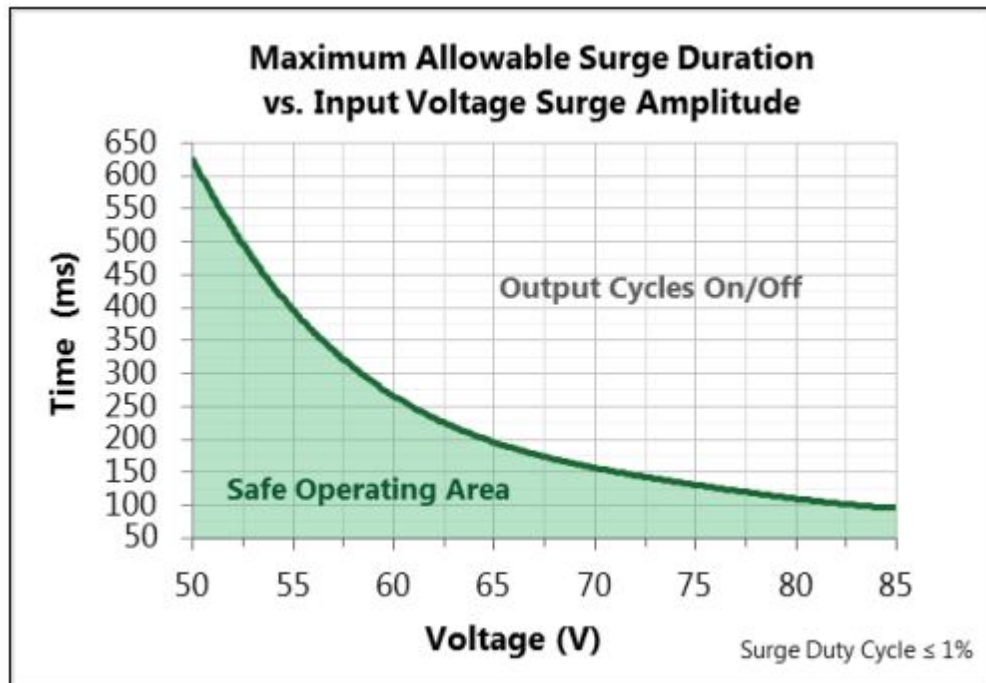


Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTD9X1002-WWWVV-TW

May 10, 2025

DERATING CURVE

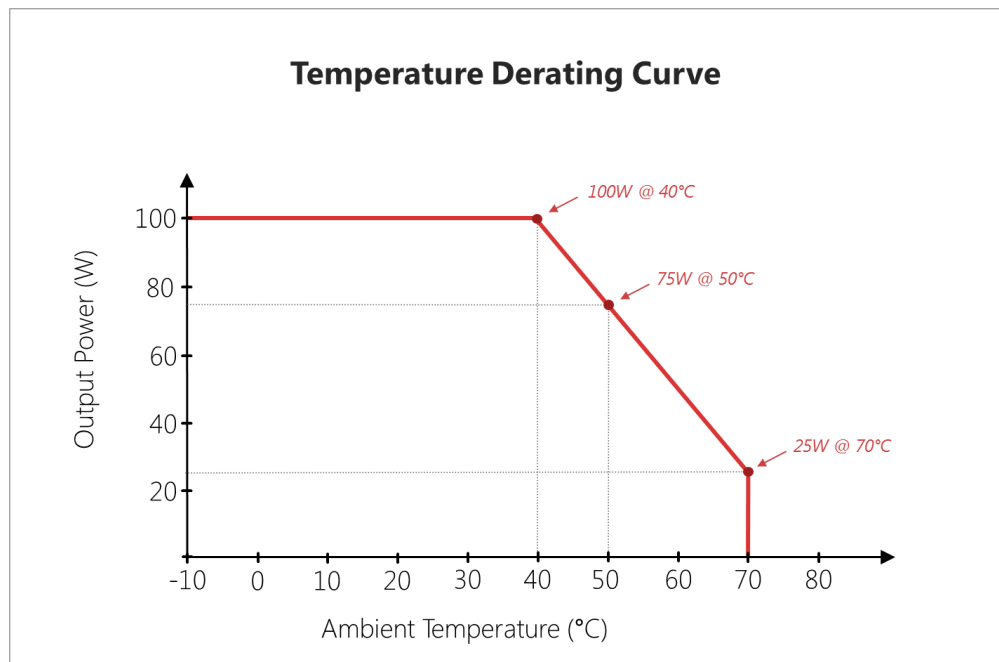

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GTD9X1002-WWWVV-TW

May 10, 2025

INPUT CONFIGURATION

Description	Lead Wire, see Blades/Cord Included for description
	



Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTD9X1002-WWWVV-TW

May 10, 2025

OUTPUT CONFIGURATION

Common output connector options:



L Type (Coaxial
5.5x2.5mm plug)



C Type (Coaxial
5.5x2.1mm plug)



K Type (Coaxial
3.5x1.3mm plug)



LL Type (5.5x2.5mm
Locking 760k type)



CL Type (5.5x2.1mm
Locking S761k type)



ML2 Type (Molex
housing 43025-0200)



YL3 Type
(KPPX-3P)



YL4 Type (KPPX-4P)



EJ1/2/3/4/5 (EIAJ
RC-5320A type
connectors)



MSB Type (Micro
USB)



USBC Type (USB
Type C)



Inquire for custom
design

For a comprehensive list of options, [click here](#)

Contact GlobTek for your specific requirements or custom solutions.

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTD9X1002-WWWVV-TW

May 10, 2025

Approvals

Logo	Description
	CHINA SJ/T 11364-2014, China RoHS Chart: http://www.globtek.com/pdf/F-GT-DJD-8.4.1-006%20China%20RoHS%20Declaration%205-20-22.pdf
	
	Indoor Use Only - Mark is on the label or Molded in the case
 GlobTek, Inc.	JAPAN TUV R-PSE, Cert. No. JD 50469658, to J62368-1(H30) , J55032(H29),J3000(H25)[15V or less]. Please reference the following website for guidelines on PSE regulations: https://www.globtek.com/r2/Szj4Vb
RoHS	Specifications of directive 2011/65/EU Annex VI (ROHS-2) with amendment 2015/863-EU (ROHS-3) http://www.ce-mark.com/Rohs%20final.pdf
	UKCA Certification
 10276	Ukraine UKRSepro (Document: www.globtek.com/html/iso_certificates/GT_Ukraine.pdf)
	Japan: Voluntary Control Council for Interference (VCCI)
	WEEE: Complies with EU 2012/19/EU (http://ec.europa.eu/environment/waste/weee/index_en.htm) Mark is on the label or Molded in the case