

Model:GT-41133-90VV-x.x-T3

May 11, 2025

GT-41133-90VV-x.x-T3

Information

Model Number

GT-41133-90VV-x.x-T3

Description

GT-41133-90VV-x.x-T3, ICT/ITE Power Supply, Desktop/External, Regulated Switchmode AC-DC Power Supply AC Adaptor, , Input Rating: 100-240V~, 50-60 Hz, IEC 60320/C14 AC Inlet Connector, Class I, Earth Ground, Output Rating: 90 Watts, Power rating with convection cooling (W) , 12-48V in 0.1V increments, Approvals: CB 60950; CCC; China RoHS; WEEE; Class I; VCCI; NEMKO 60950; Level V; Ukraine; NrCAN; PSE; FCC; RoHS; Korea (36V, 48V only); Korea (19V, 24V only); CB 60950; UL/cUL; LPS (24V and 48V only); RCM; South Africa (pending); S-Mark 60950; India BIS; Taiwan BSMI (12, 19, 24 and 48V Onl; IRAM;

Model Picture



Agency Documents

<http://www.globtek.info/certs/GT-41133-T2-T3-T3A/>

CE EC-Declaration

https://www.globtek.com/pdf/ec_declaration/a0030000007P7YdEAK

RoHS/RoHS2 Declaration

https://www.globtek.com/pdf/rohs_cert/a0030000007P7YdEAK

REACH Declaration

https://www.globtek.com/pdf/iso_certificates/REACH.pdf

Conflict Minerals Declaration

<https://www.globtek.com/pdf/conflict-minerals.pdf>

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-41133-90VV-x.x-T3

May 11, 2025

MODEL PARAMETERS


Type	Desktop/External
Technology	Regulated Switchmode AC-DC Power Supply AC Adaptor
Category	ICT/ITE Power Supply
Input Voltage	100-240V~, 50-60 Hz
I/P Amps (A)	1.5A
Wattage (W)	90.0
Vout Range (V)	12-48
Efficiency Level	V
Ingress Protection	IP40
Size (mm)	62.4 x 167.3 x 33.5

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-41133-90VV-x.x-T3

May 11, 2025

ENCLOSURE

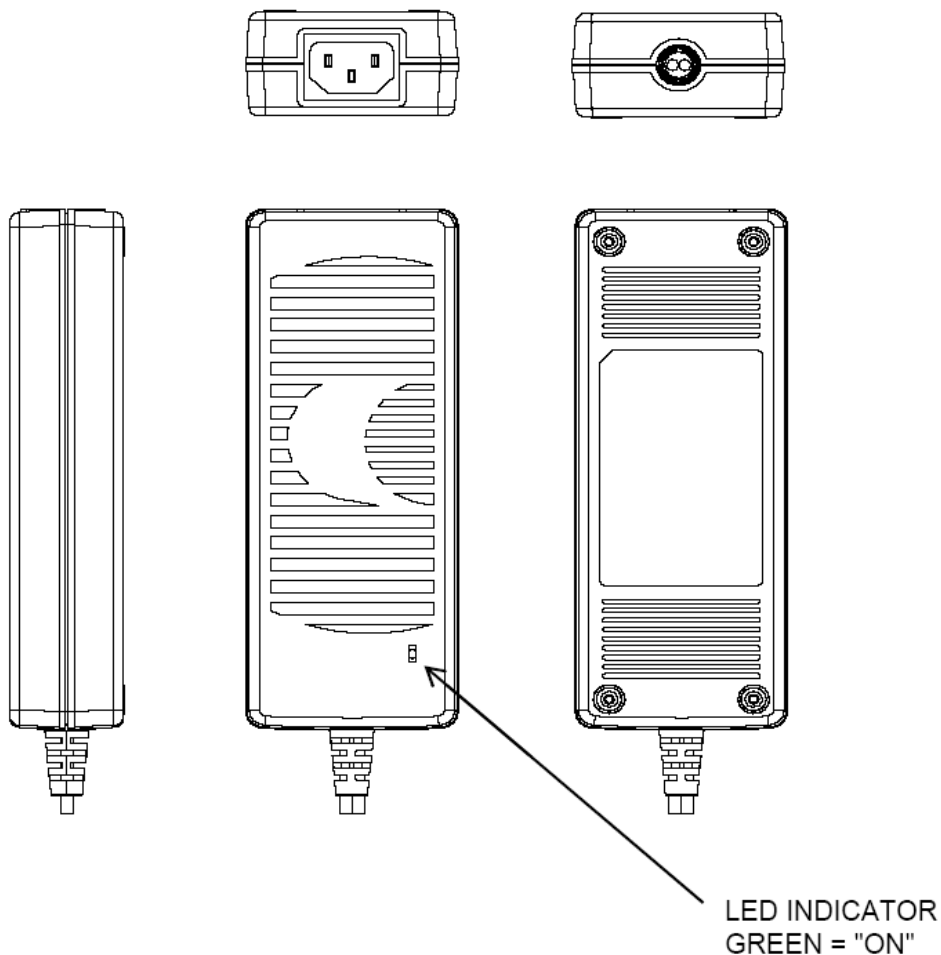

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-41133-90VV-x.x-T3

May 11, 2025

RATING TABLE

Model Number	Voltage	Amps(A)	Watts(W)	RFQ
GT-41133-9015-3.0-T3	12 V	7.5	90.00	RFQ
GT-41133-9015-T3	15 V	6	90.00	RFQ
GT-41133-9028-10.0-T3	18 V	5	90.00	RFQ
GT-41133-9028-9.5-T3	18.5 V	4.8	88.80	RFQ
GT-41133-8128-9.5-T3	18.5 V	4.39	81.22	RFQ
GT-41133-9028-9.0-T3	19 V	4.74	90.06	RFQ
GT-41133-9028-8.0-T3	20 V	4.5	90.00	RFQ
GT-41133-9028-4.0-T3	24 V	3.75	90.00	RFQ
GT-41133-9048-12.0-T3	36 V	2.5	90.00	RFQ
GT-41133-9048-T3	48 V	1.875	90.00	RFQ

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<https://www.globtek.com/ds/Ef8fNmYajs/GpceAmm3nnA.html#datasheet>

Model:GT-41133-90VV-x.x-T3

May 11, 2025

SPECIFICATIONS

A) ELECTRICAL SPECIFICATIONS:

01. Input Voltage: Specified 90-264 Vac, Nameplate rated: 100-240Vac
02. Input Frequency: Specified 47-63 Hz, Nameplate rated 50-60Hz
03. Line Voltage Regulation: +/- 1% typical measured at the output connector
04. Output Ripple (Vp-p): +/-1% or 150 mV whichever is greater, measured at 20 MHz bandwidth with 0.1 uf ceramic capacitor in parallel with 10 uf electrolytic capacitor connected at the end of the output connector at nominal line
05. Turn-ON/OFF Overshoot: 5% maximum, 1 mS typical recovery time for 25% step load
06. Turn-ON Delay: 1 sec, maximum @ full load, nominal line
07. Hold-Up Time: 8 mS typical at nominal input voltage and full load
08. Inrush Current: 30A typical at 115VAC input and 60A typical at 230 VAC input
09. Switching Frequency: 65 KHz typical

B) PROTECTION

01. Over-Voltage: Protected Zener clamp across the output
02. Short Circuit: Protected unit will auto recover upon removal of fault
03. Input Protection: Input line fusing

C) SAFETY

01. Dielectric Withstand Voltage: 4242Vdc from primary to secondary
02. Earth Leakage Current: <3.5 mA at 240Vac input voltage
03. Earth continuity test : <0.1 Ohm or 0.2 Ohm plus supply cord for Class I Only

D) OTHER:

01. MTBF: 200,000 Hours @ 25°C ambient temperature
02. Operating Temperature: 0°C to 40°C ambient temperature
03. Humidity: 0% to 90% relative humidity
04. Storage Temperature: -10°C to 80°C
05. Cooling: Convection

E) ENCLOSURE

01. Housing: High impact plastic, 94V0 polycarbonate, non-vented
02. Size: 62.4 x 167.3 x 33.5mm +/-1.0 mm
03. LED Green LED Indicator
04. Markings: Label and/or Pad Printed and/or Molded in the case

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-41133-90VV-x.x-T3

May 11, 2025

DERATING CURVE


Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-41133-90VV-x.x-T3

May 11, 2025

INPUT CONFIGURATION

Description IEC 60320/C14 AC Inlet Connector, Class I, Earth Ground



Mates with IEC 60320/C13 Plug

Optional Locking IEC60320 Receptacle and cord option available on some models by request.:



[Standard International IEC 320/C13 Cordsets](#)

Below are standard cordsets which are "not included" (unless stated above); these can be purchased separately or packaged with the power supply. Contact your Sales Engineer if the style required is not shown below. Many more available in different lengths, colors or cable material.

Stock Power Supply Cords

Part Number/ Link	Country	Plug	Termination	Length (mm)	(Ft)
3021457F701(R)	N. American (Type B)	NEMA 5-15P	IEC 320/C13	2150	7
1191068F0701(R)	N. American (Type B)	NEMA 5-15P Hospital	IEC 320/C13	2459	8
2194272M5701-T(R)	Argentina (Type I)	IRAM 2073	IEC 320/C13	2500	8
5502022M5701A(R)	Australian (Type I)	AS3112 / 3 PRONG	IEC 320/C13	2500	8
204B4272M5701(R)	Brazil (Type N)	BRAZIL	IEC 320/C13	2500	8
6023602M5701(R)	China (Type I)	CCC GR2099	IEC 320/C13	2500	8
G8014272M5701(R)	Danish (Type K)	AFSNIT SECTION 107-2-D1	IEC 320/C13	2500	8
23144272M5701-T(R)	Europe (Type E)	CEE 7/7	IEC 320/C13	2500	8
23134272M5701EUKR(R)	Europe/Korea Combo (Type E)	CEE 7/7 / KSC8305	IEC 320/C13	2500	8
205IN4272M5701(R)	India (Type D)	India IS 1293 (also known as IA16A3 or BS546)	IEC 320/C13	2500	8

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<https://www.globtek.com/ds/Ef8fNmYajs/GpceAmm3nnA.html#datasheet>

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-41133-90VV-x.x-T3

May 11, 2025

208IN4272M5701(R)	India (Type M)	India IS 1293 (also known as IA16A3 or BS546)	IEC320/C13	2500	8
377C4272M5701(R)	Israel (Type H)	ISL 377C	IEC 320/C13	2500	8
23024272M5701(R)	Italy (Type L)	CEI 23-16/VII	IEC 320/C13	2500	8
3003339F701(R) [3x1.25mm2]	Japan (Type B)	JIS 8303 / 3 PINS	IEC 320/C13	2500	8
3003068F2701-HK(R) [3 x 2.0mm2]					
302J115J6F0701J(R)	North America / Japan (Type B – 12A)	NEMA 5-15P (cULus approved), Japan JIS C 8303 (PSE Approved)	IEC 320/C13	1830	6
302J104J6F0701J(R)	North America / Japan (Type B – 15A)	NEMA 5-15P (cULus approved), Japan JIS C 8303 (PSE Approved)	IEC 320/C13	1830	6
302JT104J9F0701JT(R)	North America / Japan / Taiwan (Type B – 15A)	NEMA 5-15P (cULus approved), Japan JIS C 8303 (PSE Approved), Taiwan CNS 6797 (BSMI Approved)	IEC 320/C13	2800	9
2313K3432M5701(R)	Korea (Type F)	KS C 8305	IEC 320/C13	2500	8
5804272M5701(R)	Russia (Type F)	GOST 7396	IEC 320/C13	2500	8
2084272M5701(R)	South Africa (Type M)	South Africa SABS164-1 (16A type)	IEC 320/C13	2500	8
23214272M5701(R)	Switzerland (Type J)	SEV 1011	IEC 320/C13	2500	8
3003322M5701(R)	Taiwan (Type B)	BSMI	IEC 320/C13	2500	8
6363762M5701(R)	Thailand (Type O)	TIS 166-2549	IEC 320/C13	2500	8
PZ0800100-2M5BK13H(R)	UK, Hong Kong, Singapore, Gulf States (Type G)	BS 1363A	IEC 320/C13	2500	8
7055002M5701A(R)	International	IEC 320 C14-C13	IEC 320/C13	2500	8

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-41133-90VV-x.x-T3

May 11, 2025

OUTPUT CONFIGURATION

Common output connector options:



L Type (Coaxial
5.5x2.5mm plug)



C Type (Coaxial
5.5x2.1mm plug)



K Type (Coaxial
3.5x1.3mm plug)



LL Type (5.5x2.5mm
Locking 760k type)



CL Type (5.5x2.1mm
Locking S761k type)



ML2 Type (Molex
housing 43025-0200)



YL3 Type
(KPPX-3P)



YL4 Type (KPPX-4P)



EJ1/2/3/4/5 (EIAJ
RC-5320A type
connectors)



MSB Type (Micro
USB)



USBC Type (USB
Type C)



Inquire for custom
design


For a comprehensive list of options, [click here](#)

Contact GlobTek for your specific requirements or custom solutions.

Model:GT-41133-90VV-x.x-T3

May 11, 2025

Approvals

Logo	Description
	Taiwan BSMI (12, 19, 24 and 48V designs only); http://www.bsmi.gov.tw/wSite/ct?xItem=4072&ctNode=816&mp=2
No Logo Applicable	IEC 60950-1:2005 (Second Edition) + Am 1:2009 + Am 2:2013
No Logo	IEC 60950-1: 2005 (Second Edition) + Am 1: 2009 + Am 2: 2013
	CCC Altitude up to 5000 m GB17625.1-2012, GB4943.1-2011, GB/T9254-2008
	CHINA SJ/T 11364-2014, China RoHS Chart: http://www.globtek.com/pdf/F-GT-DJD-8.4.1-006%20China%20RoHS%20Declaration%205-20-22.pdf
	UL60950-1, cULus to UL 60950-1, 2nd Edition, 2007-03-27 and CSA C22.2 No. 60950-1-07, 2nd Edition, 2007-03
	Compliance of this power supply with FCC Part 15, Class B has been demonstrated with a standard output load. The FCC law stipulates that system-level testing is required to demonstrate compliance with the FCC emission limits with the actual system load.
	Bureau Of Indian Standards for GT-41133-9015-3.0-T3, -9015-T3, -9028-10.0-T3, -9028-9.0-T3, -9028-4.0-T3, -9048-12.0-T3, -9048-T3, -9048-9.5-T3, -8128-9.5-T3

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-41133-90VV-x.x-T3

May 11, 2025

	Indoor Use Only - Mark is on the label or Molded in the case
 DC-E-G71-001.13 PRECAUCION: PARA USO EN EQUIPOS ELECTRONICOS SOLAMENTE	IRAM certificate DC-E-G71-001.13 to IEC 60950-1:2005 + A1:2009 +A2:2013
 직류전원장치 AC/DC ADAPTER KTC HU10499-12010A 최저소비효율기준 만족 제품 모델명:GT-41133-9028-4.0-T3 Mfr Name: GLOBTEK (SUZHOU) CO.,LTD A/S Center: 10-6221-6100	Korea HU10499-12010A, (19V, 24V only)
 직류전원장치 AC/DC ADAPTER KTC HU10499-13011A 최저소비효율기준 만족 제품 모델명:GT-41134-9048-T3 Mfr Name: GLOBTEK (SUZHOU) CO.,LTD A/S Center: 10-6221-6100	Korea HU10499-13011A (36V, 48V only)
EFFICIENCY LEVEL 	Efficiency: complies to section 301 of Energy Independence and Security Act (EISA) complies with Energy Star tier 2 (North America), ECP tier 2 (China), MEPS tier 2 (Australia), Code of Conduct (Europe)
LPS	Limited Power Source LPS (24V and 48V only)
	NEMKO EN60950-1:2006, A11, A1, A12, A2
 EEV1191	Natural Resources Canada (NRCAN): CSA Standard C381.1-08, QSP NRCAN EEV1191; http://shop.csa.ca/en/canada/energy-efficiency/canicsa-c3811-08/inv/27024802008
 GlobTek, Inc.	JAPAN TUV Rheinland-PSE GlobTek Inc to J60950-1(H26) , J55022(H22),J3000(H25).Please follow the procedure listed in the following link for proper import to Japan: https://www.globtek.com/r2/Szj4Vb
 N136 SAA120749EA	RCM certificate SAA120749EA; Australia and New Zealand Regulatory Compliance, Mark (http://rcm.standards.org.au/rcmfaq/rcmfaq.htm)
RoHS	Specifications of directive 2011/65/EU Annex VI (ROHS-2) with amendment 2015/863-EU (ROHS-3) http://www.ce-mark.com/Rohs%20final.pdf

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<https://www.globtek.com/ds/Ef8fNmYajs/GpceAmm3nnA.html#datasheet>

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-41133-90VV-x.x-T3

May 11, 2025

	S-Mark Certificate EN 60950-1:2006 + A11:2009 + A1:2010 + A12:2011 +A2:2013 (http://www.intertek.com/marks/s/)
No Logo	SOUTH AFRICAN EMI/EMC SABS
	Ukraine UKRSePro (Document: www.globtek.com/html/iso_certificates/GT_Ukraine.pdf)
	Japan: Voluntary Control Council for Interference (VCCI)
	WEEE: Complies with EU 2012/19/EU (http://ec.europa.eu/environment/waste/weee/index_en.htm) Mark is on the label or Molded in the case