

Model:GT-21131

May 14, 2024

GT-21131

Information

Model Number	GT-21131
Description	GT-21131, ICT/ITE Power Supply, Desktop/External, Regulated Switchmode AC-DC Power Supply AC Adaptor, , Input Rating: 100-240V~, 50-60 Hz, IEC 60320/C14 AC Inlet Connector, Class I, Earth Ground, Output Rating: 72 Watts, Power rating with convection cooling (W) , 12-24V in 0.1V increments, Approvals: WEEE; Class I; Ukraine; GOST-R; China RoHS; PSE; CE; RoHS; CCC; VCCI; LPS (24V only); cULus; CB 60950; IP40; PSE; PSE;
Model Picture	
Agency Documents	http://www.globtek.info/certs/GT-21131/
CE EC-Declaration	https://www.globtek.com/pdf/ec_declaration/a0O30000007P7ZXEA0
RoHS/RoHS2 Declaration	https://www.globtek.com/pdf/rohs_cert/a0O30000007P7ZXEA0
REACH Declaration	https://www.globtek.com/pdf/iso_certificates/REACH.pdf
Conflict Minerals Declaration	https://www.globtek.com/pdf/conflict-minerals.pdf

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-21131

May 14, 2024

MODEL PARAMETERS


Type	Desktop/External
Technology	Regulated Switchmode AC-DC Power Supply AC Adaptor
Category	ICT/ITE Power Supply
Input Voltage	100-240V~, 50-60 Hz
I/P Amps (A)	1.6A
Wattage (W)	72.0
Vout Range (V)	12-24
Efficiency Level	N/A
Ingress Protection	IP40
Size (mm)	141 * 76 * 43

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-21131

May 14, 2024

ENCLOSURE

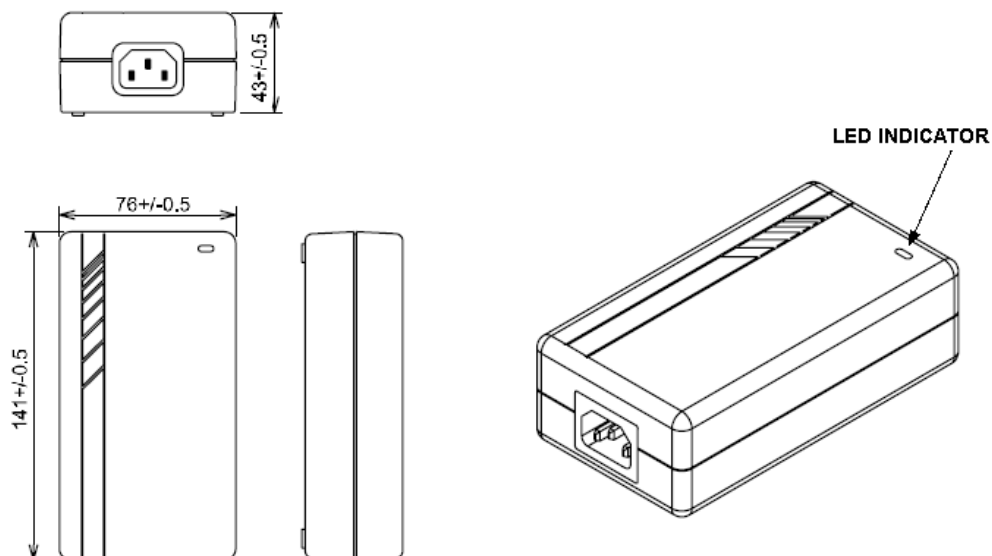

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-21131

May 14, 2024

RATING TABLE

Model Number	Voltage	Amps(A)	Watts(W)	RFQ
GT-21131-6012	12 V	5	60.00	RFQ
GT-21131-7212	12 V	6	72.00	RFQ
GT-21131-7219-4.0	15 V	4.8	72.00	RFQ
GT-21131-7219	19 V	3.8	72.20	RFQ
GT-21131-7224	24 V	3	72.00	RFQ

Model:GT-21131

May 14, 2024

SPECIFICATIONS

A) ELECTRICAL SPECIFICATIONS:

- 01. Input Voltage: Specified 90-264 Vac, Nameplate rated: 100-240Vac
- 03. Input Frequency: Specified 47-63 Hz, Nameplate rated 50-60Hz
- 04. Output Regulation: +/- 5% measured at the output connector
- 05. Line Voltage Regulation: +/- 1% typical measured at full load
- 06. Output Ripple (Vp-p): +/- 1% of output voltage or 50mV whichever is greater @ 120Vac
- 07. Turn-ON/OFF: 5% maximum, 1 mS typical recovery time for 25% step load
- 08. Turn-ON Delay: 3 Sec, typical
- 09. Hold-Up Time: 10 mS typical @ nominal input voltage and full load
- 10. Inrush Current: 20A maximum cold start @ 240Vac input
- 11. Switching Frequency: 100 KHz typical, varies with line and load
- 12. Efficiency: 75% typical @ nominal input & full load

B) PROTECTION

- 01. Over-Voltage: limited via crowbar method
- 02. Short Circuit: Momentary short circuit protected with auto recovery upon removal of short
- 03. Over-load: Hiccup with auto recovery protected with auto recovery upon removal of short
- 04. Input Protection: Input line

C) SAFETY

- 01. Dielectric Withstand Voltage: 4242 Vdc from primary to secondary (for Class II with functional ground)
- 02. Earth continuity test: <0.1 Ohm or < 0.2 Ohm when with a non-detachable Power Supply cord, Class I Only
- 03. Touch Current: <0.25mA @ 240Vac input voltage
- 04. Earth Leakage Current: <3.5 mA at 240Vac input voltage
- 05. ROHS 2: Complies with EU 2011/65/EU and China SJ/T 11363-2006

D) OTHER:

- 01. MTBF: 200,000 Hours @ 25°C ambient temperature
- 02. Operating Temperature: 0°C to 40°C ambient temperature
- 03. Humidity: 0% to 90% relative humidity
- 04. Storage Temperature: -10°C to 80°C
- 05. Cooling: Convection

E) ENCLOSURE

- 01. Housing: High impact plastic, 94V0 polycarbonate, non-vented
- 02. Size: 141*76*43 ± 0.5 mm
- 03. Markings: Label and/or Pad Printed and/or Molded in the case
- 04. LED color: Green

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-21131

May 14, 2024


DERATING CURVE

Model:GT-21131

May 14, 2024

INPUT CONFIGURATION

Description IEC 60320/C14 AC Inlet Connector, Class I, Earth Ground

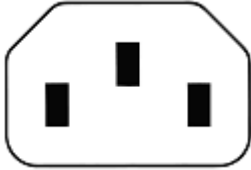

Mates with IEC 60320/C13 Plug

Optional Locking IEC60320 Receptacle and cord option available on some models by request.:



[Standard International IEC 320/C13 Cordsets](#)

Below are standard cordsets which are "not included" (unless stated above); these can be purchased separately or packaged with the power supply. Contact your Sales Engineer if the style required is not shown below. Many more available in different lengths, colors or cable material.

Stock Power Supply Cords

Part Number/ Link	Country	Plug	Termination	Length (mm)	(Ft)
3021457F701(R)	N. American (Type B)	NEMA 5-15P	IEC 320/C13	2150	7
1191068F0701(R)	N. American (Type B)	NEMA 5-15P Hospital	IEC 320/C13	2459	8
2194272M5701-T(R)	Argentina (Type I)	IRAM 2073	IEC 320/C13	2500	8
5502022M5701A(R)	Australian (Type I)	AS3112 / 3 PRONG	IEC 320/C13	2500	8
204B4272M5701(R)	Brazil (Type N)	BRAZIL	IEC 320/C13	2500	8
6023602M5701(R)	China (Type I)	CCC GR2099	IEC 320/C13	2500	8
G8014272M5701(R)	Danish (Type K)	AFSNIT SECTION 107-2-D1	IEC 320/C13	2500	8
			IEC		

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<https://www.globtek.com/ds/HjzspPZhctT/ZH24cFaFGAp.html>

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-21131

May 14, 2024

23144272M5701-T(R)	Europe (Type E)	CEE 7/7	320/C13	2500	8
23134272M5701EUKR(R)	Europe/Korea Combo (Type E)	CEE 7/7 / KSC8305	IEC 320/C13	2500	8
205IN4272M5701(R)	India (Type D)	India IS 1293 (also known as IA16A3 or BS546)	IEC 320/C13	2500	8
208IN4272M5701(R)	India (Type M)	India IS 1293 (also known as IA16A3 or BS546)	IEC 320/C13	2500	8
377C4272M5701(R)	Israel (Type H)	ISL 377C	IEC 320/C13	2500	8
23024272M5701(R)	Italy (Type L)	CEI 23-16/VII	IEC 320/C13	2500	8
3003339F701(R) [3x1.25mm2]	Japan (Type B)	JIS 8303 / 3 PINS	IEC 320/C13	2500	8
3003068F2701-HK(R) [3 x 2.0mm2]					
302J115J6F0701J(R)	North America / Japan (Type B – 12A)	NEMA 5-15P (cULus approved), Japan JIS C 8303 (PSE Approved)	IEC 320/C13	1830	6
302J104J6F0701J(R)	North America / Japan (Type B – 15A)	NEMA 5-15P (cULus approved), Japan JIS C 8303 (PSE Approved)	IEC 320/C13	1830	6
302JT104J9F0701JT(R)	North America / Japan / Taiwan (Type B – 15A)	NEMA 5-15P (cULus approved), Japan JIS C 8303 (PSE Approved), Taiwan CNS 6797 (BSMI Approved)	IEC 320/C13	2800	9
2313K3432M5701(R)	Korea (Type F)	KS C 8305	IEC 320/C13	2500	8
5804272M5701(R)	Russia (Type F)	GOST 7396	IEC 320/C13	2500	8
2084272M5701(R)	South Africa (Type M)	South Africa SABS164-1 (16A type)	IEC 320/C13	2500	8
23214272M5701(R)	Switzerland (Type J)	SEV 1011	IEC 320/C13	2500	8
3003322M5701(R)	Taiwan (Type B)	BSMI	IEC 320/C13	2500	8
6363762M5701(R)	Thailand (Type O)	TIS 166-2549	IEC 320/C13	2500	8
PZ0800100-2M5BK13H(R)	UK, Hong Kong, Singapore, Gulf States (Type G)	BS 1363A	IEC 320/C13	2500	8
7055002M5701A(R)	International	IEC 320 C14-C13	IEC 320/C13	2500	8

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-21131

May 14, 2024

OUTPUT CONFIGURATION

Common output connector options:



L Type (Coaxial
5.5x2.5mm plug)



C Type (Coaxial
5.5x2.1mm plug)



K Type (Coaxial
3.5x1.3mm plug)



LL Type (5.5x2.5mm
Locking 760k type)



CL Type (5.5x2.1mm
Locking S761k type)



ML2 Type (Molex
housing 43025-0200)



YL3 Type
(KPPX-3P)



YL4 Type (KPPX-4P)



EJ1/2/3/4/5 (EIAJ
RC-5320A type
connectors)



MSB Type (Micro
USB)



USBC Type (USB
Type C)



Inquire for custom
design

For a comprehensive list of options, [click here](#)

Contact GlobTek for your specific requirements or custom solutions.

Model:GT-21131

May 14, 2024

Approvals

Logo	Description
	Attention Mark / Refer to operating manual for operating and service instructions
No Logo	CB Report IEC60950-1:2005 (2nd Edition), Am 1: 2009 + Am 2:2013
 仅适用于在海拔2000m以下地区使用 仅适用于在正常气候条件下使用	CCC to GB4943.1-2011 GB9254-2008 GB17625.1-2012
	CE Mark: tested to comply with EN55022:2006/A1:2007 Class B, EN610003-2, EN610003-3 including EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6N EN61000-4-11; EMI: Complies with EN55011 CLASS B and FCC Part 15B - On label or Molded in case
	CHINA SJ/T 11364-2014, China RoHS Chart: http://www.globtek.com/pdf/F-GT-DJD-8.4.1-006%20China%20RoHS%20Declaration%205-20-22.pdf
	UL60950-1, cULus to UL 60950-1, 2nd Edition, 2007-03-27 and CSA C22.2 No. 60950-1-07, 2nd Edition, 2007-03
	GOST-R mark for Russia(Document: http://www.globtek.com/html/iso_certificates/GT_GOST-R.pdf). 03/15/2015. Due to lack of demand, GlobTek will not be renewing it's GOST certification. Please contact your sales engineer for pricing on EAC.
	Indoor Use Only - Mark is on the label or Molded in the case
IP40	Ingress Protection: ?IP40 to IEC60529:2001 Protection against granular foreign bodies
 GlobTek, Inc.	JAPAN TUV R-PSE, Cert. No. JD 50313287, to J60950-1(H26) , J55022(H22),J3000(H25)[DC15?30V]. Please reference the following website for guidelines on PSE regulations: https://www.globtek.com/r2/Szj4Vb

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-21131

May 14, 2024

 GlobTek, Inc.	JAPAN TUV R-PSE, Cert. No. JD 50469658, to J62368-1(H30) , J55032(H29),J3000(H25)[15V or less]. Please reference the following website for guidelines on PSE regulations: https://www.globtek.com/r2/Szj4Vb
LPS	Limited Power Source LPS (24V only)
 GlobTek, Inc.	JAPAN TUV Rheinland-PSE GlobTek Inc to J60950-1(H26) , J55022(H22),J3000(H25).Please follow the procedure listed in the following link for proper import to Japan: https://www.globtek.com/r2/Szj4Vb
RoHS	Specifications of directive 2011/65/EU Annex VI (ROHS-2) with amendment 2015/863-EU (ROHS-3) http://www.ce-mark.com/Rohs%20final.pdf
 10276	Ukraine UKR Sepro (Document: www.globtek.com/html/iso_certificates/GT_Ukraine.pdf)
	Japan: Voluntary Control Council for Interference (VCCI)
	WEEE: Complies with EU 2012/19/EU (http://ec.europa.eu/environment/waste/weee/index_en.htm) Mark is on the label or Molded in the case