

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-41132-60VV-x.x-T3

May 5, 2024

GT-41132-60VV-x.x-T3

Information

Model Number

GT-41132-60VV-x.x-T3

Description

GT-41132-60VV-x.x-T3, ICT/ITE Power Supply, Desktop/External, Regulated Switchmode AC-DC Power Supply AC Adaptor, , Input Rating: 100-240V~, 50-60 Hz, IEC 60320/C14 AC Inlet Connector, Class I, Earth Ground, Output Rating: 60 Watts, Power rating with convection cooling (W) , 12-24V in 0.1V increments, Approvals: CCC; UKCA; Korea (12V 15V Only); CE; cULus; NrCAN; China RoHS; WEEE; Class I; VCCI; PSE; Ukraine; Level V; RoHS; CB 60950; LPS 60950; ST-Malaysia; CB up to 45C @ 40W; CE; Israel (12V only); India BIS (12V only); IRAM; PSE; PSE; IP40; EAC; Korea (19V, 20V,24V only); FCC; RCM;

Model Picture



Agency Documents

<http://www.globtek.info/certs/GT-41132-T2-T3-T3A/>

CE EC-Declaration

https://www.globtek.com/pdf/ec_declaration/a0030000008UmwIEAC

RoHS/RoHS2 Declaration

https://www.globtek.com/pdf/rohs_cert/a0030000008UmwIEAC

REACH Declaration

https://www.globtek.com/pdf/iso_certificates/REACH.pdf

Conflict Minerals Declaration

<https://www.globtek.com/pdf/conflict-minerals.pdf>

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-41132-60VV-x.x-T3

May 5, 2024

MODEL PARAMETERS




Type	Desktop/External
Technology	Regulated Switchmode AC-DC Power Supply AC Adaptor
Category	ICT/ITE Power Supply
Input Voltage	100-240V~, 50-60 Hz
I/P Amps (A)	1.5A
Wattage (W)	60.0
Vout Range (V)	12-24
Efficiency Level	V
Ingress Protection	IPX0, IPx1 or higher available
Size (mm)	47*114*32.4

Delivering leading edge, innovative power solutions for more than 30 years....


Model:GT-41132-60VV-x.x-T3

May 5, 2024

ENCLOSURE

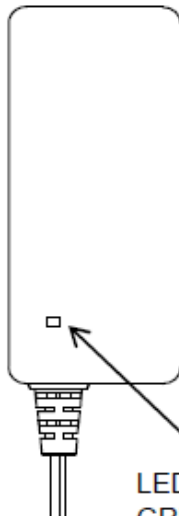

LED INDICATOR
GREEN = "ON"

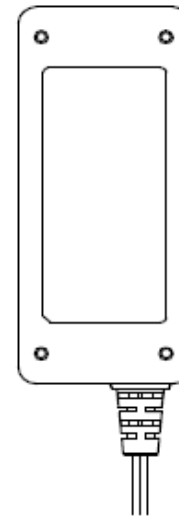

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-41132-60VV-x.x-T3

May 5, 2024

RATING TABLE

Model Number	Voltage	Amps(A)	Watts(W)	RFQ
GT-41132-6012-T3	12 V	5	60.00	RFQ
GT-41132-6024-10.2-T3	13.8 V	4.34	59.89	RFQ
GT-41132-6024-9.0-T3	15 V	4	60.00	RFQ
GT-41132-6024-6.0-T3	18 V	3.33	59.94	RFQ
GT-41132-6524-T3	24 V	2.7	64.80	RFQ

Model:GT-41132-60VV-x.x-T3

May 5, 2024

SPECIFICATIONS

A) ELECTRICAL SPECIFICATIONS:

01. Input Voltage: Specified 90-264 Vac, Nameplate rated: 100-240Vac
02. Input Frequency: Specified 47-63 Hz, Nameplate rated 50-60Hz
03. Output Regulation: +/- 5% measured at the output connector
04. Line Voltage Regulation: +/- 1% typical measured at output connector
05. Output Ripple (Vp-p): +/-1% or 150 mV whichever is greater, measured at 20 MHz bandwidth with 0.1 uf ceramic capacitor in parallel with 10 uf electrolytic capacitor connected at the end of the output connector at nominal line
06. Turn-ON/OFF Overshoot: 5% maximum, 1 mS typical recovery time for 25% to 50% step load
07. Turn-ON Delay: 1 Second Typical
08. Hold-Up Time: 8 mS typical @ nominal input voltage and full load
09. Inrush Current: 30/60A maximum cold start @ 115/230 Vac input
10. Switching Frequency: 65 KHz typical

B) PROTECTION

01. Over-Voltage: Electronically Protected Zener clamp across the output
02. Short Circuit: Electronically Protected unit will auto recover upon removal of fault
03. Input Protection: Input line fusing

C) SAFETY

01. Dielectric Withstand Voltage: 4242Vdc from primary to secondary
02. Earth Leakage Current: <3.5 mA at 240Vac input voltage
03. Touch Current: <0.25mA @ 240Vac input voltage
04. ROHS 2: Complies with EU 2011/65/EU and China SJ/T 11363-2006
05. Earth continuity test: 0.1 Ohm

D) OTHER:

01. MTBF: 200,000 Hours @ 25°C ambient temperature
02. Operating Temperature: 0°C to 40°C ambient temperature
03. Humidity: 0% to 90% relative humidity
04. Storage Temperature: -10°C to 80°C
05. Cooling: Convection
06. ROHS 2: Complies with EU 2011/65/EU and China SJ/T 11363-2006

E) ENCLOSURE


01. Housing: High impact plastic, 94V0 polycarbonate, non-vented
02. Size: 114*47*32.4 +/-1.0 mm
03. Markings: Label and/or Pad Printed and/or Molded in the case

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-41132-60VV-x.x-T3

May 5, 2024

DERATING CURVE

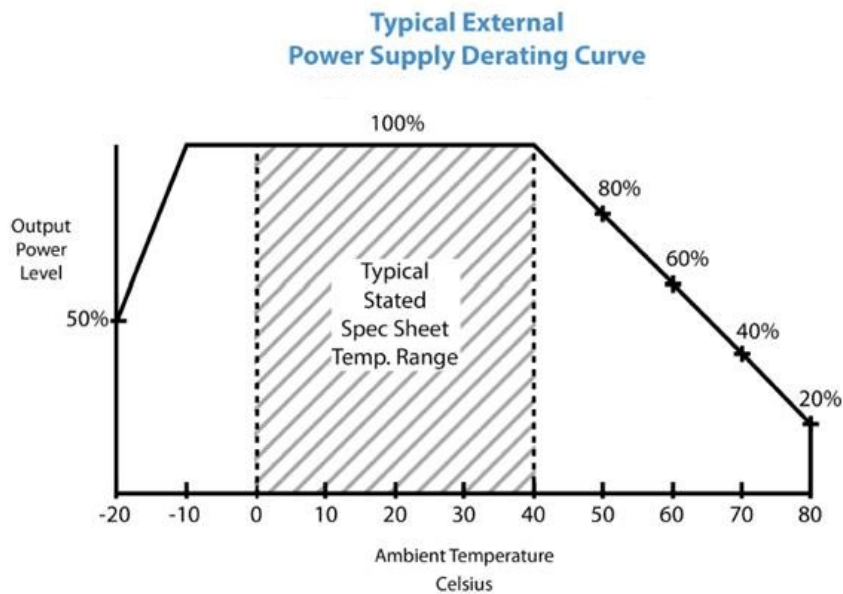


Model:GT-41132-60VV-x.x-T3

May 5, 2024

INPUT CONFIGURATION

Description IEC 60320/C14 AC Inlet Connector, Class I, Earth Ground

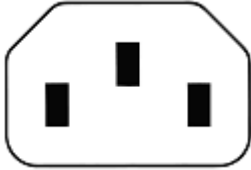

Mates with IEC 60320/C13 Plug

Optional Locking IEC60320 Receptacle and cord option available on some models by request.:



[Standard International IEC 320/C13 Cordsets](#)

Below are standard cordsets which are "not included" (unless stated above); these can be purchased separately or packaged with the power supply. Contact your Sales Engineer if the style required is not shown below. Many more available in different lengths, colors or cable material.

Stock Power Supply Cords

Part Number/ Link	Country	Plug	Termination	Length (mm)	(Ft)
3021457F701(R)	N. American (Type B)	NEMA 5-15P	IEC 320/C13	2150	7
1191068F0701(R)	N. American (Type B)	NEMA 5-15P Hospital	IEC 320/C13	2459	8
2194272M5701-T(R)	Argentina (Type I)	IRAM 2073	IEC 320/C13	2500	8
5502022M5701A(R)	Australian (Type I)	AS3112 / 3 PRONG	IEC 320/C13	2500	8
204B4272M5701(R)	Brazil (Type N)	BRAZIL	IEC 320/C13	2500	8
6023602M5701(R)	China (Type I)	CCC GR2099	IEC 320/C13	2500	8
G8014272M5701(R)	Danish (Type K)	AFSNIT SECTION 107-2-D1	IEC 320/C13	2500	8
			IEC		

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<https://www.globtek.com/ds/6D7zLMYK8jC/fifDEHGUEkY.html>

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-41132-60VV-x.x-T3

May 5, 2024

23144272M5701-T(R)	Europe (Type E)	CEE 7/7	320/C13	2500	8
23134272M5701EUKR(R)	Europe/Korea Combo (Type E)	CEE 7/7 / KSC8305	IEC 320/C13	2500	8
205IN4272M5701(R)	India (Type D)	India IS 1293 (also known as IA16A3 or BS546)	IEC 320/C13	2500	8
208IN4272M5701(R)	India (Type M)	India IS 1293 (also known as IA16A3 or BS546)	IEC 320/C13	2500	8
377C4272M5701(R)	Israel (Type H)	ISL 377C	IEC 320/C13	2500	8
23024272M5701(R)	Italy (Type L)	CEI 23-16/VII	IEC 320/C13	2500	8
3003339F701(R) [3x1.25mm2]	Japan (Type B)	JIS 8303 / 3 PINS	IEC 320/C13	2500	8
3003068F2701-HK(R) [3 x 2.0mm2]					
302J115J6F0701J(R)	North America / Japan (Type B – 12A)	NEMA 5-15P (cULus approved), Japan JIS C 8303 (PSE Approved)	IEC 320/C13	1830	6
302J104J6F0701J(R)	North America / Japan (Type B – 15A)	NEMA 5-15P (cULus approved), Japan JIS C 8303 (PSE Approved)	IEC 320/C13	1830	6
302JT104J9F0701JT(R)	North America / Japan / Taiwan (Type B – 15A)	NEMA 5-15P (cULus approved), Japan JIS C 8303 (PSE Approved), Taiwan CNS 6797 (BSMI Approved)	IEC 320/C13	2800	9
2313K3432M5701(R)	Korea (Type F)	KS C 8305	IEC 320/C13	2500	8
5804272M5701(R)	Russia (Type F)	GOST 7396	IEC 320/C13	2500	8
2084272M5701(R)	South Africa (Type M)	South Africa SABS164-1 (16A type)	IEC 320/C13	2500	8
23214272M5701(R)	Switzerland (Type J)	SEV 1011	IEC 320/C13	2500	8
3003322M5701(R)	Taiwan (Type B)	BSMI	IEC 320/C13	2500	8
6363762M5701(R)	Thailand (Type O)	TIS 166-2549	IEC 320/C13	2500	8
PZ0800100-2M5BK13H(R)	UK, Hong Kong, Singapore, Gulf States (Type G)	BS 1363A	IEC 320/C13	2500	8
7055002M5701A(R)	International	IEC 320 C14-C13	IEC 320/C13	2500	8

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-41132-60VV-x.x-T3

May 5, 2024

OUTPUT CONFIGURATION

Common output connector options:



L Type (Coaxial
5.5x2.5mm plug)



C Type (Coaxial
5.5x2.1mm plug)



K Type (Coaxial
3.5x1.3mm plug)



LL Type (5.5x2.5mm
Locking 760k type)



CL Type (5.5x2.1mm
Locking S761k type)



ML2 Type (Molex
housing 43025-0200)



YL3 Type
(KPPX-3P)



YL4 Type (KPPX-4P)



EJ1/2/3/4/5 (EIAJ
RC-5320A type
connectors)



MSB Type (Micro
USB)



USBC Type (USB
Type C)



Inquire for custom
design

For a comprehensive list of options, [click here](#)

Contact GlobTek for your specific requirements or custom solutions.

Model:GT-41132-60VV-x.x-T3

May 5, 2024


Approvals

Logo	Description
No Logo	CB Amendment + 45°C at 40 Watts
No Logo Applicable	CB report to IEC 60950-1(ed.2);am1;am2
	CCC to GB4943.1-2011; GB/T9254-2008 GB17625.1-2012, Tropical <2000
No Logo	CE/LVD + 45°C at 40 Watts
	CE Mark: tested to comply with EN55022:2006/A1:2007 Class B, EN610003-2, EN610003-3 including EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6N EN61000-4-7 EMI: Complies with EN55011 CLASS B and FCC Part 15B - On label or Molded in case
	CHINA SJ/T 11364-2014, China RoHS Chart: http://www.globtek.com/pdf/F-GT-DJD-8.4.1-006%20China%20RoHS%20Declaration%205-11-2014.pdf
	UL60950-1, cULus to UL 60950-1, 2nd Edition, 2007-03-27 and CSA C22.2 No. 60950-1-07 Edition, 2007-03
	Certification # TC RU AR46.B.59626 Custom Union of Russia, Belarus and Kazakhstan
	Compliance of this power supply with FCC Part 15, Class B has been demonstrated with a s output load. The FCC law stipulates that system-level testing is required to demonstrate com with the FCC emission limits with the actual system load.

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-41132-60VV-x.x-T3

May 5, 2024

	Bureau Of Indian Standards for GT-41132-6012-T3
	Indoor Use Only - Mark is on the label or Molded in the case
IP40	Ingress Protection: ?IP40 to IEC60529:2001 Protection against granular foreign bodies
 DC-E-G71-001.3 PRECAUCION: PARA USO EN EQUIPOS ELECTRONICOS SOLAMENTE	IRAM certificate DC-E-G71-001.3 to IEC 60950 + A1:2009
ITE כוח קצו	Electric strength Of Israel Standard SI 60950 Part 1 ? Safety of information technology equipment General requirements, Feb. 2012. (12 Volts Only)
 GlobTek, Inc.	JAPAN TUV R-PSE, Cert. No. JD 50313287, to J60950-1(H26) , J55022(H22),J3000(H25)[DC15?30V]. Please reference the following website for guidelines regulations: https://www.globtek.com/r2/Szj4Vb
 GlobTek, Inc.	JAPAN TUV R-PSE, Cert. No. JD 50469658, to J62368-1(H30) , J55032(H29),J3000(H25)[less]. Please reference the following website for guidelines on PSE regulations: https://www.globtek.com/r2/Szj4Vb
	HU10499-15020A GT-41132-6024-T3 (19V, 20V, 24V only)

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<https://www.globtek.com/ds/6D7zLMYK8jC/fifDEHGUEkY.html>

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-41132-60VV-x.x-T3

May 5, 2024

 직류전원장치 AC/DC ADAPTER KTC HU10499-16031A MSIP-REM-GSZ-41132-6012-T3 전기용품안전관리법에 의한 표시 최저소비효율기준 만족 제품 모델명:GT-41132-6012-T3 Mfr. Name: GLOBTEK (SUZHOU) CO.,LTD A/S Center:10-6221-6100	HU10499-16031A GT-41132-6012-T3 (12V 15V only)
EFFICIENCY LEVEL 	Efficiency: complies to section 301 of Energy Independence and Security Act (EISA) complies Energy Star tier 2 (North America), ECP tier 2 (China), MEPS tier 2 (Australia), Code of Conformity (Europe)
LPS	Limited Power Source 60950
 EEV1191	Natural Resources Canada (NRCAN): CSA Standard C381.1-08, QSP NRCAN EEV1191; http://shop.csa.ca/en/canada/energy-efficiency/canicsa-c3811-08/inv/27024802008
 GlobTek, Inc.	JAPAN TUV Rheinland-PSE GlobTek Inc to J60950-1(H26) , J55022(H22),J3000(H25).Please follow the procedure listed in the following link for proper import to Japan: https://www.globtek.com/r2/Szj4Vb
 GMA-513175-EA	Australia and New Zealand Regulatory Compliance, Mark (A/NZ) http://rcm.standards.org.au/rcmfaq/rcmfaq.htm
RoHS	Specifications of directive 2011/65/EU Annex VI (ROHS-2) with amendment 2015/863-EU (RoHS 2+) http://www.ce-mark.com/Rohs%20final.pdf
No Logo	ST-Malaysia GT-41132-6012-T3 EN60950-1
	UKCA Certification
 10276	Ukraine UKRSepro (Document: www.globtek.com/html/iso_certificates/GT_Ukraine.pdf)
	Japan: Voluntary Control Council for Interference (VCCI)

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-41132-60VV-x.x-T3

May 5, 2024

	WEEE: Complies with EU 2012/19/EU (http://ec.europa.eu/environment/waste/weee/index_en.htm) Mark is on the label or Molded in the case