

Model:GT-43006-40VV-x.x-T3A

May 4, 2024

GT-43006-40VV-x.x-T3A

Information

Model Number	GT-43006-40VV-x.x-T3A
Description	GT-43006-40VV-x.x-T3A, ICT/ITE Power Supply, Desktop/External, Regulated Switchmode AC-DC Power Supply AC Adaptor, , Input Rating: 100-240V~, 50-60 Hz, IEC 60320/C6 AC Inlet Connector, Class I, Earth Ground (aka "Mickey Mouse"), Output Rating: 40 Watts, Power rating with convection cooling (W) , 8-48V in 0.1V increments, Approvals: UKCA; CB 60950; CE; China RoHS; Class I; UL/cUL; EC; GOST-R; IP40; Level V; LPS 60950; PSE; RoHS; Ukraine; VCCI; WEEE;
Model Picture	
Agency Documents	http://www.globtek.info/certs/GT-43006-T2%20-T3%20-T3A/
CE EC-Declaration	https://www.globtek.com/pdf/ec_declaration/a0Oa000000BzyDyEAJ
RoHS/RoHS2 Declaration	https://www.globtek.com/pdf/rohs_cert/a0Oa000000BzyDyEAJ
REACH Declaration	https://www.globtek.com/pdf/iso_certificates/REACH.pdf
Conflict Minerals Declaration	https://www.globtek.com/pdf/conflict-minerals.pdf

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-43006-40VV-x.x-T3A

May 4, 2024

MODEL PARAMETERS






Type	Desktop/External
Technology	Regulated Switchmode AC-DC Power Supply AC Adaptor
Category	ICT/ITE Power Supply
Input Voltage	100-240V~, 50-60 Hz
I/P Amps (A)	1.0A
Wattage (W)	40.0
Vout Range (V)	8-48
Efficiency Level	V
Ingress Protection	IP40
Size (mm)	0

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-43006-40VV-x.x-T3A

May 4, 2024

ENCLOSURE

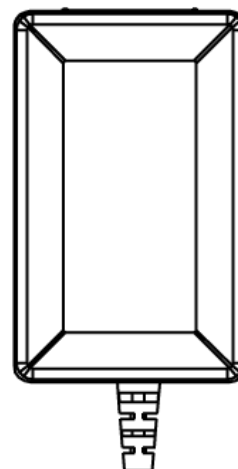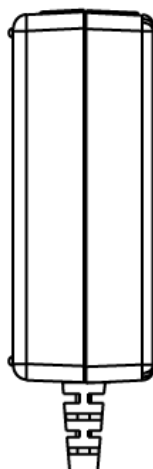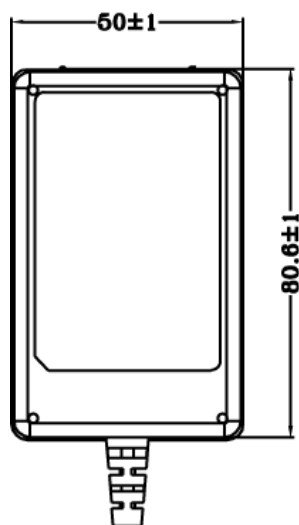

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-43006-40VV-x.x-T3A

May 4, 2024

RATING TABLE

Model Number	Voltage	Amps(A)	Watts(W)	RFQ
GT-43006-2415-7.0-T3A	8 V	3	24.00	RFQ
GT-43006-2715-6.0-T3A	9 V	3	27.00	RFQ
GT-43006-3615-3.0-T3A	12 V	3	36.00	RFQ
GT-43006-4015-3.0-T3A	12 V	3.3	39.60	RFQ
GT-43006-4015-T3A	15 V	2.7	40.50	RFQ
GT-43006-4024-5.0-T3A	19 V	2.1	39.90	RFQ
GT-43006-4024-T3A	24 V	1.67	40.08	RFQ
GT-43006-4048-12.0-T3A	36 V	1.1	39.60	RFQ
GT-43006-4048-T3A	48 V	0.83	39.84	RFQ

Model:GT-43006-40VV-x.x-T3A

May 4, 2024

SPECIFICATIONS

A) ELECTRICAL SPECIFICATIONS:

- 01. Input Voltage: Specified 90-264 Vac, Nameplate rated: 100-240Vac
- 02. Input Frequency: Specified 47-63 Hz, Nameplate rated 50-60Hz03. Output Regulation: +/- 5% measured at the output connector
- 04. Line Voltage Regulation: +/- 1% typical measured at the output connector
- 05. Output Ripple (Vp-p): +/-1% or 150 mV whichever is greater, measured at 20 MHz bandwidth with 0.1 uf ceramic capacitor in parallel with 10 uf electrolytic capacitor connected at the end of the output connector at nominal line
- 06. Turn-ON/OFF Overshoot: 5% maximum, 1 mS typical recovery time for 25% step load
- 07. Turn-ON Delay: 1 second typical
- 08. Hold-Up Time: 8mS typical at nominal input voltage and full load
- 09. Inrush Current: 30A typical at 115Vac input and 60A typical at 230 Vac input
- 10. Switching Frequency: 65 KHz typical

B) PROTECTION

- 01. Over-Voltage: Protected Zener clamp across the output
- 02. Short Circuit: Protected unit will auto recover upon removal of fault
- 03. Input Protection: Input line fusing

C) SAFETY

- 01. Dielectric Withstand Voltage: 4242Vdc from primary to secondary
- 02. Earth Leakage Current: <3.5 mA at 240Vac input voltage
- 03. Earth continuity test:<0.1 Ohm or < 0.2 Ohm when with a non-detachable Power Supply cord, Class I Only
- 04. Touch Current: <0.25mA @ 240Vac input voltage
- 05. ROHS 2: Complies with EU 2011/65/EU and China SJ/T 11363-2006

D) OTHER:

- 01. MTBF: 200,000 Hours @ 25°C ambient temperature
- 02. Operating Temperature: 0°C to 40°C ambient temperature
- 03. Humidity: 0% to 90% relative humidity
- 04. Storage Temperature: -10°C to 80°C
- 05. Cooling: Convection

E) ENCLOSURE

- 01. Housing: High impact plastic, 94V0 polycarbonate, non-vented
- 02. Size: 80.6 x 50.0 x 31 +/-1.0 mm
- 03. Markings: Label and/or Pad Printed and/or Molded in the case
- 04. Color: COOL GRAY PANTONE # 11C and Black

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-43006-40VV-x.x-T3A

May 4, 2024


DERATING CURVE

Model:GT-43006-40VV-x.x-T3A

May 4, 2024

INPUT CONFIGURATION

Description IEC 60320/C6 AC Inlet Connector, Class I, Earth Ground (aka "Mickey Mouse")

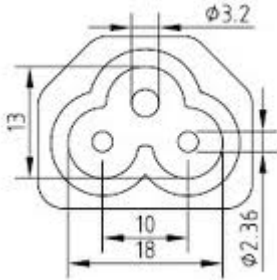

Mates with IEC 60320/C5 Plug

Standard International IEC 320/C5 Cordsets

Below are standard cordsets which are "not included" (unless stated above); these can be purchased separately or package with the power supply. Contact your Sales Engineer if the style required is not shown below. Many more available in different lengths, colors or cable material.

Part Number / Link	Country	Plug	Connector	Length (mm)	Length (ft)
3021066F712(R)	N. American (Type B)	NEMA 5-15P	IEC 320/C5 1880	6	
1191068F0712(R)	N. American (Type B)	NEMA 5-15P Hospital	IEC 320/C5 2459	8	
2194262M0712(R)	Argentina (Type I)	IRAM 2073	IEC320/C5 2050	6.7	
2064262M0712(R)	Australian (Type I)	AS3112 / 3 PRONG	IEC 320/C5 2000	6.6	
204B4262M0712(R)	Brazil (Type N)	BRAZIL	IEC 320/C5 2000	6.6	
6023592M5712(R)	China (Type I)	CCC GR2099	IEC 320/C5 2500	8	
23144262M0712(R)	Europe (Type E)	CEE 7/7	IEC 320/C5 2050	6.6	
2313K3432M0712(R)	Korea (Type F)	KS C 8305	IEC 320/C5 2000	6.6	
205IN4262M0712(R)	India (Type D)	India IS 1293 (also known as IA16A3 or BS546)	IEC320/C5 2000	6.6	
377C4262M0712(R)	Israel (Type H)	ISL	IEC320/C5 2050	6.7	
23024262M0712(R)	Italy (Type L)	CEI 23-16/VII	IEC 320/C5 2000	6.6	
3003316F0712(R)	Japan (Type B)	JIS 8303 / 3 PINS	IEC 320/C5 1830	6	
	Japan / USA	JIS 8303 / 3 PINS +			

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<https://www.globtek.com/ds/VBfa7C3yZLw/f9RgRYcCH5p.html>

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-43006-40VV-x.x-T3A

May 4, 2024

3021066F0712ULPSE(R)	(Type B)	NEMA 5-15P	IEC 320/C5 1830	6
2054262M0712(R)	S. Africa (Type D)	South Africa SABS164-1 (6A type plug)	IEC320/C5 2050	6.7
2084262M0712(R)	S.Africa (Type M)	South Africa SABS164-1 (16A type plug)	IEC 320/C5 2000	6.6
23214262M0712(R)	Switzerland (Type J)	SEV 1011 (EL 203)	IEC 320/C5 2000	6.6
3003316F0712(R)	Taiwan (Type B) BSMI		IEC 320/C5 2000	6.6
6104262M0712(R)	UK, Hong Kong, Singapore, Gulf States (Type G)	BS1363	IEC 320/C5 2000	6.6

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-43006-40VV-x.x-T3A

May 4, 2024

OUTPUT CONFIGURATION

Common output connector options:



L Type (Coaxial
5.5x2.5mm plug)



C Type (Coaxial
5.5x2.1mm plug)



K Type (Coaxial
3.5x1.3mm plug)



LL Type (5.5x2.5mm
Locking 760k type)



CL Type (5.5x2.1mm
Locking S761k type)



ML2 Type (Molex
housing 43025-0200)



YL3 Type
(KPPX-3P)



YL4 Type (KPPX-4P)



EJ1/2/3/4/5 (EIAJ
RC-5320A type
connectors)



MSB Type (Micro
USB)



USBC Type (USB
Type C)



Inquire for custom
design

For a comprehensive list of options, [click here](#)

Contact GlobTek for your specific requirements or custom solutions.

Model:GT-43006-40VV-x.x-T3A

May 4, 2024

Approvals

Logo	Description
No Logo	CB Report EN 60950-1:2005+A1+A2 (EN 60950-1:2006+A11+A1+A12+A2)
	CE Mark: tested to comply with EN55022:2006/A1:2007 Class B, EN610003-2, EN610003-3 including EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6N EN61000-4-11; EMI: Complies with EN55011 CLASS B and FCC Part 15B - On label or Molded in case
	CHINA SJ/T 11364-2014, China RoHS Chart: http://www.globtek.com/pdf/F-GT-DJD-8.4.1-006%20China%20RoHS%20Declaration%205-20-22.pdf
	UL60950-1, cULus to UL 60950-1, 2nd Edition, 2007-03-27 and CSA C22.2 No. 60950-1-07, 2nd Edition, 2007-03
No Logo	EC-Conformity Declaration: http://www.globtek.com/html/iso_certificates/EC-DECLARATION.pdf , REACH 144 SVHC: http://www.globtek.com/html/iso_certificates/Reach144.pdf
	GOST-R mark for Russia(Document: http://www.globtek.com/html/iso_certificates/GT_GOST-R.pdf). 03/15/2015. Due to lack of demand, GlobTek will not be renewing it's GOST certification. Please contact your sales engineer for pricing on EAC.
	Indoor Use Only - Mark is on the label or Molded in the case
IP40	Ingress Protection: ?IP40 to IEC60529:2001 Protection against granular foreign bodies
EFFICIENCY LEVEL 	Efficiency: complies to section 301 of Energy Independence and Security Act (EISA) complies with Energy Star tier 2 (North America), ECP tier 2 (China), MEPS tier 2 (Australia), Code of Conduct (Europe)
LPS	Limited Power Source 60950
 GlobTek, Inc.	JAPAN TUV Rheinland-PSE GlobTek Inc to J60950-1(H26) , J55022(H22),J3000(H25).Please follow the procedure listed in the following link for proper import to Japan: https://www.globtek.com/r2/Szj4Vb

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-43006-40VV-x.x-T3A

May 4, 2024

RoHS	Specifications of directive 2011/65/EU Annex VI (ROHS-2) with amendment 2015/863-EU (ROHS-3) http://www.ce-mark.com/Rohs%20final.pdf
	UKCA Certification
 10276	Ukraine UKRSepro (Document: www.globtek.com/html/iso_certificates/GT_Ukraine.pdf)
	Japan: Voluntary Control Council for Interference (VCCI)
	WEEE: Complies with EU 2012/19/EU (http://ec.europa.eu/environment/waste/weee/index_en.htm) Mark is on the label or Molded in the case