

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM41076-06VV-Q 2MOOP (EOL due to 260-00620001(R) IC FSQ110 DIP-8 FAIRCHILD)

May 11, 2025

GTM41076-06VV-Q 2MOOP (EOL due to 260-00620001(R) IC FSQ110 DIP-8 FAIRCHILD)

Information

Model Number	GTM41076-06VV-Q 2MOOP (EOL due to 260-00620001(R) IC FSQ110 DIP-8 FAIRCHILD)
Description	GTM41076-06VV-Q 2MOOP (EOL due to 260-00620001(R) IC FSQ110 DIP-8 FAIRCHILD), Medical Power Supply, 60601-1-4th Ed. , Wall Plug-in, Regulated Switchmode AC-DC Power Supply AC Adaptor, , Input Rating: 100-240V~, 50-60 Hz, Blade Options for Q Series Wall Plug-in Power Supplies, Output Rating: 6 Watts, Power rating with convection cooling (W) , 5-30V in 0.1V increments, Approvals: cUR; PSE; PSE; EAC; Taiwan BSMI; Ukraine; CE; PSE; CB 60601-1; China RoHS; WEEE; RoHS; Double Insulation; VCCI; Class 2; NrcAN; India BIS; RCM; CCC; Level V; IP40; SIQ; CE;
Model Picture	
Agency Documents	http://www.globtek.info/certs/GTM41076/
CE EC-Declaration	https://www.globtek.com/pdf/ec_declaration/a0Oa000000BzyHWEAZ
RoHS/RoHS2 Declaration	https://www.globtek.com/pdf/rohs_cert/a0Oa000000BzyHWEAZ
REACH Declaration	https://www.globtek.com/pdf/iso_certificates/REACH.pdf
Conflict Minerals Declaration	https://www.globtek.com/pdf/conflict-minerals.pdf

Delivering leading edge, innovative power solutions for more than 30 years....

Model: GTM41076-06VV-Q 2MOOP (EOL due to 260-00620001(R) IC FSQ110 DIP-8 FAIRCHILD)

May 11, 2025

MODEL PARAMETERS


Type	Wall Plug-in
Technology	Regulated Switchmode AC-DC Power Supply AC Adaptor
Category	Medical Power Supply
Input Voltage	100-240V~, 50-60 Hz
I/P Amps (A)	0.16A-0.1A
Wattage (W)	6.0
Vout Range (V)	5-30
Efficiency Level	IV
Ingress Protection	IP40 (IP52 Option Available)
Size (mm)	74*44*34

Delivering leading edge, innovative power solutions for more than 30 years....

Model: GTM41076-06VV-Q 2MOOP (EOL due to 260-00620001(R) IC FSQ110 DIP-8 FAIRCHILD)

May 11, 2025

ENCLOSURE

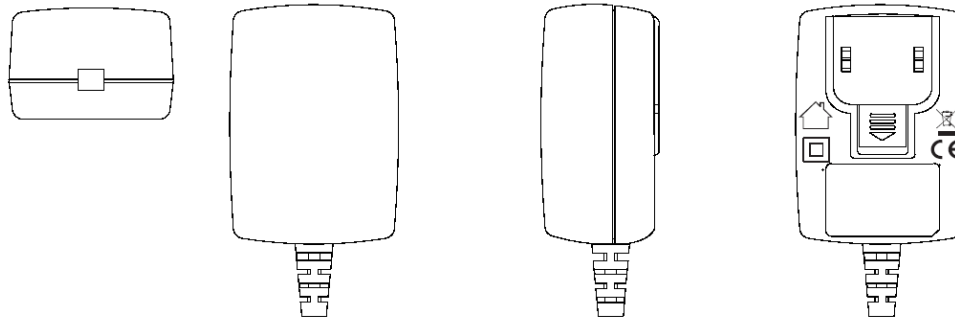

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM41076-06VV-Q 2MOOP (EOL due to 260-00620001(R) IC FSQ110 DIP-8 FAIRCHILD)

May 11, 2025

RATING TABLE

Model Number	Voltage	Amps(A)	Watts(W)	RFQ
GTM41076-0605	5 V	1.2	6.00	RFQ
GTM41076-0606	6 V	1	6.00	RFQ
GTM41076-0607	7 V	0.85	5.95	RFQ
GTM41076-0609-0.5	8.5 V	0.705	5.99	RFQ
GTM41076-0609	9 V	0.66	5.94	RFQ
GTM41076-0612	12 V	0.5	6.00	RFQ
GTM41076-0615	15 V	0.4	6.00	RFQ
GTM41076-0618	18 V	0.33	5.94	RFQ
GTM41076-0620	20 V	0.3	6.00	RFQ
GTM41076-0624	24 V	0.25	6.00	RFQ
GTM41076-0630	30 V	0.16	4.80	RFQ

SPECIFICATIONS

A) ELECTRICAL SPECIFICATIONS:

1. Input Voltage: Specified 90-264 Vac, Nameplate rated: 100-240Vac
2. Input Frequency: Specified 47-63 Hz, Nameplate rated 50-60Hz
3. Output Power (Rated): 6Watts maximum
4. Output Regulation: +/- 5% measured at the output connector
5. Line Voltage Regulation: +/- 1% typical measured at the output connector
6. Output Ripple (Vp-p): +/-1% or 150 mV whichever is greater at nominal output voltage. Measured at 20 MHz bandwidth with 0.1 uf ceramic capacitor in parallel with 10 uf electrolytic capacitor connected at the end of the output connector.
7. Turn-On/Turn-Off Overshoot: 5% maximum, 500us maximum recovery time for 25% step load.
8. Turn-On Delay: 3000mSEC maximum
9. Hold-Up Time: 8mSec maximum at nominal input and full load.
10. Inrush Current: 30A typical @ 115Vac input ; 60A typical @ 230Vac input
11. Switching Frequency: 66.5 KHz typical

B) PROTECTION

1. Over-Voltage: Protected unit will recover upon removal of fault
2. Short Circuit: Electronically Protected, unit will recover upon removal of fault
3. Input Protection: Input line fusing

C) SAFETY

1. Dielectric Withstand Voltage: 5656Vdc from primary to secondary
2. Earth Leakage Current: N/A for Class II units, there is no PE Ground pin, so Earth Leakage current is not measured
3. Touch Current: Maximum allowed values: 100uA NC(Normal condition) 500uA SFC(single fault condition)
4. Means of Protection: 2 x MOOP

D) OTHER:

1. MTBF: 200,000 hours @ 25°C ambient temperature
2. Operating Temperature: 0°C to 40°C ambient temperature
3. Humidity: 0% to 90% relative humidity
4. Storage Temperature: -40°C to 80°C

E) ENCLOSURE

1. Upper Housing: High impact plastic, 94V0 polycarbonate, non-vented
2. Lower Housing: High impact plastic, 94V0 polycarbonate, non-vented
3. Size: 43.5*74.0*35.3 +/-1.0 mm

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GTM41076-06VV-Q 2MOOP (EOL due to 260-00620001(R) IC FSQ110 DIP-8 FAIRCHILD)

May 11, 2025

DERATING CURVE

Model:GTM41076-06VV-Q 2MOOP (EOL due to 260-00620001(R) IC FSQ110 DIP-8 FAIRCHILD)


May 11, 2025

INPUT CONFIGURATION

Description Blade Options for Q Series Wall Plug-in Power Supplies

Data Sheet: <http://en.globtek.com/interchangeable-blades.php>

Insertion Instructions: <http://www.globtek.com/pdf/Instructions-Interchangeable-Blades.pdf>

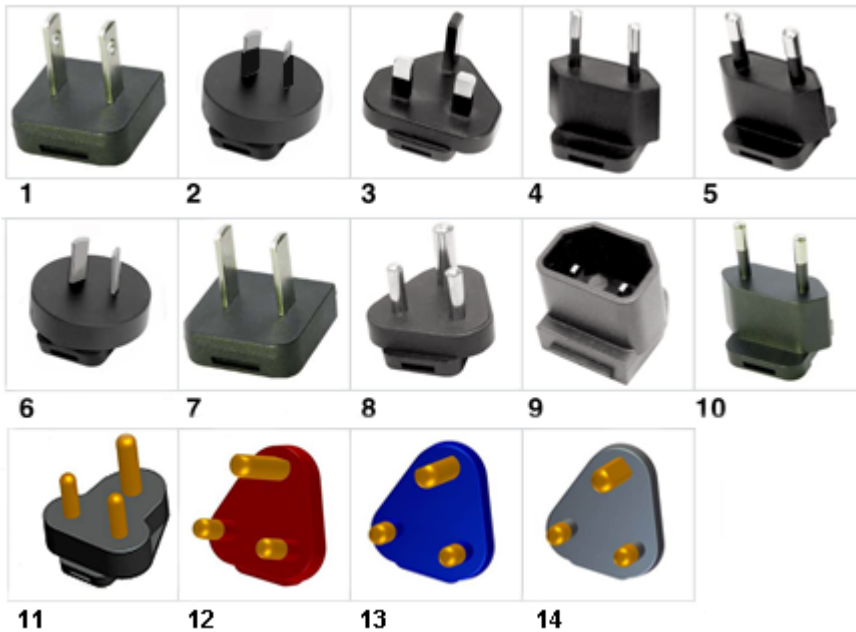Video: [Q-Blade Style Instruction Video](#)


INPUT CONNECTOR: Q-Socket (below are available blades configurations which are "not included" (unless stated above); can be purchased separately, package with power supply or as a separate "Q-KIT" if specified

01. United States / Canada / Japan NEMA 1-15P/ IEC PLUG Type A [WORKS IN PLUG B] configuration: NA 2 blades, Class II; US/CA/JP P/N: Q-NA(R)
02. Australian AS 3112 configuration: SAA 2 blade/ IEC TYPE I, Class II; AU P/N: Q-SAA(R)
03. UK BS 1363 configuration: UK 3 blade with dummy Ground/ IEC TYPE G, Class II; GB P/N: Q-UK(R)
04. European CEE 7/16 configuration: Europlug 2 pins/ IEC TYPE C [WORKS IN TYPE E&F], Class II; EU P/N: Q-EU(R)
05. Korean KS C8305 configuration: 2 pins/SIMILAR TO IEC TYPE C, Class II; KR P/N: Q-KR(R)
06. Argentina IRAM 2073 configuration: 2 blades/SIMILAR TO IEC TYPE I; AR P/N: Class II Q-AR(R)
07. China GB 2099 configuration: 2 blades/SIMILAR TO TYPE A, Class II; CN P/N: Q-CN(R)
08. India IS 1293 6A/BS546 configuration: 5A, 3 pins with Dummy Ground, Class II/IEC TYPE D; IN P/N: Q-IN(R)
09. IEC60320/C18 Inlet, Class II; P/N: Q-C18(R)
10. Brazilian NBR6147 configuration: 2 pins, Class II;SIMILAR TO IEC TYPE C BR P/N: Q-BR(R)
11. South Africa SABS164-1 and India IS 1293, IS694, 16A type plug, 3 round prongs, Class II + dummy ground, IEC TYPE M P/N: Q-SANS164-1-16A(R)
12. South Africa SABS164-4, 3 round prongs with a notched prong @ 0°, Class II + dummy ground, IEC TYPE M Red, P/N: Q-SANS164-4C-16A(R)

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<https://www.globtek.com/ds/jyUmnHxp3fA/WNNRHJUB7z4.html#datasheet>

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM41076-06VV-Q 2MOOP (EOL due to 260-00620001(R) IC FSQ110 DIP-8 FAIRCHILD)

May 11, 2025

13. South Africa SABS164-4, 3 round prongs with a notched prong @ -53°, Class II + dummy ground, Blue, IEC TYPE M,
P/N:

Q-SANS164-4L-16A(R)

14. South Africa SABS164-4, 3 round prongs with a notched prong @ +53°, Class II + dummy ground, Black,IEC TYPE M
P/N:

Q-SANS164-4R-16A(R)

Kits

01. Q-KIT: 1,2,3,4 above

02. Q-KIT-INTL: 2,3,4 above

03. Q-KIT-6: 1,2,3,4,5,6 above

04. Q-KIT-7: 1,2,3,4,5,6,7 above

05. Q-KIT-8: 1,2,3,4,5,6,7,8 above

Delivering leading edge, innovative power solutions for more than 30 years....

Model: GTM41076-06VV-Q 2MOOP (EOL due to 260-00620001(R) IC FSQ110 DIP-8 FAIRCHILD)

May 11, 2025

OUTPUT CONFIGURATION

Common output connector options:



L Type (Coaxial
5.5x2.5mm plug)



C Type (Coaxial
5.5x2.1mm plug)



K Type (Coaxial
3.5x1.3mm plug)



LL Type (5.5x2.5mm
Locking 760k type)



CL Type (5.5x2.1mm
Locking S761k type)



ML2 Type (Molex
housing 43025-0200)



YL3 Type
(KPPX-3P)



YL4 Type (KPPX-4P)



EJ1/2/3/4/5 (EIAJ
RC-5320A type
connectors)



MSB Type (Micro
USB)



USBC Type (USB
Type C)



Inquire for custom
design

For a comprehensive list of options, [click here](#)

Contact GlobTek for your specific requirements or custom solutions.

Model:GTM41076-06VV-Q 2MOOP (EOL due to 260-00620001(R) IC FSQ110 DIP-8 FAIRCHILD)

May 11, 2025

Approvals

Logo	Description
 R32282 RoHS	Taiwan BSMI GTM41076 R32282 7V, 12V,,24V http://www.bsmi.gov.tw/wSite/ct?xItem=4072&ctNode=816&mp=2
	Caution/Attention
No Logo Applicable	CB report IEC 60601-1: 2005 + CORR. 1 (2006) + CORR. 2 (2007) and or EN 60 Edition including 2MOOP requirements
 仅适用于海拔2000M以下地区使用	CCC to GB4943.1-2011, Tropical <2000
	CE Mark: tested to comply with EN61000-3-2, EN61000-3-3 and EN50082-1, inc EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, EN61000-4-8, EN610 EN61001-1-2-2007 EMI: Complies with EN55011 CLASS B and FCC Part 15 B
	Test standard: EN 60601-1-2: 2015
	CHINA SJ/T 11364-2014, China RoHS Chart: http://www.globtek.com/pdf/F-GT-DJD-8.4.1-006%20China%20RoHS%20Declar
CLASS 2 POWER SUPPLY	CLASS 2 POWER SUPPLY Text
	ANSI/AAMI ES60601-1: A1:2012, C1:2009/(R)2012 and A2:2010/(R)2012, CSA NO. 60601-1:14
	

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM41076-06VV-Q 2MOOP (EOL due to 260-00620001(R) IC FSQ110 DIP-8 FAIRCHILD)

May 11, 2025

	Certification # TC RU AR46.B.69004 Custom Union of Russia, Belarus and Kaza
IS 13252 (Part 1) IEC 60950-1  R-41017175 www.bis.gov.in	Bureau Of Indian Standards for GTM41076-0605(5V only)
	Indoor Use Only - Mark is on the label or Molded in the case
IP40	Ingress Protection: ?IP40 to IEC60529:2001 Protection against granular foreign bodies (with I/P cord)
 GlobTek, Inc.	JAPAN TUV R-PSE, Cert. No. JD 50471624, to J62368-1(H30) , J55032(H29),J3 less]. Please reference the following website for guidelines on PSE regulations: https://www.globtek.com/r2/Szj4Vb
 GlobTek, Inc.	JAPAN TUV R-PSE, Cert. No. JD 50471624 J62368-1(H30) , J55032(H29),J3000(H25),[DC15V?30V]. Please reference the following website PSE regulations: https://www.globtek.com/r2/Szj4Vb
 GlobTek, Inc.	JAPAN TUV R-PSE, Cert. No. JD 50471624, to J62368-1(H30) , J55032(H29),J3000(H25),[DC30V?60V]. Please reference the following website PSE regulations: https://www.globtek.com/r2/Szj4Vb
EFFICIENCY LEVEL 	Efficiency: complies to section 301 of Energy Independence and Security Act (EI Energy Star tier 2 (North America), ECP tier 2 (China), MEPS tier 2 (Australia), C (Europe)
MEDICAL POWER SUPPLY	MEDICAL POWER SUPPLY Text
 EEV1191	Natural Resources Canada (NRCAN): CSA Standard C381.1-08, QSP NRCAN E http://shop.csa.ca/en/canada/energy-efficiency/canca-c3811-08/invl/270248020

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM41076-06VV-Q 2MOOP (EOL due to 260-00620001(R) IC FSQ110 DIP-8 FAIRCHILD)

May 11, 2025

	Australia and New Zealand Regulatory Compliance, Mark (http://rcm.standards.org.au/rcmfaq/rcmfaq.htm)
RoHS	Specifications of directive 2011/65/EU Annex VI (ROHS-2) with amendment 2015 http://www.ce-mark.com/Rohs%20final.pdf
	IEC 60601-1:2005 (Third Edition) + CORR. 1:2006 + CORR. 2:2007 + A1:2012 (or IEC 60601-1: 2012 reprint)
	Ukraine UKRSepro (Document: www.globtek.com/html/iso_certificates/GT_Ukraine.htm)
	Japan: Voluntary Control Council for Interference (VCCI)
	WEEE: Complies with EU 2012/19/EU (http://ec.europa.eu/environment/waste/wEEE/) Mark is on the label or Molded in the case