

Model:GTM21097-WWVV-T2

May 4, 2024

GTM21097-WWVV-T2

Information

Model Number	GTM21097-WWVV-T2
Description	GTM21097-WWVV-T2, Medical Power Supply, Desktop/External, Regulated Switchmode AC-DC Power Supply AC Adaptor, , Input Rating: 100-240V~, 50-60 Hz, IEC 60320/C8 AC Inlet connector, Class II, Non-Earth Ground (aka "Figure-8"), Output Rating: 50 Watts, Power rating with convection cooling (W) , 3.3-48V in 0.1V increments, Approvals: UKCA; CE; Double Insulation; GOST-R; PSE; RoHS; Ukraine; VCCI; WEEE; cRUus; IP42; China RoHS; Book 60601; CB 60601-1; FCC; SIQ; Korea (12V Only);

Model Picture



Agency Documents	http://www.globtek.info/certs/GTM21097/
CE EC-Declaration	https://www.globtek.com/pdf/ec_declaration/a0Oa000000C2iESEAZ
RoHS/RoHS2 Declaration	https://www.globtek.com/pdf/rohs_cert/a0Oa000000C2iESEAZ
REACH Declaration	https://www.globtek.com/pdf/iso_certificates/REACH.pdf
Conflict Minerals Declaration	https://www.globtek.com/pdf/conflict-minerals.pdf

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GTM21097-WWVV-T2

May 4, 2024

MODEL PARAMETERS


Type	Desktop/External
Technology	Regulated Switchmode AC-DC Power Supply AC Adaptor
Category	Medical Power Supply
Input Voltage	100-240V~, 50-60 Hz
I/P Amps (A)	1.6A
Wattage (W)	50.0
Vout Range (V)	3.3-48
Efficiency Level	Meets/Exceeds for Medical
Ingress Protection	IP40
Size (mm)	

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM21097-WWVV-T2

May 4, 2024

ENCLOSURE

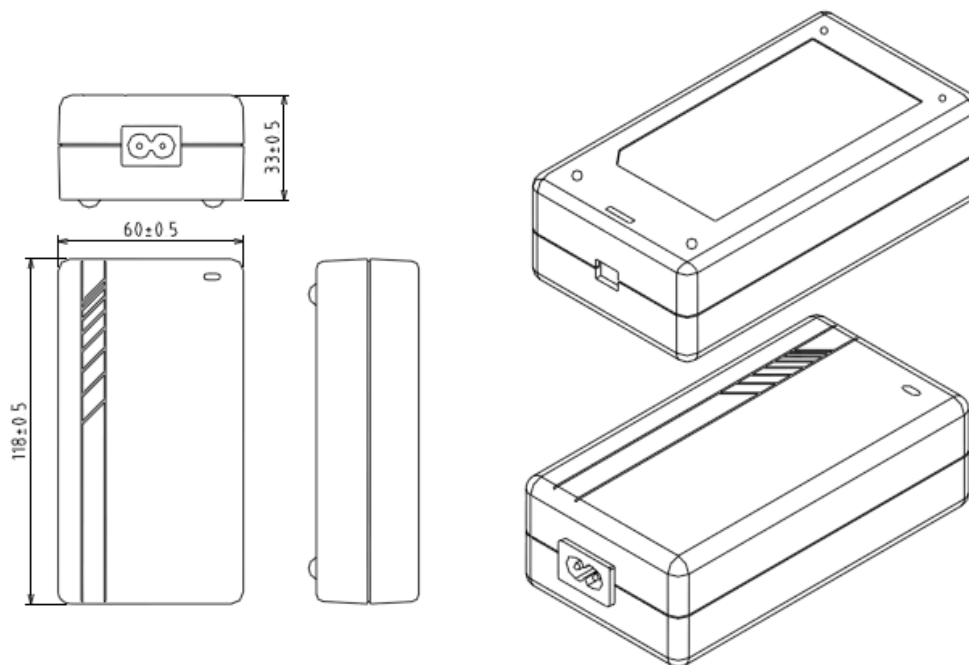

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GTM21097-WWVV-T2

May 4, 2024

RATING TABLE

Model Number	Voltage	Amps(A)	Watts(W)	RFQ
a17a000000LICsC	V			RFQ
GTM21097-5024-4.0-T2	20 V	2.5	50.00	RFQ

Model:GTM21097-WWVV-T2

May 4, 2024

SPECIFICATIONS

A) ELECTRICAL SPECIFICATIONS:

1. Input Voltage: Specified 90-264 Vac, Nameplate rated: 100-240Vac
2. Input Frequency: Specified 47-63 Hz, Nameplate rated 50-60Hz
3. Output Regulation: +/- 5% measured at the output connector
4. Line Voltage Regulation: +/- 1% typical measures at full load
5. Output Ripple (Vp-p): 1% of output voltage typical measured at 20 MHz bandwidth with 0.1 uf ceramic capacitor in parallel with 10 uf electrolytic capacitor connected at the end of output connector at nominal line
6. Turn-On/Turn-Off Overshoot: 5% maximum, mS typical recovery time for 25% step load
7. Turn-On Delay: 1 S second typical
8. Hold-Up Time: 10mS typical @ nominal input voltage & full load
9. Inrush Current: 20A typical @ 115Vac input ; 30A typical @ 230Vac input
10. Switching Frequency: 100 KHz typical

B) PROTECTION

1. Over-Voltage: Voltage limited by crowbar unit will recover upon removal of fault
2. Short Circuit: Hiccup, unit will recover upon removal of fault
3. Input Protection: Input line & neutral fusing

C) SAFETY

1. Dielectric Withstand Voltage: 4242Vdc (2xMOOP)
from primary to secondary
2. Earth Leakage Current: N/A for Class II units, there is no PE Ground pin, so Earth Leakage current is not measured
3. Touch Current: Maximum allowed values: 100uA NC(Normal condition) 500uA SFC(single fault condition)

D) OTHER:

1. MTBF: 200,000 hours @ 25°C ambient temperature
2. Operating Temperature: 0°C to 40°C ambient temperature
3. Humidity: 0% to 90% relative humidity
4. Storage Temperature: -10°C to 80°C
5. Ingress Protection: IP40

E) ENCLOSURE


1. Upper Housing: High impact plastic, 94V0 polycarbonate, non-vented
2. Lower Housing: High impact plastic, 94V0 polycarbonate, non-vented
3. Size: 118*60*33 + 0.5 mm +/-1.0
4. Green LED to indicate Power On

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM21097-WWVV-T2

May 4, 2024

DERATING CURVE

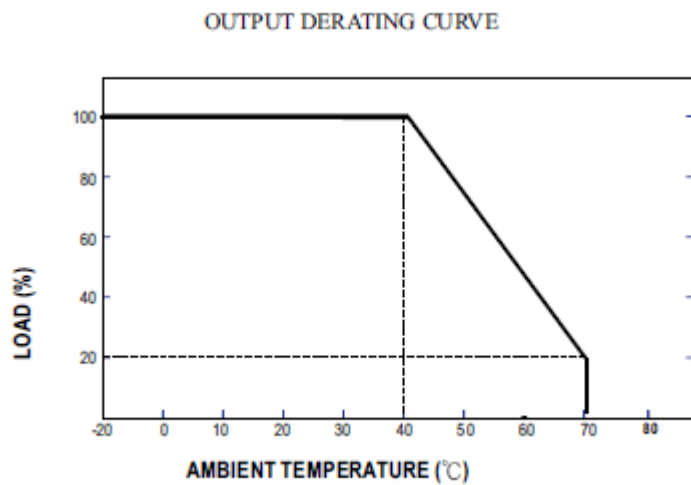


Model:GTM21097-WWVV-T2

May 4, 2024

INPUT CONFIGURATION

Description IEC 60320/C8 AC Inlet connector, Class II, Non-Earth Ground (aka "Figure-8")

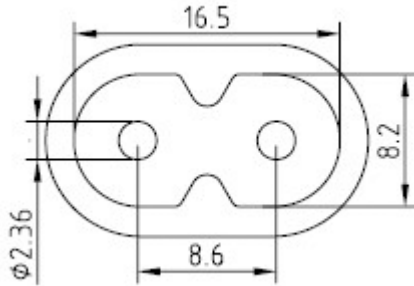

Mates with IEC 60320/C7 Plug

Below are standard cordsets which are "not included" (unless stated above); these may be purchased separately or packaged with the power supply. Please contact your Sales Engineer if the style required is not shown below. Many more available in different lengths, colors or cable material.

Standard International IEC 320/C7 Cordsets

Part Number	Type	Standard	Connector	Length (mm)	Length (feet)
2094112M703(R)	Argentina (Type I)	IRAM 2063	IEC 320/C7	2000	7
5014112M703A(R)	Australian (Type I)	AS 3112	IEC 320/C7	2000	7
207B4111M8703(R)	Brazil (Type N)	NBR14136	IEC 320/C7	1800	6
4533501M8703(R)	China (Type A)	GB 2099.1	IEC 320/C7	1830	6
2074112M703A(R)	European (Type C)	CEE 7/16	IEC 320/C7	2000	7
2074112M703AEUSA(R)	European/South Africa Combo(Type C)	CEE 7/16	IEC 320/C7	2000	7
2084111M8703B(R)	India (Type D)	IS 1293	IEC 320/C7	1800	6
451J3401M8703(R)	Japan (Type A)	JIS 8303	IEC 320/C7	1830	6
2044112M703A(R)	Korea (Type C)	KS C8305	IEC 320/C7	2000	7
4511116F703A(R)	North America (Type A)	NEMA 1-15P	IEC 320/C7	1830	6
2084111M8703(R)	South Africa (Type M)	BS 546	IEC320/C7	1830	6
4033401M8703A(R)	Taiwan (Type A)	CNS690	IEC 320/C7	1830	6
6104112M703A(R)	UK, Hong Kong, Singapore, Gulf States (Type G)	BS1363	IEC 320/C7	2000	7

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<https://www.globtek.com/ds/FJ94K65BHVX/YzhyYX7UTVe.html>

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GTM21097-WWVV-T2

May 4, 2024

451G1116F703A(R)	Gulf States (Kuwait, Bahrain, Oman, Qatar, Saudi Arabia, Yemen and the United Arab Emirates (UAE)(Type A)	Nema 1-15P	IEC320/C7	1830	6
6303742M5703(R)	Thailand (Type C)	TIS 166-2549	IEC320/C7	2500	8

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM21097-WWVV-T2

May 4, 2024

OUTPUT CONFIGURATION

Common output connector options:



L Type (Coaxial
5.5x2.5mm plug)



C Type (Coaxial
5.5x2.1mm plug)



K Type (Coaxial
3.5x1.3mm plug)



LL Type (5.5x2.5mm
Locking 760k type)



CL Type (5.5x2.1mm
Locking S761k type)



ML2 Type (Molex
housing 43025-0200)



YL3 Type
(KPPX-3P)



YL4 Type (KPPX-4P)



EJ1/2/3/4/5 (EIAJ
RC-5320A type
connectors)



MSB Type (Micro
USB)



USBC Type (USB
Type C)



Inquire for custom
design

For a comprehensive list of options, [click here](#)

Contact GlobTek for your specific requirements or custom solutions.

Model:GTM21097-WWVV-T2

May 4, 2024

Approvals

Logo	Description
	60601-1 3rd Operating Instructions
No Logo Applicable	CB report IEC 60601-1: 2005 + CORR. 1 (2006) + CORR. 2 (2007) and or EN 60601-1:2006 3rd Edition including 2MOOP requirements
	CE Mark: tested to comply with EN61000-3-2, EN61000-3-3 and EN50082-1, including EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, EN61000-4-8, EN61000-4-11, EN61001-1-2-2007 EMI: Complies with EN55011 CLASS B and FCC Part 15 B
	CHINA SJ/T 11364-2014, China RoHS Chart: http://www.globtek.com/pdf/F-GT-DJD-8.4.1-006%20China%20RoHS%20Declaration%205-20-22.pdf
	cRUus UL Recognized Component E172861 3rd Edition w-RM ANSI-AAMI ES60601-1 (2005 + C1:09 + A2:10) and CAN-CSA-C22.2 No. 60601-1 (2008)
	
	FCC PART 15 CLASS B
	GOST-R mark for Russia(Document: http://www.globtek.com/html/iso_certificates/GT_GOST-R.pdf). 03/15/2015. Due to lack of demand, GlobTek will not be renewing it's GOST certification. Please contact your sales engineer for pricing on EAC.
	Indoor Use Only - Mark is on the label or Molded in the case
IP42	Ingress Protection: ?IP42 to IEC60529:2001 Protection against granular foreign bodies - Protected against direct sprays up to 15o from the vertical Optional
 GlobTek, Inc.	JAPAN TUV R-PSE, Cert. No. JD 50469658, to J62368-1(H30) , J55032(H29),J3000(H25)[15V or less]. Please reference the following website for guidelines on PSE regulations: https://www.globtek.com/r2/Szj4Vb

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM21097-WWVV-T2

May 4, 2024

 직류전원장치 AC/DC ADAPTER KTC HU1004-7022B 모델명:GTM21097-5012 Mfr Name: GLOBTEK (SUZHOU) CO.,LTD A/S Center: 10-6221-6100	Korea KET KC Mark GTM21097-5012 HU10040-7022B (12V Only)
RoHS	Specifications of directive 2011/65/EU Annex VI (ROHS-2) with amendment 2015/863-EU (ROHS-3) http://www.ce-mark.com/Rohs%20final.pdf
 RoHS Symbol Serial NO. YEAR WEEK Class NO for production	Serial Number Information
 IEC/EN60601-1	SIQ Mark License EN60601-1
	UKCA Certification
 10276	Ukraine UKRSepro (Document: www.globtek.com/html/iso_certificates/GT_Ukraine.pdf)
	Japan: Voluntary Control Council for Interference (VCCI)
	WEEE: Complies with EU 2012/19/EU (http://ec.europa.eu/environment/waste/weee/index_en.htm) Mark is on the label or Molded in the case