

Model:GT-96600-7056-T3-SP

May 11, 2025

GT-96600-7056-T3-SP

Information

Model Number	GT-96600-7056-T3-SP
Description	GT-96600-7056-T3-SP, ICT/ITE Power Supply, Desktop/External, Single Port Passive Power Over Ethernet Midspan (Passive/Dumb PoE PSE) Power Supply AC Adaptor, , Input Rating: 100-240V~, 50-60 Hz, IEC 60320/C14 AC Inlet Connector, Class I, Earth Ground, Output Rating: 70 Watts, Power rating with convection cooling (W) , 56V in 0.1V increments, Approvals: ETL; EAC; South Africa; UKCA; Morocco; South Africa; ETL 62368; CB 62368; CE; China RoHS; Class I; Level VI; RoHS; Ukraine; VCCI; WEEE; EAC;
Model Picture	
Agency Documents	http://www.globtek.info/certs/GT-96600/
CE EC-Declaration	https://www.globtek.com/pdf/ec_declaration/a0Oa000000FkH0bEAF
RoHS/RoHS2 Declaration	https://www.globtek.com/pdf/rohs_cert/a0Oa000000FkH0bEAF
REACH Declaration	https://www.globtek.com/pdf/iso_certificates/REACH.pdf
Conflict Minerals Declaration	https://www.globtek.com/pdf/conflict-minerals.pdf

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-96600-7056-T3-SP

May 11, 2025

MODEL PARAMETERS

Type	Desktop/External
Technology	Single Port Passive Power Over Ethernet Midspan (Passive/Dumb PoE PSE) Power Supply AC Adaptor
Category	ICT/ITE Power Supply
Input Voltage	100-240V~, 50-60 Hz
I/P Amps (A)	2.0A
Wattage (W)	70.0
Vout Range (V)	56
Efficiency Level	USA DOE Level VI / Eco-design Directive 2009/125/EC, (EU) 2019/1782
Ingress Protection	
Size (mm)	165*32.5*56.5 mm

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.


<https://www.globtek.com/ds/dKMgC4WGp8q/534KvcL7JVj.html#datasheet>

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-96600-7056-T3-SP

May 11, 2025

ENCLOSURE

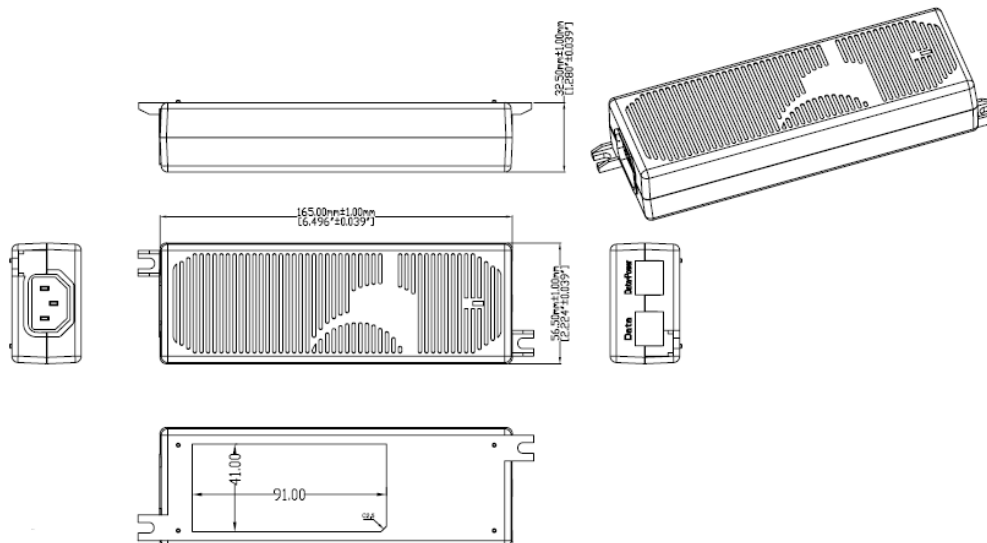

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-96600-7056-T3-SP

May 11, 2025

70W PoE Injector, Ethernet InterOperability and Compatibility Testing

Injector tested: *Model GT-96600-7056*, rated 70W output, 56Vdc, IEEE802.3-2012 Compliant

Note, assuming 80% eff splitter, max Pout = 56W (56/70 = 0.8)

Splitter Model	Splitter Description	P/F	Notes:
Globtek GT-91087	5V, af Type	P	Low power type, tested at 7.5W load
PowerDSIne PD-AS-601/5	5V, af Type	P	
Linksys POEES5	5V, af Type	P	
Axis 5008-001-02	5V, af Type	P	
PowerDSIne PD-AS-701/12	12V, af type	P	24W rating, tested at 24W load
Phihong POE21-120-R	12V, at type	P	21W rating, tested at 21W load
PowerDSIne PD-AS-951/12-24	12V, DLL Classification	P	4 Pair, 54W rating, tested at 48W load
Phihong POE45-120-R	12V, 12.5K Classification	P	4 Pair, 45W rating, tested at 40W load
Hi-Power PS-1206G	12V, MSC201 Classifica.	P	4 Pair, 51W rating, tested at 48W load

100BaseT/1000 Base T network digital transmission testing

(During testing ethernet communications is passed thru Injector and then Splitter and then to a computer)

Injector tested: *Model GT-96600-7056*, rated 70W output, 56Vdc, IEEE802.3-2012 Compliant

Injector is Gigabit designed and tested, to 100 Base T and 1000 Base T

Splitter Model	Splitter Description	P/F	Notes:
Axis 5008-001-02	100 Base T rating	P	Limited bandwidth splitter
PowerDSIne PD-AS-701/12	1000 Base T rating	P	Full bandwidth splitter

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-96600-7056-T3-SP

May 11, 2025

RATING TABLE

Model Number	Voltage	Amps(A)	Watts(W)	RFQ
--------------	---------	---------	----------	-----

Model:GT-96600-7056-T3-SP

May 11, 2025

SPECIFICATIONS

GlobTek's GT-96600-7056 Power over Ethernet Midspan Injector offers cost effective and reliable solution for remote powering of ethernet appliances up to 70 Watts over existing network infrastructure. GlobTek PoE Midspan Injector is configured to provide 70 watts of power over four pairs in per the IEEE 802.3 -2012 standard. When the load device is connected, GlobTek's Passive PoE Midspan will immediately source power to the Powered Device. GlobTek's 56V Passive PoE Injector is designed to function with and provide power to any device.

MAIN FEATURES

- Cost Effective Passive PoE, supplies continuous power without requiring handshaking communications
- Passive PoE models can transfer 10/100/1000 BaseT Data Rates (Gigabit compatible)
- Simple PoE models can transfer 10/100 BaseT Data Rates
- Green Design: Compliant to DoE Efficiency level VI requirement
- Universal Input Power from 100Vac to 240Vac
- Full Protection for Over Voltage and Current
- Compact 164 x 55 x 35 mm
- LED User Interface to show output power availability

APPLICATIONS

- High Power use, PoE powered equipment
- VoIP Phone with Video
- Wireless Access Points
- Bluetooth Access Points
- Multi-Band Wireless Access Points
- Network Security Cameras
- Point of Sales
- Industrial Controllers
- Electronic Time Card Readers
- Building Security Systems
- Network Camera with Pan, Tilt and Zoom Features
- Electronic Signs
- RFID Readers
- Motion Sensors
- HVAC Controllers
- Magnetic Card Readers
- PDAs
- Digital Time clock

A) ELECTRICAL SPECIFICATIONS:

INPUT

Input Range: 90-264 Vac (85-264Vac rating @ 85% of rated output power)

Input Line Frequency: 47-63Hz

Input Current:< 2A RMS @ 90Vac Full Load

Inrush Current: 30A max, Cold Start @ 25°C at 230Vac

No load Power: < 210mW

Efficiency: >88%, 4 Point Avg efficiency.

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<https://www.globtek.com/ds/dKMgC4WGp8q/534Kvcl7JVj.html#datasheet>

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-96600-7056-T3-SP

May 11, 2025

Turn on-delay: 1 Second Typical @ 115Vac
Input Line Surge/Lightning Protection: 10mm dia, 300Vac MOV protected, 3500A pk current rated
Hold-up time: 8ms typical at nominal input voltage and full load
Leakage current: <100uA
Isolation: 3000 VAC

OUTPUT

Power Injection Pins
Channel 1: 4&5 for V+ and 7&8 for V-
Channel 2: 3&6 for V+ and 1&2 for V-
Output Voltage: 56V
Output Power: 70W Max
Output Voltage Regulation: +/-3%, and less than 57Vdc
Output Voltage Ripple: 100mVpp max
Output Line Lighting Protection: 2X SMAJ58A Transient Surge Protection, per 802.3 standard

ENVIRONMENTAL

Temperature: Operating, -10C to 40C
Storage, -30C to 80C
Humidity: 0% to 95% Relative Humidity, Non-Condensing
Altitude: Operating, Up to 5000M

MECHANICALS

Dimensions: 164 x 55 x 35 mm
Weight: 0.59 lb, 264 gr.
AC Input Connector: IEC 320 Inlet, C14, C8, C6 or C18 Style
Data and Data+Power Connector: Fully Shielded RJ45

EMISSIONS and IMMUNITY

Emission: Designed to meet FCC Class B Part 15, EN55022 Class B
Immunity: Designed to meet the following;
EN 61000-4-2 ESD
EN 61000-4-3 Radiated Immunity
EN 61000-4-4 EFT
EN 61000-4-5 Surge
EN 61000-4-6 Conducted Susceptibility
EN 61000-4-11 Voltage Dips and Interrupts
EN 61000-3-2 Harmonics, Class A

SAFETY APPROVALS

Safety UL/cUL 60950-1, EN 60950-1, CE

INTEROPERABILITY: Passive and Simple 48V and 56V models work with all types of AF and AT Splitters and PoE appliances with appropriate input power requirements

SPECIAL OPTIONS

1. Custom Markings
2. Reduced output power rating

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<https://www.globtek.com/ds/dKMgC4WGp8q/534KvCL7JVj.html#datasheet>

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-96600-7056-T3-SP

May 11, 2025


- 3. High Rel PCB laminate with Plated through Holes for IPC610 Class 2 Compliance
 - 4. Special Housing Colors
-

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-96600-7056-T3-SP

May 11, 2025

DERATING CURVE

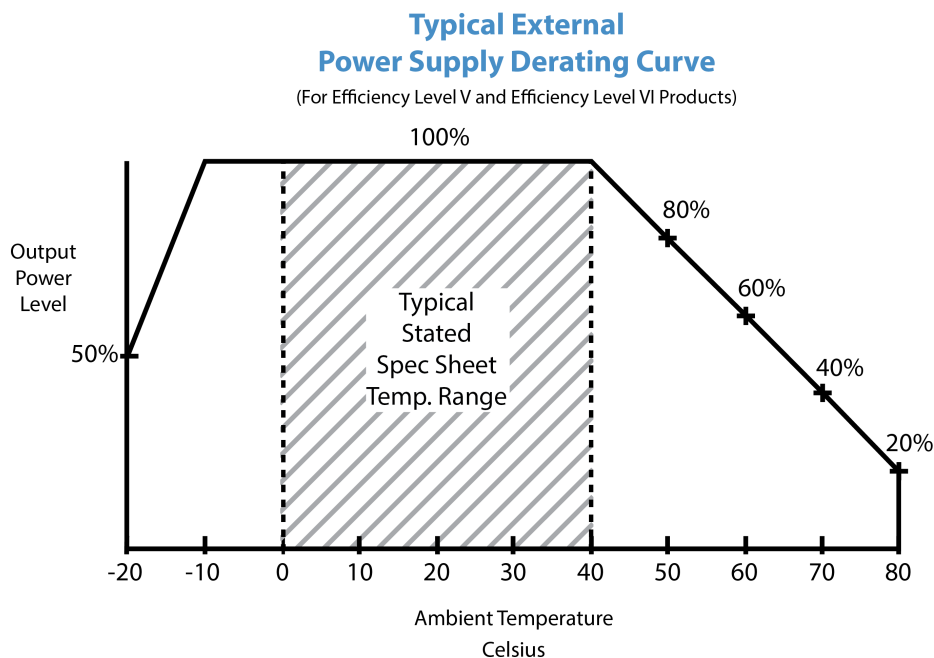


Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-96600-7056-T3-SP

May 11, 2025

INPUT CONFIGURATION

Description IEC 60320/C14 AC Inlet Connector, Class I, Earth Ground



Mates with IEC 60320/C13 Plug

Optional Locking IEC60320 Receptacle and cord option available on some models by request.:



[Standard International IEC 320/C13 Cordsets](#)

Below are standard cordsets which are "not included" (unless stated above); these can be purchased separately or packaged with the power supply. Contact your Sales Engineer if the style required is not shown below. Many more available in different lengths, colors or cable material.

Stock Power Supply Cords

Part Number/ Link	Country	Plug	Termination	Length (mm)	(Ft)
3021457F701(R)	N. American (Type B)	NEMA 5-15P	IEC 320/C13	2150	7
1191068F0701(R)	N. American (Type B)	NEMA 5-15P Hospital	IEC 320/C13	2459	8
2194272M5701-T(R)	Argentina (Type I)	IRAM 2073	IEC 320/C13	2500	8
5502022M5701A(R)	Australian (Type I)	AS3112 / 3 PRONG	IEC 320/C13	2500	8
204B4272M5701(R)	Brazil (Type N)	BRAZIL	IEC 320/C13	2500	8
6023602M5701(R)	China (Type I)	CCC GR2099	IEC 320/C13	2500	8
G8014272M5701(R)	Danish (Type K)	AFSNIT SECTION 107-2-D1	IEC 320/C13	2500	8
23144272M5701-T(R)	Europe (Type E)	CEE 7/7	IEC 320/C13	2500	8
23134272M5701EUKR(R)	Europe/Korea Combo (Type E)	CEE 7/7 / KSC8305	IEC 320/C13	2500	8
205IN4272M5701(R)	India (Type D)	India IS 1293 (also known as IA16A3 or BS546)	IEC 320/C13	2500	8

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<https://www.globtek.com/ds/dKMgC4WGp8q/534KvCL7JVj.html#datasheet>

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-96600-7056-T3-SP

May 11, 2025

208IN4272M5701(R)	India (Type M)	India IS 1293 (also known as IA16A3 or BS546)	IEC320/C13	2500	8
377C4272M5701(R)	Israel (Type H)	ISL 377C	IEC 320/C13	2500	8
23024272M5701(R)	Italy (Type L)	CEI 23-16/VII	IEC 320/C13	2500	8
3003339F701(R) [3x1.25mm2]	Japan (Type B)	JIS 8303 / 3 PINS	IEC 320/C13	2500	8
3003068F2701-HK(R) [3 x 2.0mm2]					
302J115J6F0701J(R)	North America / Japan (Type B – 12A)	NEMA 5-15P (cULus approved), Japan JIS C 8303 (PSE Approved)	IEC 320/C13	1830	6
302J104J6F0701J(R)	North America / Japan (Type B – 15A)	NEMA 5-15P (cULus approved), Japan JIS C 8303 (PSE Approved)	IEC 320/C13	1830	6
302JT104J9F0701JT(R)	North America / Japan / Taiwan (Type B – 15A)	NEMA 5-15P (cULus approved), Japan JIS C 8303 (PSE Approved), Taiwan CNS 6797 (BSMI Approved)	IEC 320/C13	2800	9
2313K3432M5701(R)	Korea (Type F)	KS C 8305	IEC 320/C13	2500	8
5804272M5701(R)	Russia (Type F)	GOST 7396	IEC 320/C13	2500	8
2084272M5701(R)	South Africa (Type M)	South Africa SABS164-1 (16A type)	IEC 320/C13	2500	8
23214272M5701(R)	Switzerland (Type J)	SEV 1011	IEC 320/C13	2500	8
3003322M5701(R)	Taiwan (Type B)	BSMI	IEC 320/C13	2500	8
6363762M5701(R)	Thailand (Type O)	TIS 166-2549	IEC 320/C13	2500	8
PZ0800100-2M5BK13H(R)	UK, Hong Kong, Singapore, Gulf States (Type G)	BS 1363A	IEC 320/C13	2500	8
7055002M5701A(R)	International	IEC 320 C14-C13	IEC 320/C13	2500	8

Model:GT-96600-7056-T3-SP

May 11, 2025

Approvals

Logo	Description
No Logo Applicable	CB for IEC 62368-1:2014 (Second Edition)
	CE Certification
	Audio/Video, Information And Communication Technology Equipment - Part 1: Safety Requirements [UL 62368-1:2014 Ed.2] Audio/Video, Information And Communication Technology Equipment - Part 1: Safety Requirements [CSA C22.2#62368-1:2014 Ed.2]
	CHINA SJ/T 11364-2014, China RoHS Chart: http://www.globtek.com/pdf/F-GT-DJD-8.4.1-006%20China%20RoHS%20Declaration%205-20-22.pdf
	Certification # TC RU C-US.AR46.B.79113 Custom Union of Russia, Belarus and Kazakhstan
	Declaration ДС № EAЭC N RU Д-US.KA01.B.10453_19 Custom Union of Russia, Belarus and Kazakhstan http://www.globtek.com/redirect/?loc=gost-certificate-eac-declaration
	Information Technology Equipment Safety Part 1: General Requirements >Valid without technical revision:01Jan2022< [UL 60950-1:2007 Ed.2 +R:14Oct2014
EFFICIENCY LEVEL 	Efficiency: complies to section 301 of Energy Independence and Security Act (EISA) complies with Energy Star tier 2 (North America), ECP tier 2 (China), MEPS tier 2 (Australia), Code of Conduct (Europe)

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-96600-7056-T3-SP

May 11, 2025

	Morocco SDoC declaration http://www.globtek.info/certs/Morocco%20SDoC%20Declaration/
RoHS	Specifications of directive 2011/65/EU Annex VI (ROHS-2) with amendment 2015/863-EU (ROHS-3) http://www.ce-mark.com/Rohs%20final.pdf
No Logo	12
No Logo	South Africa approval to SANS IEC 60950
	UKCA Certification
	Ukraine UKRSepro (Document: www.globtek.com/html/iso_certificates/GT_Ukraine.pdf)
	Japan: Voluntary Control Council for Interference (VCCI)
	WEEE: Complies with EU 2012/19/EU (http://ec.europa.eu/environment/waste/weee/index_en.htm) Mark is on the label or Molded in the case