

Model:GTM41134-Q(CC)

May 5, 2024

Constant Current Wall Plug in Power Supply Battery Charger, 6W, with 3.3 to 48VDC output options. Medical IEC60601-1, ITE IEC60950-1, and Household IEC60335 certified.

Information

Model Number	GTM41134-Q(CC)
Description	The Constant Current Wall Plug in Power Supply is ideal for use as a Battery Charger or LED driver, It's available in 6W, with 3.3 to 48VDC output options. It is rated Medical IEC60601-1, ITE IEC60950-1, and Household IEC60335 certified.

Model Picture



Agency Documents	http://www.globtek.info/certs/GTM41134/
CE EC-Declaration	https://www.globtek.com/pdf/ec_declaration/a0Oa000000HSwmXEAT
RoHS/RoHS2 Declaration	https://www.globtek.com/pdf/rohs_cert/a0Oa000000HSwmXEAT
REACH Declaration	https://www.globtek.com/pdf/iso_certificates/REACH.pdf
Conflict Minerals Declaration	https://www.globtek.com/pdf/conflict-minerals.pdf

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM41134-Q(CC)

May 5, 2024

MODEL PARAMETERS


Type	Wall Plug-in
Technology	Regulated Switchmode AC-DC Constant Current (CC) Power Supply AC Adaptor
Category	Medical Power Supply
Input Voltage	100-240V~, 50-60 Hz
I/P Amps (A)	0.6 A
Wattage (W)	6.0
Vout Range (V)	3.3-48
Efficiency Level	V
Ingress Protection	IP40
Size (mm)	43.5*74.0*35.3

Delivering leading edge, innovative power solutions for more than 30 years....

Model: GTM41134-Q(CC)


May 5, 2024

ENCLOSURE

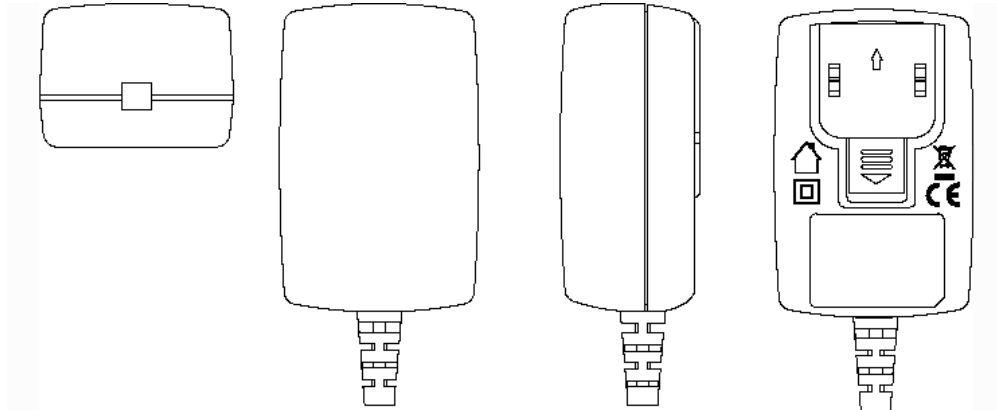

LED INDICATOR: LED INDICATOR AVAILABLE UPON REQUEST. GREEN INDICATES POWER PRESENT.

OUTPUT VOLTAGE AND CURRENT CHARACTERISTIC
FOR CONSTANT CURRENT (CC) VERSION

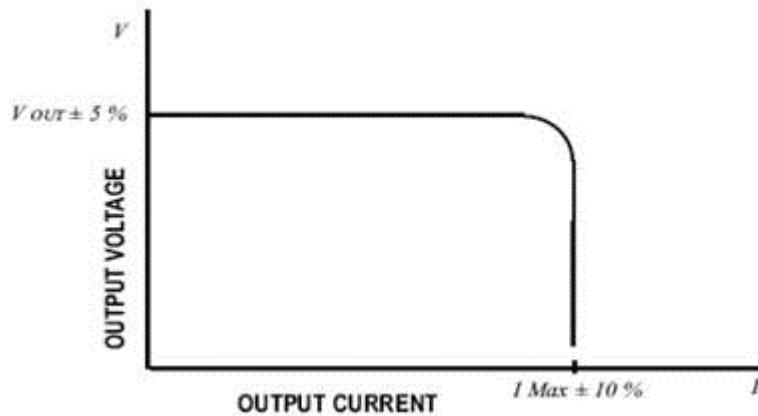

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM41134-Q(CC)

May 5, 2024

RATING TABLE

Model Number	Voltage	Amps(A)	Watts(W)	RFQ
a17a000000LICtA	V			RFQ
GTM41134CC-0603	3.3 V	1.8	5.94	RFQ
GTM41134CC-0604	4 V	1.5	6.00	RFQ
GTM41134CC-0606-1.0	5 V	1.2	6.00	RFQ
GTM41134CC0606-1.0	5 V	1.2	6.00	RFQ
GTM41134CC-0606	6 V	1	6.00	RFQ
GTM41134CC-0612	12 V	0.5	6.00	RFQ
GTM41134CC-0615	15 V	0.4	6.00	RFQ
GTM41134CC-0618	18 V	0.33	5.94	RFQ
GTM41134CC-0624	24 V	0.25	6.00	RFQ
GTM41134CC-0636	36 V	0.16	5.76	RFQ
GTM41134CC-0648	48 V	0.125	6.00	RFQ

Model:GTM41134-Q(CC)

May 5, 2024

SPECIFICATIONS

A) ELECTRICAL SPECIFICATIONS:

01. Input Voltage: Specified 90-264 Vac, Nameplate rated: 100-240Vac
02. Input Frequency: Specified 47-63 Hz, Nameplate rated 50-60Hz
03. Output Current: Current limited to rated output current with tolerance of +/-10%
04. Output Regulation: +/- 5% measured at the output connector
05. Line Voltage Regulation: +/- 1% typical measures at full load
06. Output Ripple (Vp-p): 1% or 150 mV whichever is greater measured at 20 MHz bandwidth with 0.1 uf ceramic capacitor in parallel with 10 uf electrolytic capacitor connected at the end of output connector at nominal line
07. Turn-On/Turn-Off Overshoot: 5% maximum, 1mS typical recovery time for 25% step load
08. Turn-On Delay: 1 second typical
09. Hold-Up Time: 8mS typical @ nominal input voltage & full load
10. Inrush Current: 30A typical @ 115Vac input ; 60A typical @ 230Vac input
11. Switching Frequency: 65 KHz typical

B) PROTECTION

1. Over-Voltage: Unit will recover upon removal of fault
2. Short Circuit: Electronically Protected, unit will recover upon removal of fault
3. Input Protection: Input line fusing

C) SAFETY

1. Dielectric Withstand Voltage: Input-Output: 5656Vdc, (2 MOPP)
2. Earth Leakage Current: N/A for Class II units, there is no PE Ground pin, so Earth Leakage current is not measured
3. Touch Current: Maximum allowed values: 100uA NC(Normal condition) 500uA SFC(single fault condition)
4. Means of Protection: 2 x MOPP
5. Primary to Secondary Bridging Capacitor: Standard configuration provided without bridging capacitors, Two (2) * Y1 type capacitors in series is available as an option upon customer request. If option employed, it is to be noted in the product deviation section of this specification document.

D) OTHER:

1. MTBF: 200,000 hours @ 25°C ambient temperature
2. Operating Temperature: 0°C to 40°C ambient temperature
3. Humidity: 0% to 90% relative humidity
4. Storage Temperature: -10°C to 80°C

E) ENCLOSURE

1. Upper Housing: High impact plastic, 94V0 polycarbonate, non-vented
2. Lower Housing: High impact plastic, 94V0 polycarbonate, non-vented
3. Size: 43.5 x 74.0 x 35.3mm +/- 1.0

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GTM41134-Q(CC)

May 5, 2024

DERATING CURVE

Model:GTM41134-Q(CC)


May 5, 2024

INPUT CONFIGURATION

Description Blade Options for Q Series Wall Plug-in Power Supplies

Data Sheet: <http://en.globtek.com/interchangeable-blades.php>

Insertion Instructions: <http://www.globtek.com/pdf/Instructions-Interchangeable-Blades.pdf>

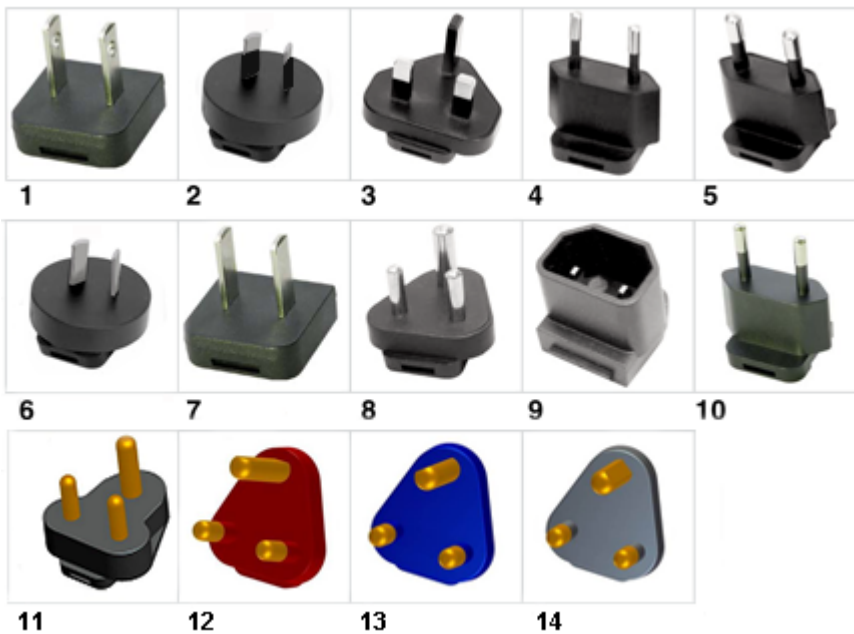Video: [Q-Blade Style Instruction Video](#)


INPUT CONNECTOR: Q-Socket (below are available blades configurations which are "not included" (unless stated above); can be purchased separately, package with power supply or as a separate "Q-KIT" if specified

01. United States / Canada / Japan NEMA 1-15P/ IEC PLUG Type A [WORKS IN PLUG B] configuration: NA 2 blades, Class II; US/CA/JP P/N: Q-NA(R)
02. Australian AS 3112 configuration: SAA 2 blade/ IEC TYPE I, Class II; AU P/N: Q-SAA(R)
03. UK BS 1363 configuration: UK 3 blade with dummy Ground/ IEC TYPE G, Class II; GB P/N: Q-UK(R)
04. European CEE 7/16 configuration: Europlug 2 pins/ IEC TYPE C [WORKS IN TYPE E&F], Class II; EU P/N: Q-EU(R)
05. Korean KS C8305 configuration: 2 pins/SIMILAR TO IEC TYPE C, Class II; KR P/N: Q-KR(R)
06. Argentina IRAM 2073 configuration: 2 blades/SIMILAR TO IEC TYPE I; AR P/N: Class II Q-AR(R)
07. China GB 2099 configuration: 2 blades/SIMILAR TO TYPE A, Class II; CN P/N: Q-CN(R)
08. India IS 1293 6A/BS546 configuration: 5A, 3 pins with Dummy Ground, Class II/IEC TYPE D; IN P/N: Q-IN(R)
09. IEC60320/C18 Inlet, Class II; P/N: Q-C18(R)
10. Brazilian NBR6147 configuration: 2 pins, Class II;SIMILAR TO IEC TYPE C BR P/N: Q-BR(R)
11. South Africa SABS164-1 and India IS 1293, IS694, 16A type plug, 3 round prongs, Class II + dummy ground, IEC TYPE M P/N: Q-SANS164-1-16A(R)
12. South Africa SABS164-4, 3 round prongs with a notched prong @ 0°, Class II + dummy ground, IEC TYPE M Red, P/N: Q-SANS164-4C-16A(R)

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<https://www.globtek.com/ds/BbQ5bcLAQCo/BVne9wGqZMt.html>

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GTM41134-Q(CC)

May 5, 2024

13. South Africa SABS164-4, 3 round prongs with a notched prong @ -53°, Class II + dummy ground, Blue, IEC TYPE M,
P/N:

Q-SANS164-4L-16A(R)

14. South Africa SABS164-4, 3 round prongs with a notched prong @ +53°, Class II + dummy ground, Black, IEC TYPE M
P/N:

Q-SANS164-4R-16A(R)

Kits

01. Q-KIT: 1,2,3,4 above

02. Q-KIT-INTL: 2,3,4 above

03. Q-KIT-6: 1,2,3,4,5,6 above

04. Q-KIT-7: 1,2,3,4,5,6,7 above

05. Q-KIT-8: 1,2,3,4,5,6,7,8 above

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM41134-Q(CC)

May 5, 2024

OUTPUT CONFIGURATION

Common output connector options:



L Type (Coaxial
5.5x2.5mm plug)



C Type (Coaxial
5.5x2.1mm plug)



K Type (Coaxial
3.5x1.3mm plug)



LL Type (5.5x2.5mm
Locking 760k type)



CL Type (5.5x2.1mm
Locking S761k type)



ML2 Type (Molex
housing 43025-0200)



YL3 Type
(KPPX-3P)



YL4 Type (KPPX-4P)



EJ1/2/3/4/5 (EIAJ
RC-5320A type
connectors)



MSB Type (Micro
USB)



USBC Type (USB
Type C)



Inquire for custom
design

For a comprehensive list of options, [click here](#)

Contact GlobTek for your specific requirements or custom solutions.

Model:GTM41134-Q(CC)

May 5, 2024


Approvals

Logo	Description
	Book 60335 up to 36 Volts
	60601-1 3rd Operating Instructions
No Logo Applicable	CB report IEC60601-1 2005 A1+C1+C2 2016-2-4 and or EN 60601-1:2006 3.1rd Edition 2xMOPP (6W max)
No Logo Applicable	CB for IEC 62368-1:2014 (Second Edition)
No Logo Applicable	CB to 60335-1 5th Edition (Safety of Household and Similar Electrical Appliances, Part 1: General Requirements) CB Report/ Certificate IEC 60335-1:2010 Up to 36 volts only
No Logo Applicable	CB report to IEC 61558-2-16_2009 1st Edition IEC 61558-1_2005 2nd Edition + A1_2009 EN 61558-1-16_2009 EN 61558-1_2005 + A1_2009.pdf
	CCC to GB4943.1-2011; GB/T9254-2008 GB17625.1-2012, Tropical <2000
	CE Certification
Conforms to ANSI/AAMI ES 60601-1:2005 Cert.to CAN/CSA Std. C22.2	cETLus ANSI_AAMI ES60601-1_2005
Conforms to ANSI/UL Std. 60950-1 Cert.to CAN/CSA Std. C22.2 NO. 60950-1	Conforms to ANSI/UL Std. 60950-1 2nd Edition Cert. to CAN/CSA Std.C22.2 NO.60950-1 2nd Edition

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM41134-Q(CC)

May 5, 2024

	AAMI ES60601-1 Issued: 2012/08/20 Medical Electrical Equipment - Part 1: CAN/CSA-C22.2 No.60601-1:14, Third Edition Issued: 2014/03/01 - Medical Electrical Equipment - Part 1:IEC 60601-1-11 Issued: 2015/01/20 Ed. 2 Medical Elec. Equip.- Part 1-11: (6W max
	cETLus-Cert-60950-1 4007497 Listed
	CHINA SJ/T 11364-2014, China RoHS Chart: http://www.globtek.com/pdf/F-GT-DJD-8.4.1-006%20China%20RoHS%20Declaration%205-20-22.pdf
Conforms to UL STD. 62368-1 Certified to CSA STD C22.2 NO.62368-1	Conforms to UL STD. 62368-1 Certified to CSA STD C22.2 NO.62368-1
	cRUus UL Recognized Component E172861 3rd Edition w-RM ANSI-AAMI ES60601-1 (2005 + C1:09 + A2:10) and CAN-CSA-C22.2 No. 60601-1 (2008)
	
	Certification # TC RU AR46.B.72092 Custom Union of Russia, Belarus and Kazakhstan for GT(M)41134
T1.0A 250VAC 	Fuse 60335 T1.0A 250VAC Up to 36 volts
Ta:40°C	IEC 60601-1 GTM41134 Maximum Ambient Temperature, Max 40°C
	Indoor Use Only - Mark is on the label or Molded in the case
IP52	Ingress Protection: ?IP52 to IEC60529:2001 Protected against dust - limited ingress (no harmful deposit) and Protected against direct sprays up to 15 degrees from the vertical (with R-Blades)
	JAPAN TUV R-PSE, Cert. No. JD 50471624, to J62368-1(H30) , J55032(H29),J3000(H25,[15V or

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM41134-Q(CC)

May 5, 2024

 GlobTek, Inc.	less]. Please reference the following website for guidelines on PSE regulations: https://www.globtek.com/r2/Szj4Vb
 GlobTek, Inc.	JAPAN TUV R-PSE, Cert. No. JD 50471624 J62368-1(H30) , J55032(H29),J3000(H25),[DC15V?30V]. Please reference the following website for guidelines on PSE regulations: https://www.globtek.com/r2/Szj4Vb
 GlobTek, Inc.	JAPAN TUV R-PSE, Cert. No. JD 50471624, to J62368-1(H30) , J55032(H29),J3000(H25),[DC30V?60V]. Please reference the following website for guidelines on PSE regulations: https://www.globtek.com/r2/Szj4Vb
EFFICIENCY LEVEL 	Efficiency: complies to section 301 of Energy Independence and Security Act (EISA) complies with Energy Star tier 2 (North America), ECP tier 2 (China), MEPS tier 2 (Australia), Code of Conduct (Europe)
LPS	Limited Power Source 60950
RoHS	Specifications of directive 2011/65/EU Annex VI (ROHS-2) with amendment 2015/863-EU (ROHS-3) http://www.ce-mark.com/Rohs%20final.pdf
	S-Mark Certificate EN 62368-1:2014 + A11 (http://www.intertek.com/marks/s/)
	Semko S-Mark-Cert-EN60601-1 and EN60950-1
	Transformer Symbol IEC 61558-1 SMPS Short-Circuit -Proof Safety Isolating Transformer
	Transformer Symbol IEC 61558-1 SMPS Switch Mode Power supply
	Ukraine UKR Sepro (Document: www.globtek.com/html/iso_certificates/GT_Ukraine.pdf)

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GTM41134-Q(CC)

May 5, 2024

	Japan: Voluntary Control Council for Interference (VCCI)
	WEEE: Complies with EU 2012/19/EU (http://ec.europa.eu/environment/waste/weee/index_en.htm) Mark is on the label or Molded in the case