

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM91110P150VV-F-S

May 10, 2025

## GTM91110P150VV-F-S

### Information

#### Model Number

GTM91110P150VV-F-S

#### Description

GTM91110P150VV-F-S, ICT / ITE / Medical Power Supply, Open Frame/Internal, Regulated Switchmode AC-DC Power Supply AC Adaptor, , Input Rating: 100-240V~, 50-60 Hz, Molex 26-60-4030 3 Position Header Pin 1: Line, Pin 2: Removed, PIN 3: Neutral, Output Rating: 150 Watts, Power rating with convection cooling (W) , 12-55V in 0.1V increments, Approvals: EAC; cETLus; Book 60601; CB 60601-1; CB 60950; CE; CE; cETLus 60601-1 3rd; China RoHS; Class I; FCC; RoHS; SIQ; SIQ; Ukraine; VCCI; WEEE; cETLus;

#### Model Picture



#### Agency Documents

<http://www.globtek.info/certs/GTM91110P/>

#### CE EC-Declaration

[https://www.globtek.com/pdf/ec\\_declaration/a0Oa000000MEMMcEAP](https://www.globtek.com/pdf/ec_declaration/a0Oa000000MEMMcEAP)

#### RoHS/RoHS2 Declaration

[https://www.globtek.com/pdf/rohs\\_cert/a0Oa000000MEMMcEAP](https://www.globtek.com/pdf/rohs_cert/a0Oa000000MEMMcEAP)

#### REACH Declaration

[https://www.globtek.com/pdf/iso\\_certificates/REACH.pdf](https://www.globtek.com/pdf/iso_certificates/REACH.pdf)

#### Conflict Minerals Declaration

<https://www.globtek.com/pdf/conflict-minerals.pdf>

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM91110P150VV-F-S

May 10, 2025

**MODEL PARAMETERS**

|                    |                                                    |
|--------------------|----------------------------------------------------|
| Type               | Open Frame/Internal                                |
| Technology         | Regulated Switchmode AC-DC Power Supply AC Adaptor |
| Category           | ICT / ITE / Medical Power Supply                   |
| Input Voltage      | 100-240V~, 50-60 Hz                                |
| I/P Amps (A)       | 4.0A                                               |
| Wattage (W)        | 150.0                                              |
| Vout Range (V)     | 12-55                                              |
| Efficiency Level   | N/A                                                |
| Ingress Protection |                                                    |
| Size (mm)          | 127x76.2x43 1U                                     |

**PROPRIETARY INFORMATION**

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.


<https://www.globtek.com/ds/39fQNKtntDQ/DK5Dtw5GNBQ.html#datasheet>

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM91110P150VV-F-S

May 10, 2025

## ENCLOSURE

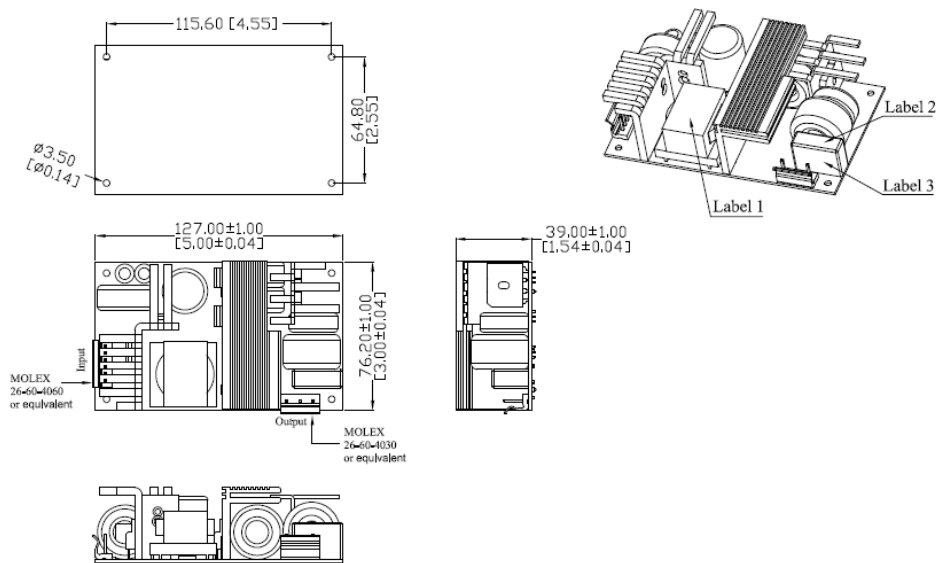

Label 1

Position Label 1 on top of Transformer


Label 2

Material: White art paper with Black nomenclature and is attached on top of CX1

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GTM91110P150VV-F-S

May 10, 2025

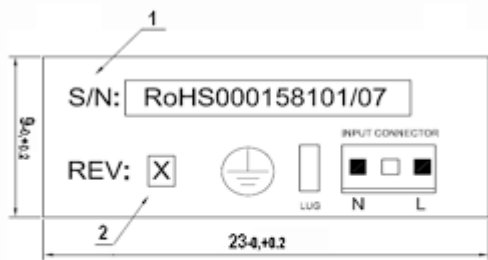

1. S/N: SERIAL NUMBER  
2. REV: BOM REVISION LEVEL,  
THIS WILL CHANGED PER BOM REVISION LEVEL

Label 3

Material: White art paper with Black nomenclature and is attached on side of CX1



Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM91110P150VV-F-S

May 10, 2025

## RATING TABLE

| Model Number       | Voltage | Amps(A) | Watts(W) | RFQ                 |
|--------------------|---------|---------|----------|---------------------|
| GTM91110P15012-F-S | 12 V    | 12.5    | 150.00   | <a href="#">RFQ</a> |
| GTM91110P15015-F-S | 15 V    | 10      | 150.00   | <a href="#">RFQ</a> |
| GTM91110P15018-F-S | 18 V    | 8.3     | 149.40   | <a href="#">RFQ</a> |
| GTM91110P24024-F-S | 24 V    | 6.25    | 150.00   | <a href="#">RFQ</a> |
| GTM91110P15024-F-S | 24 V    | 6.25    | 150.00   | <a href="#">RFQ</a> |
| GTM91110P15036-F-S | 36 V    | 4.16    | 149.76   | <a href="#">RFQ</a> |
| GTM91110P15048-F-S | 48 V    | 3.125   | 150.00   | <a href="#">RFQ</a> |
| GTM91110P15055-F-S | 55 V    | 2.73    | 150.15   | <a href="#">RFQ</a> |

## PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<https://www.globtek.com/ds/39fQNKtDtDQ/DK5Dtw5GNBQ.html#datasheet>

Model:GTM91110P150VV-F-S

May 10, 2025

## SPECIFICATIONS

### A) ELECTRICAL SPECIFICATIONS:

01. Input Voltage: Specified 90-264 Vac, Nameplate rated 100-240 Vac
02. Input Frequency: Specified 47-63 Hz, Nameplate rated 50/60 Hz
03. Inrush current: Cold start @ 25°C, 40A @ 115Vac, 80A @ 230Vac
04. Efficiency: 85% to 90% typical at full load, 120-240Vac input
05. Power factor: 0.98 typical at full load, 230Vac input
06. Turn on delay: 5 Seconds maximum, (3 seconds max option)
07. Load regulation:  $\pm 1\%$  Measured at the connector side
08. Line regulation:  $\pm 0.2\%$  Measured at the connector side
09. Output Ripple protection (Peak to Peak):  $\pm 1\%$  maximum of nominal output voltage measured at 20 MHz bandwidth with 0.1 $\mu$ f ceramic capacitor in parallel with a low impedance 47  $\mu$ f electrolytic capacitor located 200mm from the end of the output connector
10. Turn on/off overshoot: 5% Maximum, 1mS recovery time
11. Hold up time: 8 mS @ 300W load, 10mS@200W load, 16mS@150W load at 115Vac input
12. Transient response: 2% Maximum deviation, returns to initial condition in 3 ms max for 25% load step, from 10% to 100% of rated load
13. Remote sense (optional): compensates for up to 0.5V voltage drop in output wiring.  
Power supply will operate correctly, with or without remote sense pins hooked up.
14. Auxillary Output: For forced air fan 12V @ 250mA, if convection cooled 12V @ 150mA. Other output voltages and current ratings from 5V to 24V available, contact factory for availability.
15. Indicator: Green LED for output presence

### B) PROTECTION

01. Input Protection: Input line fusing and 300Vac MOV
02. Short circuit: Protected. Unit will autorecover upon removal of short
03. Overload protection: Autorecover upon removal of overload
  - 150W, 175% - 210% of nominal power rating
  - 200W, 130% - 160% of nominal power rating
  - 240W, 110% - 130% of nominal power rating
  - 300W, 110% - 130% of nominal power rating
04. Over voltage: Protected at 110- 140% of nominal output voltage, latched type. AC cycling required to restore output. Autorecovery type OVP is an option, contact factory for availability.
05. Fan output protection: 3 Pin Linear Regulator, short circuit proof

### C) SAFETY

01. Dielectric Withstand Voltage: 4000Vac or 5656Vdc from input to output,  
On Class I models, 2500Vac or 3535Vdc from input to earth
02. Earth Leakage Current:
  - Class I Input Models: Does not exceed 500uA
  - Class II Input Models: Does not apply
03. Touch Current: Does not exceed 100uA, output terminations to earth
04. Output terminations rated as SELV, and Means of Operator Protection

### D) OTHER:

01. MTBF: 200,000 Hours @ 25°C ambient temperature
02. Operating Temperature Range:

#### PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<https://www.globtek.com/ds/39fQNKtntDQ/DK5Dtw5GNBQ.html#datasheet>

Delivering leading edge, innovative power solutions for more than 30 years....

Model: GTM91110P150VV-F-S

May 10, 2025

- 10°C to 50°C @ 100% output power rating
- 10°C to 70°C @ 50% output power derating

**03. Cooling:**

- Open Frame 150W Series: Convection
- Open Frame 240W and 300W Series: 20 CFM Forced Air Cooling
- Perforated Plastic Housing 200W Series: 20 CFM Forced Air Cooling,  
with convection cooling 50% derated (100W) output capability.

**04. Relative Humidity:** operating 0% to 90% Non-condensing**05. Storage Temperature:** -30°C to 85°C**06. Altitude:** up to 2000 meter**07. Random vibration/transient drop:** MIL-STD 810E**E) MECHANICAL FORMAT:****150W, 240W and 300W Open Frame version**

Size: 127\*76.2\*43 mm

Weight: 470 grams

**200W Perforated Plastic Enclosure version**

Size: 140\*87.6\*51.9 mm


Weight: 620 grams

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM91110P150VV-F-S

May 10, 2025

## DERATING CURVE

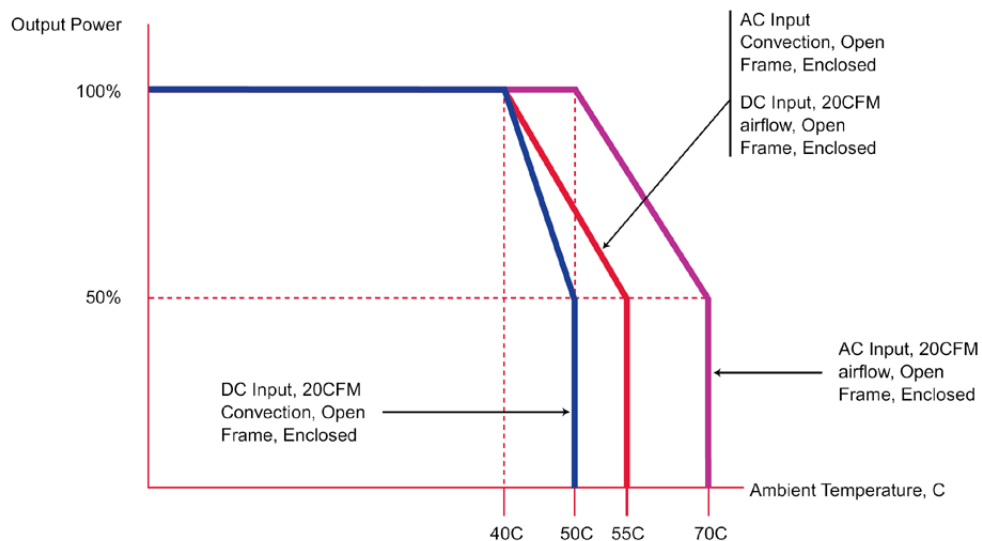

Delivering leading edge, innovative power solutions for more than 30 years....



Model:GTM91110P150VV-F-S

May 10, 2025

## INPUT CONFIGURATION

Description

Molex 26-60-4030 3 Position Header Pin 1: Line, Pin 2: Removed, PIN 3: Neutral

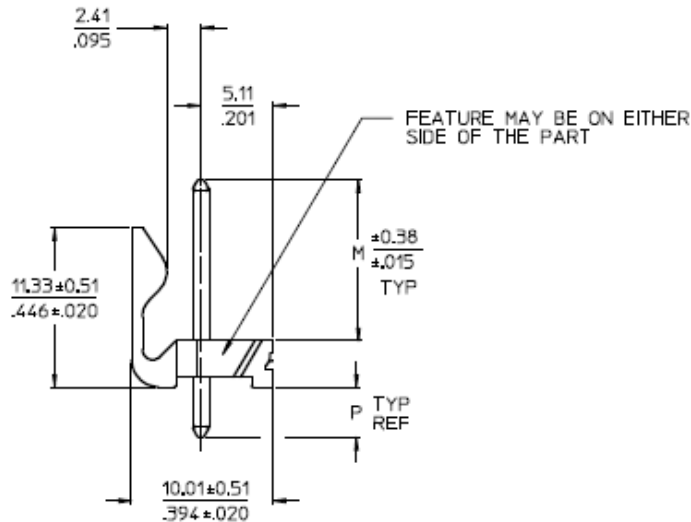

Optional Input Wiring Kits are available:

| PN/Ordering No                     | Length | End A        | End B            |
|------------------------------------|--------|--------------|------------------|
| <a href="#">XHP410070M7MLX3(R)</a> | 70     | JST XHP-4    | Molex 09-93-0300 |
| <a href="#">C810070M6MLX3(R)</a>   | 60     | IEC60320 C8  | Molex 09-93-0300 |
| <a href="#">C1410070M6MLX3(R)</a>  | 60     | IEC60320 C14 | Molex 09-93-0300 |

Custom lengths, construction, cable types, ferrites, filters, and termination available upon request.

Model:GTM91110P150VV-F-S

May 10, 2025

## Approvals

| Logo                                                                                | Description                                                                                                                                                                                                                                                   |
|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|    | 60601-1 3rd Operating Instructions                                                                                                                                                                                                                            |
| No Logo Applicable                                                                  | CB report IEC 60601-1: 2005 + CORR. 1 (2006) + CORR. 2 (2007) and or EN 60601-1:2006 3rd Edition including 2MOOP requirements                                                                                                                                 |
| No Logo                                                                             | CB Certificate IEC 60950-1:2005 (2nd Edition), Am 1: 2009, CB report IEC 60950-1:2005 (2nd Edition), Am 1: 2009 and EN 60950-1:2006 + Am 1:2010 + Am 11:2009 + Am 12:2011                                                                                     |
|    | CE Mark: tested to comply with EN55022:2006/A1:2007 Class B, EN610003-2, EN610003-3 including EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6N EN61000-4-11; EMI: Complies with EN55011 CLASS B and FCC Part 15B - On label or Molded in case |
|   | CE Mark: tested to comply with EN61000-3-2, EN61000-3-3 and EN50082-1, including EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6, EN61000-4-8, EN61000-4-11, EN61001-1-2-2007<br>EMI: Complies with EN55011 CLASS B and FCC Part 15 B         |
| Conforms to ANSI/UL Std. 60950-1<br>Cert.to CAN/CSA Std. C22.2 NO. 60950-1          | Conforms to ANSI/UL Std. 60950-1 2nd Edition<br>Cert. to CAN/CSA Std.C22.2 NO.60950-1 2nd Edition                                                                                                                                                             |
|  | cETLus-Cert-4007497 ANSI/AAMI ES60601-1:2005/A1:2012 Issued: 2012/08/20 Medical electrical equipment ? Part 1: Amendment 1; CAN/CSAC22.2 No. 60601-1:14, Third Edition Issued: 2014/03/01 - Medical Electrical Equipment - Part 1                             |
|  | cETLus-Cert-60950-1 4007497 Listed (FOR GTM91110P)                                                                                                                                                                                                            |
|  | CHINA SJ/T 11364-2014, China RoHS Chart:<br><a href="http://www.globtek.com/pdf/F-GT-DJD-8.4.1-006%20China%20RoHS%20Declaration%205-20-22.pdf">http://www.globtek.com/pdf/F-GT-DJD-8.4.1-006%20China%20RoHS%20Declaration%205-20-22.pdf</a>                   |
|                                                                                     | Class I Earth Ground                                                                                                                                                                                                                                          |
|                                                                                     |                                                                                                                                                                                                                                                               |

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM91110P150VV-F-S

May 10, 2025

|                                                                                                    |                                                                                                                                                                                                                   |
|----------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                   | Certification # TC RU AR46.B.75423 Custom Union of Russia, Belarus and Kazakhstan                                                                                                                                 |
|                   | FCC PART 15 CLASS B                                                                                                                                                                                               |
|                   | Indoor Use Only - Mark is on the label or Molded in the case                                                                                                                                                      |
| RoHS                                                                                               | Specifications of directive 2011/65/EU Annex VI (ROHS-2) with amendment 2015/863-EU (ROHS-3)<br><a href="http://www.ce-mark.com/Rohs%20final.pdf">http://www.ce-mark.com/Rohs%20final.pdf</a>                     |
| <br>IEC/EN60601-1 | SIQ Mark License EN60601-1                                                                                                                                                                                        |
| <br>IEC/EN60950-1 | SIQ Mark License EN60950-1                                                                                                                                                                                        |
|                 | UKCA Certification                                                                                                                                                                                                |
| <br>10276       | Ukraine UKRSepro (Document: <a href="http://www.globtek.com/html/iso_certificates/GT_Ukraine.pdf">www.globtek.com/html/iso_certificates/GT_Ukraine.pdf</a> )                                                      |
|                 | Japan: Voluntary Control Council for Interference (VCCI)                                                                                                                                                          |
|                 | WEEE: Complies with EU 2012/19/EU ( <a href="http://ec.europa.eu/environment/waste/weee/index_en.htm">http://ec.europa.eu/environment/waste/weee/index_en.htm</a> )<br>Mark is on the label or Molded in the case |