

Model:GTM96300-36VV-R3A

May 10, 2025

GlobTek's GTM96300 series of external tabletop/desktop power supplies offer up to 36W of power while offering compliance to the latest ITE, Medical, Household, and Efficiency requirements Hybrid Class I

Information

Model Number	GTM96300-36VV-R3A
Description	The family is certified for IEC 60601-1 Medical Safety and EMC (4th edition, 2MOPP), IEC 60950-1 Information Technology Equipment, IEC 62368-1 Audio/video, information and communication technology equipment, UL1310 Class 2 Power Unit, and IEC 60335-1 Safety of household and similar electrical appliances. The power supplies which have an output current rating of 6A or less are all rated for Limited Power Source (LPS) application
Model Picture	 Image Not Available This image is not available because: ▪ You don't have the privileges to see it, OR ▪ It has been removed from the system
Agency Documents	http://www.globtek.info/certs/GTM96300-TZ/
CE EC-Declaration	https://www.globtek.com/pdf/ec_declaration/a0Oa000000Mm3T6EAJ
RoHS/RoHS2 Declaration	https://www.globtek.com/pdf/rohs_cert/a0Oa000000Mm3T6EAJ
REACH Declaration	https://www.globtek.com/pdf/iso_certificates/REACH.pdf
Conflict Minerals Declaration	https://www.globtek.com/pdf/conflict-minerals.pdf

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM96300-36VV-R3A

May 10, 2025

MODEL PARAMETERS

Type	Wall Plug-in+Desktop Combination
Technology	Regulated Switchmode AC-DC Power Supply AC Adaptor
Category	Medical/ICT/ITE/Household use Power Supply
Input Voltage	100-240V~, 50-60 Hz
I/P Amps (A)	1.0A
Wattage (W)	36.0
Vout Range (V)	5-54
Efficiency Level	USA DOE Level VI / Eco-design Directive 2009/125/EC, (EU) 2019/1782
Ingress Protection	IP40 (cord), IP52(R-blades)
Size (mm)	102.19 x 47.5 x 36.7

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

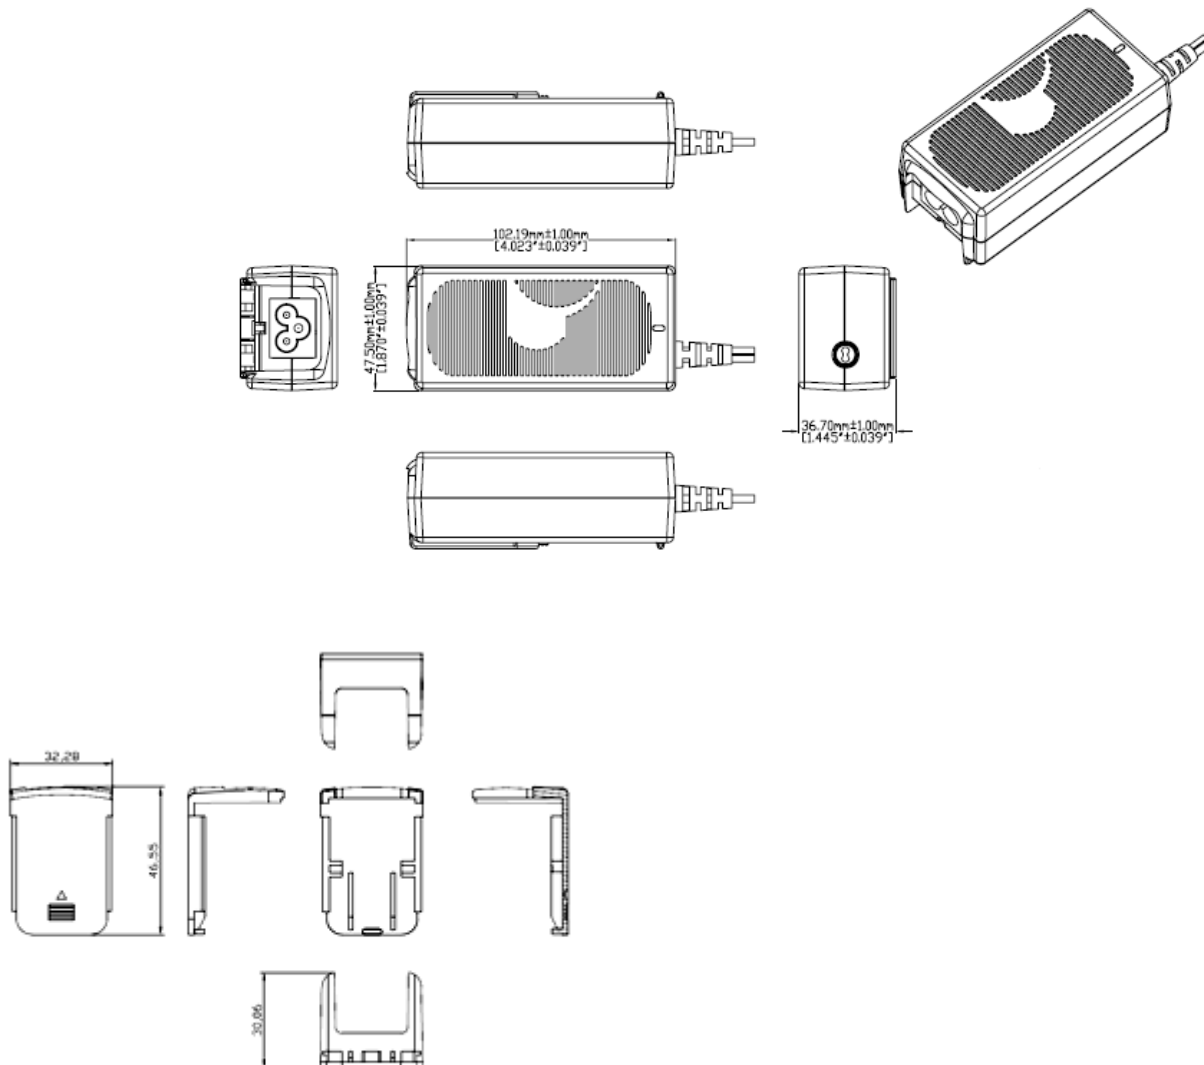
<https://www.globtek.com/ds/a95btotw24A/Tj75eA2J9oB.html#datasheet>

Delivering leading edge, innovative power solutions for more than 30 years....

Model: GTM96300-36VV-R3A

May 10, 2025

ENCLOSURE



Units shipped without an installed input plug have a "desktop insert" installed.

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM96300-36VV-R3A

May 10, 2025

RATING TABLE

Model Number	Voltage	Amps(A)	Watts(W)	RFQ
GTM96300-2207.5-2.5-R3A	5 V	4.4	22.00	RFQ
GTM96300-1007.5-2.5-R3A	5 V	2	10.00	RFQ
GTM96300-0607.5-2.5-R3A	5 V	1.2	6.00	RFQ
GTM96300-2307.5-2.5-R3A	5 V	4.5	22.50	RFQ
GTM96300-1507.5-1.55-R3A	5.95 V	2.5	14.88	RFQ
GTM96300-2307.5-1.55-R3A	5.95 V	3.78	22.49	RFQ
GTM96300-2107-R3A	7.0 V	3	21.00	RFQ
GTM96300-1507-R3A	7.0 V	2	14.00	RFQ
GTM96300-1407-R3A	7.0 V	2	14.00	RFQ
GTM96300-3010.5-1.5-R3A	9 V	3.333	30.00	RFQ
GTM96300-3012-R3A	12 V	2.5	30.00	RFQ
GTM96300-2014.5-2.5-R3A	12 V	1.670	20.04	RFQ
GTM96300-3614.5-2.5-R3A	12 V	3	36.00	RFQ
GTM96300-3014.5-2.5-R3A	12 V	2.5	30.00	RFQ
GTM96300-2315-R3A	15 V	1.5	22.50	RFQ
GTM96300-3619.5-4.5-R3A	15 V	2.4	36.00	RFQ
GTM96300-3019.5-4.5-R3A	15 V	2	30.00	RFQ
GTM96300-3619.5-1.5-R3A	18 V	2	36.00	RFQ
GTM96300-3624.0-5.0-R3A	19 V	1.9	36.10	RFQ
GTM96300-3024-R3A	24 V	1.25	30.00	RFQ
GTM96300-3624-R3A	24 V	1.5	36.00	RFQ
GTM96300-3036-6.0-R3A	30 V	1	30.00	RFQ
GTM96300-3636-6.0-R3A	30 V	1.2	36.00	RFQ
GTM96300-3048-R3A	48 V	0.625	30.00	RFQ
GTM96300-3648-R3A	48 V	0.75	36.00	RFQ

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<https://www.globtek.com/ds/a95btotw24A/Tj75eA2J9oB.html#datasheet>

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GTM96300-36VV-R3A

May 10, 2025

GTM96300-3654-R3A	54 V	0.666	35.96	RFQ

Model:GTM96300-36VV-R3A

May 10, 2025

SPECIFICATIONS

A) ELECTRICAL SPECIFICATIONS:

01. Input Voltage: Specified 90-264 Vac, Nameplate rated: 100-240Vac
90-264 Vac range @ 100% of rated load current
85-264 Vac range @ 85% of rated load current
110-370 VDC range @ 100% of rated load current
02. Input Frequency: Specified 47-63 Hz, Nameplate rated 50-60Hz
03. Output Regulation: +/- 5% measured at the output connector
04. Line Voltage Regulation: +/- 0.5% typical measured at full load
05. Output Ripple (Vp-p): 1% or 100 mV whichever is greater, measured at 20 MHz bandwidth with 0.1uF ceramic capacitor in parallel with a low impedance 47uF electrolytic capacitor connected at the end of the output connector
06. Turn-On Overshoot + Transient Response: 5% maximum, 1 ms typical recovery time for 40% to 70% step load
07. Turn-On Delay: 1 second maximum @ full load, nominal line
08. Hold-Up Time: 8 ms typical @ nominal input voltage and full load
09. Inrush Current: 30A/60A maximum cold start @ 115/230Vac input
10. Efficiency: Compliant with Efficiency Level VI and CoC Tier 2 standards
11. No Load Standby Power: <0.075 W @ 230Vac
12. Green LED power indicator

B) PROTECTION

01. Input Protection: Input line fusing and 300Vac MOV
02. Short Circuit/ Overload: Electronically protected; output will auto recover upon removal of fault
Output Current Limit: 110% to 160% of rated output current
(upper end of current limit range is determined by normal output power rating, not derated output power level)
03. Output Over-Voltage: 110% to 130% of nominal output voltage

C) SAFETY

01. Dielectric Withstand Voltage:
4000VAC or 5656VDC, primary-to-secondary
1768VAC or 2500VDC, primary-to-earth (3-conductor input models only)
1500VAC or 2121VDC, secondary-to-earth (F2 configuration only)
02. Earth Leakage Current:
300µA max. NC & SFC (N/A for 2-conductor input models), tested per IEC60601-1
03. Touch Current: Class I models < 20uA, Class II models < 75uA, tested per IEC60601-1
04. Earth Continuity Test: < 0.1 Ohm between earth pin at AC input and PCB termination point (Class I models only)
05. Means of Protection:
2 x MOPP primary-to-secondary
1 x MOPP primary-to-earth (3-conductor input models only)
1 x MOPP secondary-to-earth (F2 configuration only)
06. Compliant Standards: See listing at end of this specification for specifics
07. Output Isolation Options:
 - a) C8 or C18 Inlet, Class II
 - b) C6 or C14 Inlet, Class II FE, output isolated from earth contact
 - c) C6 or C14 Inlet, Class I, Output negative directly attached to earth contact

D) EMC

- EN 60601-1-2, 4th edition
Emissions, per EN 55032, EN 61000-6-3, EN 61000-6-4, CISPR11 and CISPR22
Conducted Emissions: Class B, FCC Part 15, Class B
Radiated Emissions: Class B, FCC Part 15, Class B
Line Frequency Harmonics EN61000-3-2, Class A
Voltage Fluctuations/Flicker EN61000-3-3

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<https://www.globtek.com/ds/a95btotw24A/Tj75eA2J9oB.html#datasheet>

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM96300-36VV-R3A

May 10, 2025

Immunity, per EN 55035, EN 61000-6-1, EN 61000-6-2

Static Discharge Immunity EN61000-4-2, 10KV Contact Discharge, 20KV air discharge

Radiated RF Immunity EN61000-4-3, 10V/m 80-1000MHz, 3V/m 1-2.7GHz, 80% 1KHz AM.

EFT/Burst Immunity EN61000-4-4, 4KV/100KHz.

Line Surge Immunity EN61000-4-5, 2KV differential, 4KV common-mode

Conducted RF Immunity EN61000-4-6, 3Vrms, 80% 1KHz AM

Power Frequency Magnetic Field Immunity EN61000-4-8, 3A/m

Voltage Dip Immunity EN61000-4-11, Performance Criteria B/C

E) OTHER:

01. MTBF: 1,000,000 Hours @ 40°C ambient temperature, full load

02. GTM96300 Family: -10°C to 40°C ambient temperature with full load

Regarding Operating Temperature,

a- See below derating table for output power capability at alternate temperature

b- Extended low end temperature range available as custom option

03. Operating Humidity: 0% to 95% relative humidity, non-condensing

04. Storage Temperature: -30°C to 80°C

05. Operating Altitude: 5000 meters

06. ROHS: Compliant with latest regulations, see approvals section below

F) ENCLOSURE

01. Housing: High impact plastic, 94V0 polycarbonate, non-vented

02. Markings: Label or Laser Printed

03. AC Input mechanical options: Desktop C6, C8, C14 or C18 IEC Inlet.

Hybrid option (Desktop or Changeable Blade Wall Plug-in) Class I or Class II input

G) SPECIAL OPTIONS

01. Cost reduction, removal of LED

02. Custom cordsets, various cordage types, and connector types

03. Custom markings

04. Short term output surge capability

05. Reduced leakage current versions

06. Tightened output voltage tolerance

07. Reduced output ripple level

08. Reduced output power rating marking

09. High reliability PCB laminate with plated through holes for IPC610 Class 2 compliance

10. Special housing colors and cordset colors

11. Quasi constant current output, for battery charger applications

12. Back EMF applications, custom solutions. For unusual motor load aps and other high inductance reverse energy flow requirements

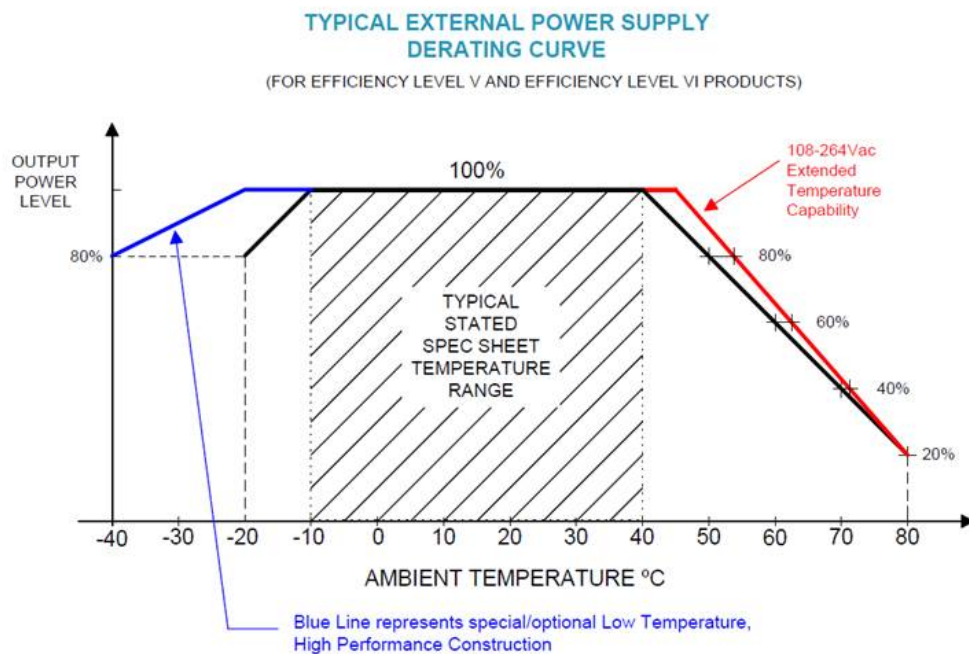
13. Improved ingress protection rating

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM96300-36VV-R3A

May 10, 2025

DERATING CURVE




Model:GTM96300-36VV-R3A

May 10, 2025

INPUT CONFIGURATION

Description IEC 60320/C6 AC Inlet Connector, Class I, Earth Ground (aka "Mickey Mouse")


[Blade Insertion Instructions](#)
[R-Blade Style Instruction Video](#)


Mates with IEC 60320/C5 Plug


This series of Interchangeable Blade products may be used with Proprietary Interchangeable Blades as described below or with standard international power cords.

Optional INPUT BLADES: R-Socket: below are available blades configurations which are "not included" (unless stated above); may be purchased separately, packaged with power supply, or as a separate "R-KIT" if specified


1. Class I model NEMA 5-15P (Type B), Class I AC power plug with 2 blades & ground pin, R-NA-3(R)
2. Australian AS 3112 (Type I) configuration: SAA 3 pins Class I, R-SAA-3(R)
3. UK BS 1363 (Type G) configuration: UK 3 pins (Ground) Class I, R-UK-3(R)
4. European CEE 7/7 (Type E and F) configuration: European plug 2 PINS + ground, Class I, R-EU-3(R)
5. Desktop Insert
- Kits
05. R-KIT-3(R) 1,2,3,4 above
06. R-KIT-3-INTL(R): 2,3,4 above




UL 3P

P/N: R-NA-3(R)
NORTH AMERICA


UK 3P

P/N: R-UK-3(R)
UNITED KINGDOM
HONG KONG
SINGAPORE


AUS 3P

P/N: R-SAA-3(R)
AUSTRALIA


EU 3P

P/N: R-EU-3(R)
EUROPE
SOUTH AMERICA

Below are standard cordsets which are "not included" (unless stated above); these can be purchased separately or package with the power supply. Contact your Sales Engineer if the style required is not shown below. Many more available in different lengths, colors or cable material.

[Standard International IEC 320/C5 Cordsets](#)

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<https://www.globtek.com/ds/a95btotw24A/Tj75eA2J9oB.html#datasheet>

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM96300-36VV-R3A

May 10, 2025

Part Number / Link	Country	Plug	Connector	Length (mm)	Length (ft)
3021066F712(R)	N. American (Type B)	NEMA 5-15P	IEC 320/C5	1880	6
1191068F0712(R)	N. American (Type B)	NEMA 5-15P Hospital	IEC 320/C5	2459	8
2194262M0712(R)	Argentina (Type I)	IRAM 2073	IEC320/C5	2050	6.7
2064262M0712(R)	Australian (Type I)	AS3112 / 3 PRONG	IEC 320/C5	2000	6.6
204B4262M0712(R)	Brazil (Type N)	BRAZIL	IEC 320/C5	2000	6.6
6023592M5712(R)	China (Type I)	CCC GR2099	IEC 320/C5	2500	8
23144262M0712(R)	Europe (Type E)	CEE 7/7	IEC 320/C5	2050	6.6
2313K3432M0712(R)	Korea (Type F)	KS C 8305	IEC 320/C5	2000	6.6
205IN4262M0712(R)	India (Type D)	India IS 1293 (also known as IA16A3 or BS546)	IEC320/C5	2000	6.6
377C4262M0712(R)	Israel (Type H)	ISL	IEC320/C5	2050	6.7
23024262M0712(R)	Italy (Type L)	CEI 23-16/VII	IEC 320/C5	2000	6.6
3003316F0712(R)	Japan (Type B)	JIS 8303 / 3 PINS	IEC 320/C5	1830	6
3021066F0712ULPSE(R)	Japan / USA (Type B)	JIS 8303 / 3 PINS + NEMA 5-15P	IEC 320/C5	1830	6
2054262M0712(R)	S. Africa (Type D)	South Africa SABS164-1 (6A type plug)	IEC320/C5	2050	6.7
2084262M0712(R)	S.Africa (Type M)	South Africa SABS164-1 (16A type plug)	IEC 320/C5	2000	6.6
23214262M0712(R)	Switzerland (Type J)	SEV 1011 (EL 203)	IEC 320/C5	2000	6.6
3003316F0712(R)	Taiwan (Type B)	BSMI	IEC 320/C5	2000	6.6
6104262M0712(R)	UK, Hong Kong, Singapore, Gulf States (Type G)	BS1363	IEC 320/C5	2000	6.6

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM96300-36VV-R3A

May 10, 2025

OUTPUT CONFIGURATION

Common output connector options:



L Type (Coaxial
5.5x2.5mm plug)



C Type (Coaxial
5.5x2.1mm plug)



K Type (Coaxial
3.5x1.3mm plug)



LL Type (5.5x2.5mm
Locking 760k type)



CL Type (5.5x2.1mm
Locking S761k type)



ML2 Type (Molex
housing 43025-0200)



YL3 Type
(KPPX-3P)



YL4 Type (KPPX-4P)



EJ1/2/3/4/5 (EIAJ
RC-5320A type
connectors)



MSB Type (Micro
USB)



USBC Type (USB
Type C)



Inquire for custom
design

For a comprehensive list of options, [click here](#)

Contact GlobTek for your specific requirements or custom solutions.

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM96300-36VV-R3A

May 10, 2025

Approvals

Logo	Description
No Logo Applicable	EU 230V CoC Tier 2, 278/2009, Mar 2014
	Book 60335 up to 36 Volts
	60601-1 3rd Operating Instructions
No Logo Applicable	CB for IEC 60601-1:2005 (Third Edition) + CORR. 1 (2006) + CORR. 2 (2007) + AM1 (2012) or IEC 60601-1 (2012 reprint) (Ed 3.1) up to 48V only
No Logo Applicable	CB for IEC 60950-1:2005 (Second Edition) + Am 1:2009 + Am 2:2013
No Logo Applicable	CB to IEC 60335-1:2010 (Fifth Edition) incl. Corr. 1:2010 and Corr. 2:2011 + A1:2013 for only
No Logo Applicable	CB for IEC 62368-1:2014 (Second Edition)
	CCC Altitude up to 5000 m (up to 48V) GB17625.1-2012, GB4943.1-2011, GB/T9254-2008
	CE Mark: tested to comply with EN 55032:2012+AC:2013, EN 61000-3-2:2014, EN 61000-3-3:2014, EN 55024:2010, EN 60601-1-2:2015
	Audio/Video, Information And Communication Technology Equipment - Part 1: Safety Requirements [UL 62368-1:2014 Ed.2] Audio/Video, Information And Communication Technology Equipment - Part 1: Safety Requirements [CSA C22.2#62368-1:2014 Ed.2]
Conforms to ANSI/UL Std. 60950-1 Cert. to CAN/CSA Std. C22.2 NO. 60950-1	Conforms to ANSI/UL Std. 60950-1 2nd Edition Cert. to CAN/CSA Std. C22.2 NO. 60950-1 2nd Edition

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<https://www.globtek.com/ds/a95btotw24A/Tj75eA2J9oB.html#datasheet>

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM96300-36VV-R3A

May 10, 2025

	AAMI ES60601-1 Issued: 2012/08/20 Medical Electrical Equipment - Part 1: CAN/CSA- No.60601-1:14, 3rd Ed Issued: 2014/03/01 - Medical Electrical Equipment - Part 1:IEC 60601-1 Issued: 2015/01/20 Ed. 2 Medical Elec. Equip.- Part 1-11: to 48V only
	Information Technology Equipment Safety Part 1: General Requirements (UL 60950-1 I 2007/03/27 Ed: 2 Rev: 2014/10/14) Information Technology Equipment Safety Part 1: General Requirements (CSA C22.2 N 60950-1Issued: 2007/03/27 Ed: 2 (R2012) Amd. 1:
	CHINA SJ/T 11364-2014, China RoHS Chart: http://www.globtek.com/pdf/F-GT-DJD-8.4.1-006%20China%20RoHS%20Declaration%
Conforms to AAMI STD. ES60601-1 Certified to CAN/CSA STD.C22.2 NO.60601-1	Conforms to AAMI STD. ES60601-1,IEC 60601-1-11 Certified to CAN/CSA STD.C22.2 NO.60601-1
Conforms to UL STD. 1310 Certified to CSA STD. C22.2 NO.223	Conforms to UL STD. 1310 Certified to CSA STD. C22.2 NO.223
Conforms to UL STD. 60950-1 Certified to CSA STD C22.2 NO.60950-1	Conforms to UL STD. 60950-1 Certified to CSA STD C22.2 NO.60950-1
Conforms to UL STD. 62368-1 Certified to CSA STD C22.2 NO.62368-1	Conforms to UL STD. 62368-1 Certified to CSA STD C22.2 NO.62368-1
Conforms to UL Std.62368-1 Cert. to CSA Std.C22.2 No.62368-1	Conforms to UL Std.62368-1 Cert. to CSA Std.C22.2 No.62368-1
	Declaration ДС № EAЭC N RU Д-US.KA01.B.10453_19 Custom Union of Russia, Belar Kazakhstan http://www.globtek.com/redirect/?loc=gost-certificate-eac-declaration
	Class 2 Power Units [UL 1310:2011 Ed.6+R:01Feb2017] Power Supplies With Extra-Low Voltage Class 2 Outputs [CSA C22.2#223:2015 Ed.3] u
	Information Technology Equipment Safety Part 1: General Requirements (UL 60950-1 I

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM96300-36VV-R3A

May 10, 2025

	2007/03/27Ed: 2 Rev: 2014/10/14) Information Technology Equipment Safety Part 1: General Requirements (CSA C22.2 N Issued: 2007/03/27 Ed: 2 (R2012)
	IEC 60601-1-11 Issued: 2015/01/20 Ed. 2 Medical Elec. Equip.- Part 1-11: Gen. Req. fo Safety & Essential Perf.- Collateral Standard - Req. for Medical Elec. Equip. & Medical Elec.Syst the Home Healthcare Environment; up to 48V only
	Compliance of this power supply with FCC Part 15, Class B has been demonstrated wit output load. The FCC law stipulates that system-level testing is required to demonstrate with the FCC emission limits with the actual system load.
	Fuse 60335 T3.15A 250VAC Up to 36 volts
CAN ICES-3(B)/NMB-3(B)	Compliance of this PSU with Industry Canada, Class B demonstrated with a standard o The ICES law stipulates that system-level testing is required to demonstrate compliance ICES-3 emission limits with the actual system load.
IS 13252 (Part 1) IEC 60950-1  R-41017175 www.bis.gov.in	Bureau Of Indian Standards for GTM96300-T3 (5.,7.5,9,12,15,24and 48V only)
	Indoor Use Only - Mark is on the label or Molded in the case
IP40	Ingress Protection: ?IP40 to IEC60529:2001 Protection against granular foreign bodies
 DC-E-G71-0031 PRECAUCION: PARA USO EN EQUIPOS ELECTRONICOS SOLAMENTE	IRAM certificate to IEC 62368-1:2014

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM96300-36VV-R3A

May 10, 2025

 GlobTek, Inc.	JAPAN TUV R-PSE, Cert. No. JD 50473430, to J62368-1(H30) , J55032(H29),J3000(H less). Please reference the following website for guidelines on PSE regulations: https://www.globtek.com/r2/Szj4Vb
 GlobTek, Inc.	JAPAN TUV R-PSE, Cert. No. JD50473430 , to J62368-1(H30) , J55032(H29),J3000(H 30V]. Please reference the following website for guidelines on PSE regulations: https://www.globtek.com/r2/Szj4Vb
 GlobTek, Inc.	JAPAN TUV R-PSE, Cert. No. JD 50473430, to J62368-1(H30) , J55032(H29),J3000(H 60V]. Please reference the following website for guidelines on PSE regulations: https://www.globtek.com/r2/Szj4Vb
	Korea for GTM96300-36VV-T3(A) R3A (5, 5.4, 5.95, 7.5 only)
EFFICIENCY LEVEL VI	Efficiency: complies to section 301 of Energy Independence and Security Act (EISA) co Energy Star tier 2 (North America), ECP tier 2 (China), MEPS tier 2 (Australia), Code of (Europe)
LPS	Limited Power Source 60950
LPS	Limited Power Source 62368
	Morocco SDoC declaration http://www.globtek.info/certs/Morocco%20SDoC%20Declaration/
	NOM (Mexico) to NOM-001-SCFI-1993 (5 Volts only)
 GMA-515496-EA	RCM certificate GMA-515496-EA; Australia and New Zealand Regulatory Compliance, http://rcmstandards.org.au/rcmfaq/rcmfaq.htm
RoHS	Specifications of directive 2011/65/EU Annex VI (ROHS-2) with amendment 2015/863-E http://www.ce-mark.com/Rohs%20final.pdf

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<https://www.globtek.com/ds/a95btotw24A/Tj75eA2J9oB.html#datasheet>

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GTM96300-36VV-R3A

May 10, 2025

	S-Mark Certificate EN 62368-1:2014 + A11 (http://www.intertek.com/marks/s/)
	IEC 60601-1:2005 (Third Edition) + CORR. 1 (2006) + CORR. 2 (2007) + AM1 (2012) EN 60601-1:2006/ A1:2013+A12:2014 up to 48V only
	S-Mark Certificate EN 60950-1:2006 + A11:2009 + A1:2010 + A12:2011 +A2:2013 (http://www.intertek.com/marks/s/)
	UKCA Certification
 10276	Ukraine UKRSePro (Document: www.globtek.com/html/iso_certificates/GT_Ukraine.pdf)
DO NOT REMOVE THE TAG WARNING/ADVERTISEMENT RISK OF ELECTRIC SHOCK DRY LOCATION USE ONLY FOR INDOOR USE ONLY Risque de choc électrique Utilisation endroit sec Pour une utilisation en intérieur See instructions if the input plug does not fit the power outlet	UL1310 Warning Label Up To 42.4 Volts with plugs
	Japan: Voluntary Control Council for Interference (VCCI)
	WEEE: Complies with EU 2012/19/EU (http://ec.europa.eu/environment/waste/weee/index_en.htm) Mark is on the label or Molded in the case