


PROPRIETARY INFORMATION:
 PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE, RFS.27447	10/25/19	MK
B	CLARIFY THE CONNECTION FOR 'USBA' and 'USBC', RFS. 27553	7/15/20	MK

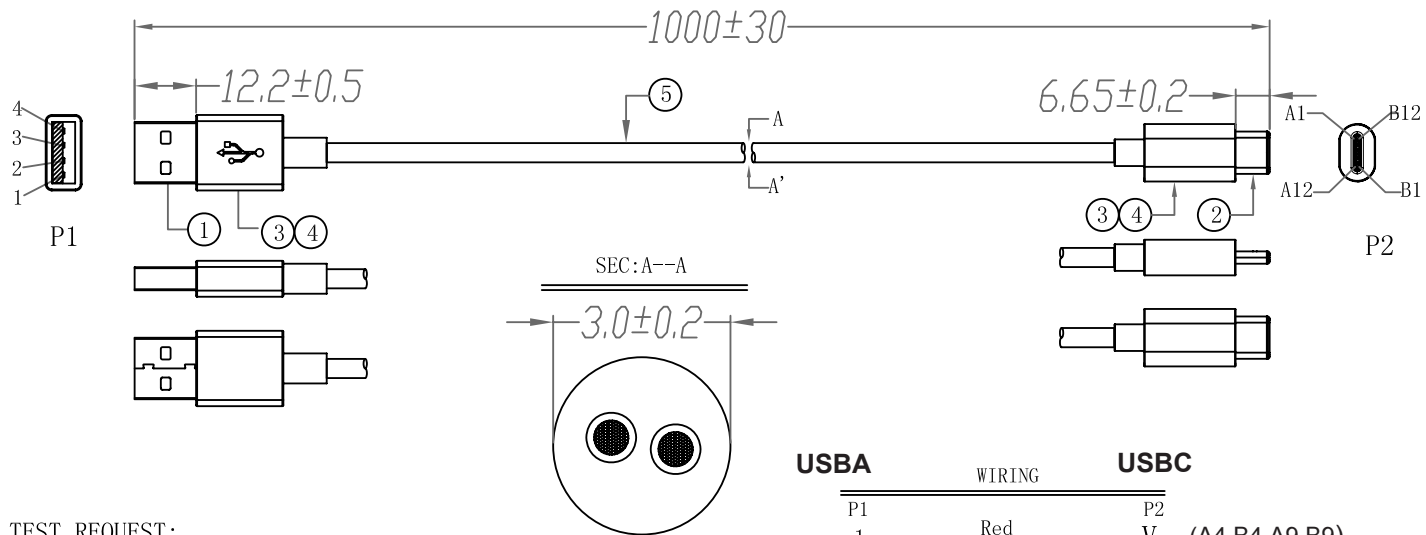

TEST REQUEST:

- 1) 100% OPEN, SHORT, MISS WIRE TEST.
- 2) Insulation resistance; DC300V 10Mohm Min.
- 3) Conductor resistance: 5 ohm Max

USBA	WIRING	USBC
P1		P2
1	Red	V (A4,B4,A9,B9)
4	Black	GND (A1,B1,A12,B12)

NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QT'	Y	UN.
⑤	Cable	22AWG (45/0.10BC)*2C(Red,Black) Jacket:0D3.0 Black PVC	1000		mm
④	PE	LD-PE	5		G
③	Molding	45P PVC Color:Black	10		G
②	USB C TYPE 2.0	USB TYPE C 2.0 Solder Type ,The Pin Gold Plated , Shell Nickel Plated	1		PC
①	USB A/Male	USB A/Male, Solder Type, The Pin Gold Plated, Shell Nickel Plated	1		set

DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
TABULATION BLOCK				
		TOLERANCES: DECIMALS ANGULAR .xx +/- 0.1 +/- 1° .xxx +/- .005		GlobTek, Inc. www.globtek.com 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111
		MILLIMETERS ANGULAR .xx +/- 0.3 +/- 1° .xxx +/- .013		
INIT.BY: NF DATE: 10/25/19		DWG TITLE: DETACHABLE USB CORD, USB A TO USB C TYPE 2.0		
DRAWN: NF DATE: 10/25/19		FSCN No.: G, CC	SIZE A	MODEL: N / A REV. B
APRVD: MK DATE: 10/25/19		SCALE: NONE		PART NO: USBA2C1M0USBC(R) SHEET 1/1

Foot Note:
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

Limitation of Use:
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice