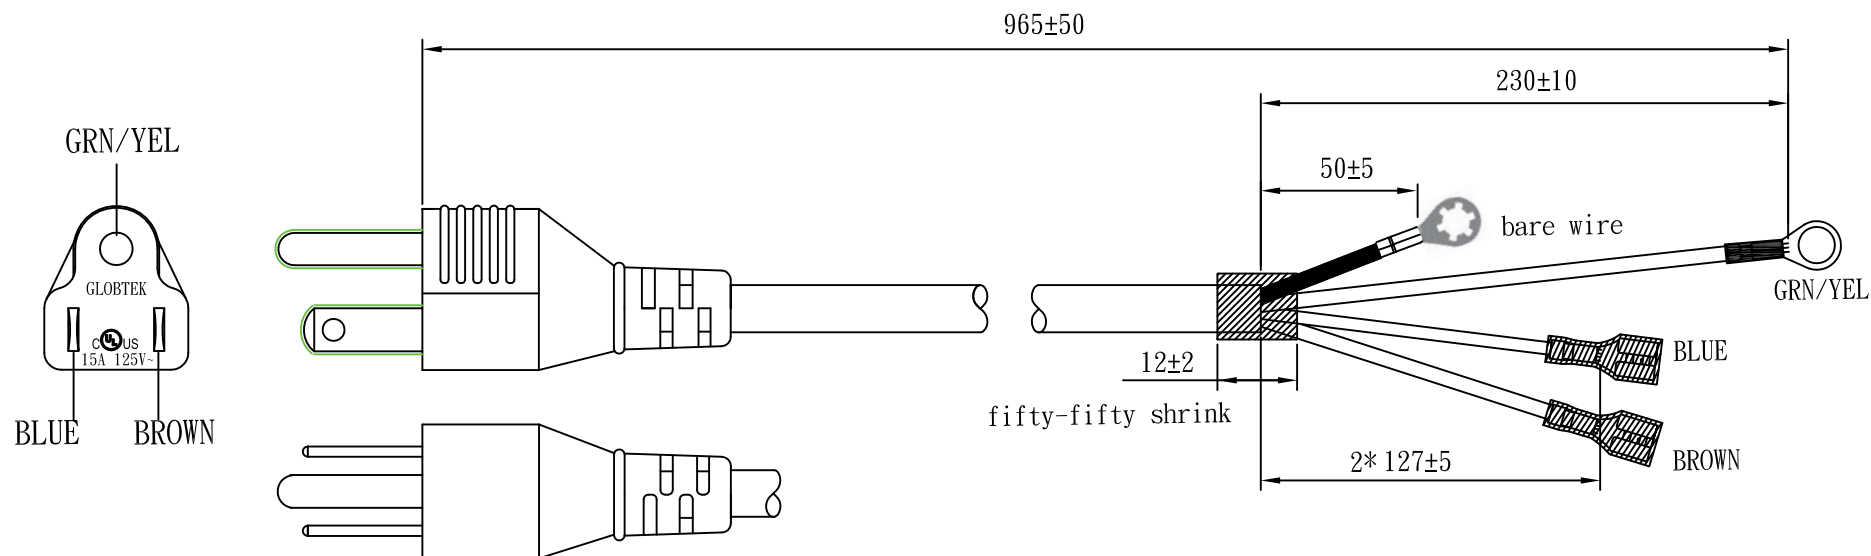


PROPRIETARY INFORMATION:

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION

REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	07/17/02	BS
B	UPDATE CORDSET DIMENSIONS	07/29/02	BS
C	UPDATE CONDUCTOR TERMINATION TABLE	10/29/02	BS
D	Update Locking Ring #8 stud , Amp 640204-1 to Ring Terminal AMP 61794-1 #8	10/08/23	BS
	Update cable drawing, RFS.27824		
D1	Update Ring Terminal AMP 61794-1 #8 to Locking Ring #8 stud , Amp 640204-1	10/11/23	BS


GENERAL SPECIFICATIONS:

CABLE TYPE / SIZE: SJT, # 14 AWG, 3 CONDUCTOR, WITH OVERALL FOIL SHIELD AND DRAIN WIRE
 TEMPERATURE RATING: 105°C
 CONDUCTOR COLORS: BLUE / BROWN / GREEN/YELLOW
 CABLE JACKET COLOR: BLACK
 OVERALL LENGTH (L): 965 ± 50 mm
 CABLE OUTER DIAMETER: 10.0 ± 0.5 mm
 END 'A' PLUG: NEMA 5-15P
 END 'B': SEE TERMINATION TABLE
 APPROVALS PLUG: UL, CSA
 APPROVALS CABLE: UL, CSA



DASH NO.	PART NO	REV.	DESCRIPTION	NOTES
TABULATION BLOCK				
REV.				
SHEET				
INIT.BY: EM		DATE: 07/17/02	GlobTek, Inc. www.globtek.com 186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111	
DRAWN: NF		DATE: 07/17/02		
APRVD: BS		DATE: 07/17/02	DWG TITLE: 120 V LINE CORD ASSY, SHIELDED PART NO: 3011863F2DDRR	
		SCALE: NONE	REV. D1 SHEET 1/2	

Foot Note:
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

Limitation of Use:
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice

PROPRIETARY INFORMATION:

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

CONDUCTOR TERMINATION TABLE:

Color	ROJ \pm 5 mm	RIJ \pm 1 mm	Terminal
Blue	127	-	Fully insulated, Faston for .032 x0.250"tab, Amp 3-520116-2 or equiv.
Brown	127	-	Fully insulated, Faston for .032 x0.250"tab, Amp 3-520116-2 or equiv.
Green/Yellow	230	-	Ring #8 stud , insulated, Panduit PV14-8R-C or equiv.
Black/Shrink	50	-	Ring #8 stud , Amp 640204-1 or equiv.

NOTES:

1. CORD AND PLUG MUST BE MARKED WITH APPROVAL SYMBOLS AND/ OR FILE NUMBERS.

PACKING:

BULK PACKED, BUNDLES OF 25.
MAXIMUM SHIPPING CARTON WEIGHT IS 30 KG.



186 Veterans Dr. Northvale, NJ 07647
Tel. 201-784-1000 Fax 201.784.0111

DWG TITLE: 120 V LINE CORD ASSY, SHIELDED

PART NO: **3011863F2DDRR**

REV.
D1

SHEET 2/2