
PROPRIETARY INFORMATION:		REVISION						
PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OF	REV	DESCRIPTION	DATE	APPROVED				
USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.	Α	INITIAL RELEASE, RFS.2679, DMR	12/12/03	DMR				
richibiteb excel i no of bon ieb it withing bi deobitek,inc.	В	CHANGE PACKING TO LOOSE HANK, UPDATE DWG, RFS.2775, DMR	01/02/04	DMR				
	С	REVISE T-MARK TO PSE, RFS. 8628, DMR	06/08/06	BS				
	D	ADD ROHS PREFIX TO P/N, RFS. 22717, BS	04/02/12	BS				

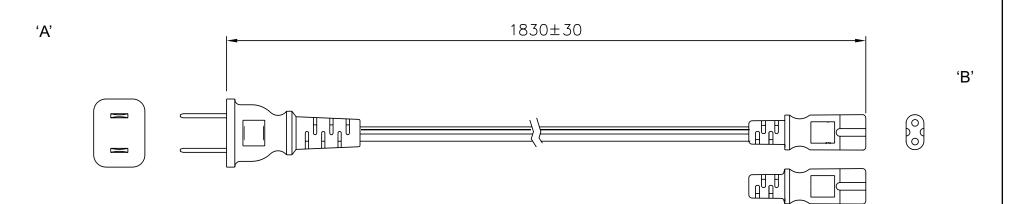


GENERAL SPECIFICATIONS:

RATING: CABLE TYPE / SIZE: TEMPERATURE RATING: 7A / 125V AC VFF, 2 x 0.75 mm² 60° C

CABLE JACKET COLOR: OVERALL LENGTH (L): CABLE OUTER DIAMETER: END 'A' TERMINATION: END 'B' TERMINATION: APPROVALS PLUG: APPROVALS CABLE: APPROVALS CONNECTOR: BLACK 1830 ± 30 mm 3.4 x 6.9 ± 0.2 mm JIS 8303 IEC 320 /C7 PSE PSE PSE

PACKING:

LOOSE HANK:



NOTES:

1. CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).



Substances										
		DASH NO.	PART NO	REV.		DESCRIPTION	NOTES			
Rohs			TABULATION BLOCK							
					TOLEF DECIMAL: .xx +/- 0.1 .xxx +/00	+/- 1*	GlobTek, Inc. www.globtek.com 186 Veterans Dr. No Tel. 201-784-1000			
Contents of this document are subject to change without prior notice	safety and performance of these power sup- plies if unauthorized access and repair occurs. End user should consult for the proper instal-	Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.	INIT.BY:DMR	DATE: 12/12/03	MILLIMETERS ANGULAR .xx +/- 0.3 +/- 1* .xxx +/013		DWG TITLE: JAPAN DETACHABLE CORDSET			
			DRAWN: NF	DATE: 12/12/03	FSCN No. G, CC,YL			REV. D		
			APRVD: DMR	DATE: 12/12/03	SCALE: NONE		PART NO: 451J3401M8703(R)	SHEET 1/1		