



PROPRIETARY INFORMATION:		REVISION	
PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING IN WHOLE OR IN PART IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.		REV	DESCRIPTION
A	INITIAL RELEASE, RFS 2612, SO	DATE	APPROVED
B	CLARIFY LENGTH: FROM 20FT TO 20FT.3INCH, RFS 2664, DMR	11/25/03	BS
C	REDDRAW PICTURE, PACKING, RFS 4350, SO	12/08/03	DMR
		08/25/04	BS


'B'



6180 ± 20 mm

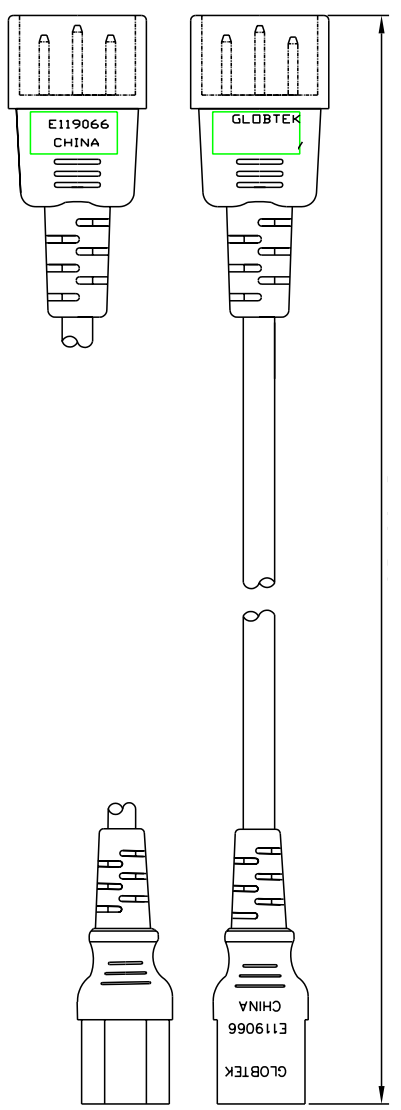


'A'



GENERAL SPECIFICATIONS:

- RATING: 10A / 125V AC
- CABLE TYPE / SIZE: SVT, AWG 18X3
- TEMPERATURE RATING: 60° C
- CONDUCTOR COLORS: BLACK / WHITE / GREEN
- CABLE JACKET COLOR: BLACK
- OVERALL LENGTH (L): 6180± 20 mm (20 Ft, 3 inch)
- CABLE OUTER DIAMETER: 6.3 ± 0.1 mm
- END 'A' PLUG: IEC 320 / C13
- END 'B': IEC 320 / C14
- APPROVALS PLUG: UL, CSA OR cUL
- APPROVALS CABLE: UL, CSA OR cUL
- APPROVALS CONNECTOR: UL, CSA OR cUL

PACKING:
HANK

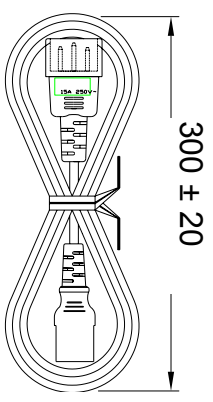

- NOTES:**
1. CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).



Foot Note:
GlobeTek Inc. will not be liable for the safety and performance of these power supplies if unauthorized access and repair occurs. End user should consult for the proper installation instruction the applicable UL, CSA and EN standards.

Limitation of Use:
GlobeTek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of GlobeTek Inc.

Contents of this document are subject to change without prior notice		DASH NO.		PART NO		REV.		DESCRIPTION		NOTES	
		REV. C						TABULATION BLOCK			
		SHEET 1						TOLERANCES: DECIMALS ANGULAR .xx +/- .01 .xxx +/- .005 MILLIMETERS ANGULAR .xx +/- .03 xxx +/- .013		SIZE A	
		INT BY: SO		DATE: 11/25/03		FSCN No.: G, CC		SCALE: NONE		PART NO: 70514420F701	
		DRAWN: NF		DATE: 11/25/03						REV. C	
		APRVD: DMR		DATE: 11/25/03						SHEET 1/1	

GlobeTek, Inc.
www.globtekt.com
186 Veterans Dr. Northvale, NJ 07647
Tel 201-784-1000 Fax 201-784-0111