## PROPRIETARY INFORMATION:

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK,INC.

	REVISION		
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE, RFS. 26975	12/06/17	MK
В	REMOVE UL FROM APPROVALS, RFS. 27059, JS	04/13/18	MK




## NSW22009








В



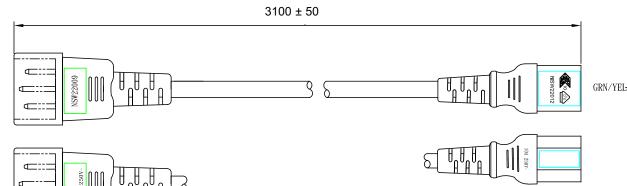

## **GENERAL SPECIFICATIONS:**

RATING: 10A / 250V AC

CABLE TYPE / SIZE: H05VVF 3x1.0 mm<sup>2</sup>

TEMPERATURE RATING: 70°C MIN.

CONDUCTOR COLORS: BLUE / BROWN / GREEN-YELLOW

CABLE JACKET COLOR: BLACK

OVERALL LENGTH (L): 3100 ± 50 mm

CABLE OUTER DIAMETER: 7.0 mm NOMINAL
END 'A' PLUG: IEC 320 / C14
END 'B': IEC 320 / C13

APPROVALS PLUG: VDE, N, S, D, FI, KEMA, SAA, UTE, CEBEC, OVE APPROVALS CABLE: VDE, N, S, D, FI, KEMA, SAA, SEV, CEBEC, OVE

APPROVALS CONNECTOR: VDE, N, S, D, FI, BSI, KEMA, SEV, SAA, IMQ, UTE, CEBEC, OVE CE

## **PACKING:**

**BULK PACK BUNDLESS OF 10** 



1. CORD MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).



2. PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).





200±20		DASH NO.	PART NO	REV.	EV. DESCRIPTION			NOTES	
		TABULATION BLOCK							
				TOLERANCES: DECIMALS ANGULAR .xx +/- 0.1 +/- 1* .xxx +/005		GlobTek, Inc.	186 Veterans Dr. Nort Tel. 201-784-1000 F		
	safety and performance of these power product if unauthorized access and repair to occurs. End user should consult the applications without prications with p	Globtek product are not authorized for use as mission critical components in life support,	IINII.DI. IVIIX	DATE: 12/06/17	MILLIMETER .xx +/- 0.3 .xxx +/013	+/- 1*	DWG TITLE: JUMPER CORDSET		
			DRAWN: NF	DATE: 12/06/17	FSCN No. G, CC	SIZE A			REV. B
		**	APRVD: DMR	DATE: 12/06/17	SCALE:	NONE	PART NO: <b>70542710F0701(R)</b>		SHEET 1/1