


PROPRIETARY INFORMATION:	REVISION						
PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK,INC.	REV	DESCRIPTION	DATE	APPROVED			
	Α	INITIAL RELEASE, RFS.3402, BS	03/31/04	BS			
	В	UPDATE DRAWING, RFS. 26713, NF	03/29/17	BS			







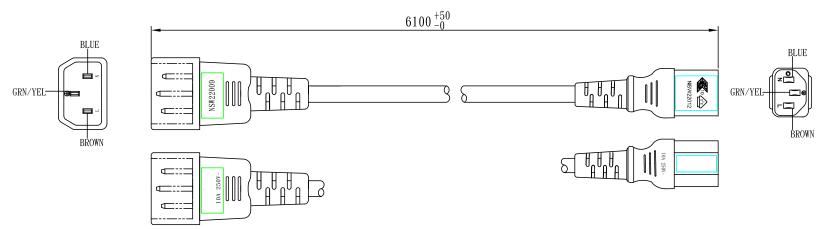

GENERAL SPECIFICATIONS:

RATING: 10A / 250V AC CABLE TYPE / SIZE: H05VVF 3X1.0 mm² **TEMPERATURE RATING:** 60° C BLUE / BROWN / GREEN-YELLOW CONDUCTOR COLORS: CABLE JACKET COLOR: BLACK OVERALL LENGTH (L): 6100 -0 /+ 50 mm CABLE OUTER DIAMETER: 8.3 + 0.2 mm END 'A' PLUG; IEC 320 / C14 IEC 320 / C13 END 'B' VDE, N, S, D, FI, KEMA, SAA, UTE. CEBEC. OVE APPROVALS PLUG: APPROVALS CABLE: VDE, N, S, D, FI, K APPROVALS CONNECTOR: VDE, N, S, D, FI, E

PACKING:

	VDE, N, S, D, FI, KEMA, SAA, SEV, CEBEC, OVE R: VDE, N, S, D, FI, BSI, KEMA, SEV, SAA, IMQ, UTE, CEBEC, OVE CE				
PACKING: BULK PACKED, BUNDLES OF 25.					
MAXIMUM SHIPPING CARTON WEIGHT IS 30 KG.	DASH NO.	PART NO	REV.		DESCRIPTION

TABULATION BLOCK TOLERANCES: DECIMALS ANGULAR GlobTek, Inc. 186 Veterans Dr. Northvale, NJ 07647 .xx +/- 0.1 +/- 1° Tel. 201-784-1000 Fax 201.784.0111 www.globtek.com .xxx +/- .005 MILLIMETERS ANGULAR DATE: DWG TITLE: INTERNATIONAL JUMPER CORD Foot Note: Limitation of Use: INIT.BY: FS +/- 1° .xx +/- 0.3 Globtek Inc. will not be liable for the safety and Globtek product are not authorized for use as 03/31/04 .xxx +/- .013 performance of these power products if unaumission critical components in life support, DATE: FSCN No.: SIZE REV. Contents of this document thorized access and repair occurs. End user hazardous environment, nuclear or DRAWN: NF are subject to change with-G, CC В should consult the applicable UL,CSA or EN aircraft applications without prior written А 03/31/04 out prior notice approval from the CEO of Globtek Inc. Standards for proper installation instruction. DATE: 70542720F0701 APRVD: DMR SCALE: NONE PART NO: SHEET 1/1 03/31/04

NOTES:

1. CORD MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).



2. PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL R(S).

RELEASED

By N.Frost at 4:36 pm, Mar 29, 2017

NOTES