

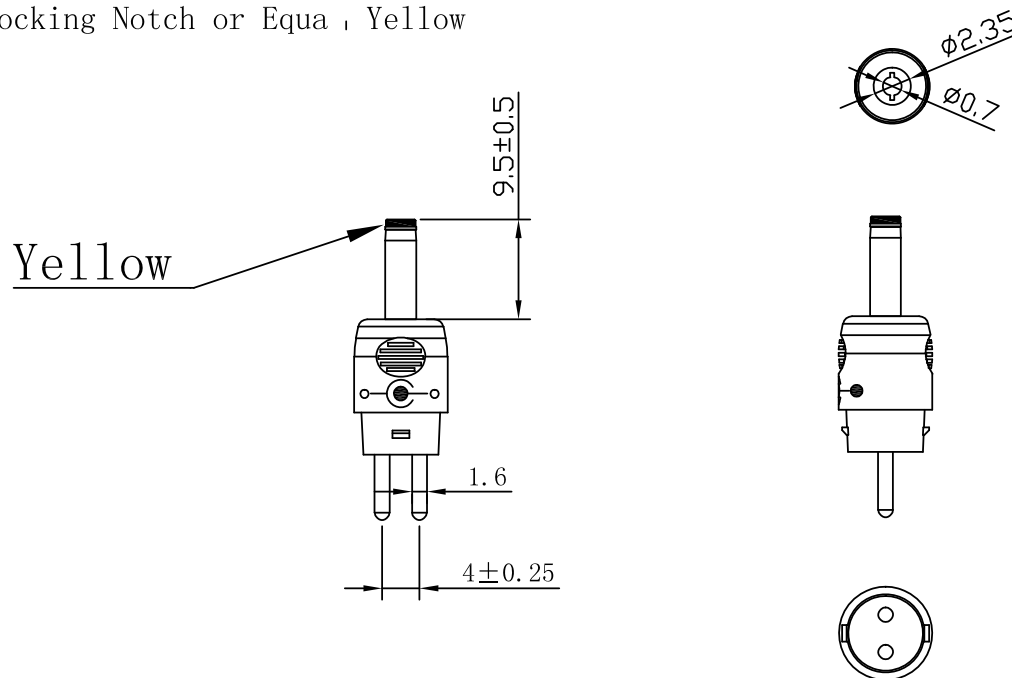
PROPRIETARY INFORMATION:


PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

REVISION

REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE, RFS. 26935, RC	10/18/17	MK

1. All material fulfilled ROHS.
2. Overmold material is PVC-60P.
3. 2.35*0.7*9.5 mm with internal Spring Clip and Locking Notch or Equa, Yellow


RELEASED
By N.Frost at 2:30 pm, Oct 18, 2017

DASH NO.	PART NO	REV.	DESCRIPTION		NOTES
TABULATION BLOCK					
		TOLERANCES: DECIMALS ANGULAR .xx +/- 0.1 +/- 1° .xxx +/- .005		<div> GlobTek, Inc. www.globtek.com</div> <div>186 Veterans Dr. Northvale, NJ 07647 Tel. 201-784-1000 Fax 201.784.0111</div>	
		MILLIMETERS ANGULAR .xx +/- 0.3 +/- 1° .xxx +/- .013			
INIT.BY: RC	DATE: 10/18/17			DWG TITLE: Barrel Connector 2.35*0.7*9.5 mm, with Locking Notch or Equal, Yellow	
DRAWN: NF	DATE: 10/18/17	FSCN No.: G, CC	SIZE A	MODEL: N / A	REV. A
APRVD: MK	DATE: 10/18/17	SCALE: NONE		PART NO: T-EJ1-95-S(R)	SHEET 1/1

Foot Note:
Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

Limitation of Use:
Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.

Contents of this document are subject to change without prior notice