


PROPRIETARY INFORMATION:		REVISION	
PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING IN WHOLE OR IN PART IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.			
REV	DESCRIPTION	DATE	APPROVED
C	INITIAL RELEASE	12/14/00	PS
D	REDRAW TO NEW FORMAT. ADD cUL, RFS 4855; DMR	11/02/04	BS

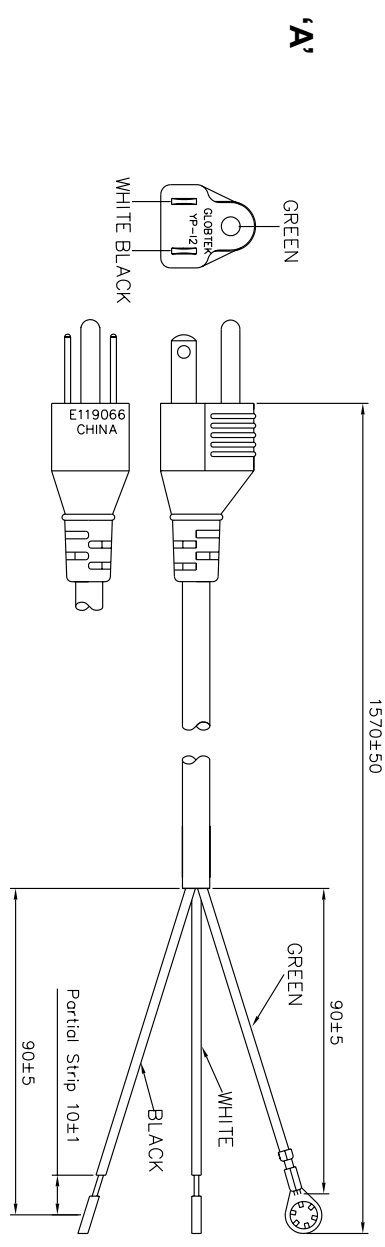

1.GENERAL SPECIFICATIONS:

RATING: 10A / 125V AC
 CABLE TYPE / SIZE: SVT, # 18 AWG, 3 CONDUCTOR
 TEMPERATURE RATING: 60° C MIN.
 CONDUCTOR COLORS: BLACK / WHITE / GREEN
 CABLE JACKET COLOR: BLACK
 OVERALL LENGTH (L): 1570 ± 50 mm (5 FT)
 CABLE OUTER DIAMETER: 6.3 ± 0.1 mm
 END 'A' PLUG: NEMA 5-15P
 END 'B': SEE TERMINATION TABLE
 APPROVALS PLUG: UL, CSA OR cUL
 APPROVALS CABLE: UL, CSA OR cUL

2.PACKING:

BULK PACKED, BUNDLES OF 25.
 MAXIMUM SHIPPING CARTON WEIGHT IS 30 KG.

3.NOTES:

1. CORD, PLUG AND CONNECTOR MUST BE MARKED WITH APPROVAL SYMBOLS OR FILE NUMBER(S).
2. CABLE STRANDING IS 41/34.



CONDUCTOR TERMINATION TABLE:

Wire	Color	RO±.5 mm	PARTIAL STRIP	TERMINATION
NEUTRAL	WHT	90	10	PARTIAL STRIP
LINE	BLK	90	10	PARTIAL STRIP
GROUND	GRN	90	-	# 6 RING (SERRATED) TYPE T-6895/ J6176BS-2 OR EQUIVALENT

DASH NO.		PART NO.		REV.		DESCRIPTION		NOTES	
TABULATION BLOCK									
REV. D		DATE: 11/02/04		TOLERANCES:		GlobTek, Inc. www.globtek.com 186 Veterans Dr. Northvale, NJ 07647 Tel 201-784-1000 Fax 201-784-0111			
SHEET 1		DATE: 11/02/04		DECIMALS					
INTTBY: DMR		DATE: 11/02/04		ANGULAR					
DRAWN: NF		DATE: 11/02/04		FSCN No.:		SIZE		REV.	
APRVD: DMR		DATE: 11/02/04		SCALE: NONE		A		D	
								SHEET 1/1	

Contents of this document are subject to change without prior notice

Foot Note:
 Globtek Inc. will not be liable for the safety and performance of these power product if unauthorized access and repair occurs. End user should consult the applicable UL, CSA or EN Standards for proper installation instruction.

Limitation of Use:
 Globtek product are not authorized for use as mission critical components in life support, hazardous environment, nuclear or aircraft applications without prior written approval from the CEO of Globtek Inc.