

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-83083-05VV-USB (F-Blade)

May 3, 2024

GT-83083-05VV-USB (F-Blade)

Information

Model Number

GT-83083-05VV-USB (F-Blade)

Description

GT-83083-05VV-USB (F-Blade), ICT/ITE Power Supply, Wall Plug-in, Regulated Switchmode AC-DC Power Supply AC Adaptor, , Input Rating: 100-240V~, 50-60Hz, Blade Options for F- Series Wall Plug-in Power Supplies, Output Rating: 5 Watts, Power rating with convection cooling (W) , 5VV in 0.1V increments, Approvals: SIQ; CB 60950; UKCA; Morocco; CB 62368; LPS 62368; CE; China RoHS; cULus; Double Insulation; Level VI; LPS 60950; PSE; VCCI; WEEE;

Model Picture



Agency Documents

<http://www.globtek.info/certs/GT-83083-USB-W2Z/>

CE EC-Declaration

https://www.globtek.com/pdf/ec_declaration/a0Oa000000FiWHOEA3

RoHS/RoHS2 Declaration

https://www.globtek.com/pdf/rohs_cert/a0Oa000000FiWHOEA3

REACH Declaration

https://www.globtek.com/pdf/iso_certificates/REACH.pdf

Conflict Minerals Declaration

<https://www.globtek.com/pdf/conflict-minerals.pdf>

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-83083-05VV-USB (F-Blade)

May 3, 2024

MODEL PARAMETERS




Type	Wall Plug-in
Technology	Regulated Switchmode AC-DC Power Supply AC Adaptor
Category	ICT/ITE Power Supply
Input Voltage	100-240V~, 50-60Hz
I/P Amps (A)	0.2A
Wattage (W)	5.0
Vout Range (V)	5V
Efficiency Level	USA DOE Level VI / Eco-design Directive 2009/125/EC, (EU) 2019/1782
Ingress Protection	IPX0
Size (mm)	47.3(L) *34.8(W) *26.7(H)

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-83083-05VV-USB (F-Blade)

May 3, 2024

ENCLOSURE

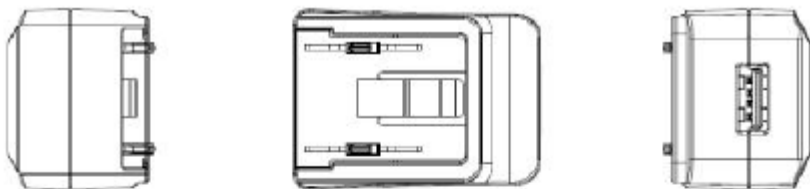

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-83083-05VV-USB (F-Blade)

May 3, 2024

RATING TABLE

Model Number	Voltage	Amps(A)	Watts(W)	RFQ
GT-83083-0505-USB	5 V	1	5.00	RFQ

Model:GT-83083-05VV-USB (F-Blade)

May 3, 2024

SPECIFICATIONS

A) ELECTRICAL SPECIFICATIONS:

01. Input Voltage: Specified 90-264 Vac, Nameplate rated: 100-240Vac
02. Input Frequency: Specified 47-63 Hz, Nameplate rated 50-60Hz
03. Line Regulation: $\pm 5\%$
04. Load regulation: $\pm 5\%$
05. Ripple and Noise (Vp-p): 300 mVp-p maximum, At 20 MHz, and output parallel with 0.1uF & 10uF capacitors to ground, Temperature at 25 °C, and nominal AC input voltage
06. Average Efficiency: 73.77% minimum , At nominal input voltage average Efficiency meet CEC VI
07. Turn-ON Delay: 3 Seconds maximum

B) PROTECTION

01. Over-Voltage: 10V maximum
02. Over current protection: 1.5A maximum with auto-recovery function
03. Short Circuit: The adapter shall not be damaged by short the DC output to Ground.

C) SAFETY

01. Dielectric Withstand Voltage: Primary To Secondary: 3000VAC 10mA 1minute or 4242VDC 10mA 1minute
02. Leakage Current: 20uA maximum, at nominal AC input voltage and frequency

D) EMC

01. Emissions, per EN 55032, EN 61000-6-3, EN 61000-6-4
 - Conducted Emissions: Class B, FCC Part 15, Class B
 - Radiated Emissions: Class B, FCC Part 15, Class B
02. Line Frequency Harmonics EN61000-3-2, Class A
03. Voltage Fluctuations/Flicker EN61000-3-3
04. Immunity, per EN 55024, EN 61000-6-1, EN 61000-6-2
 - Static Discharge Immunity EN61000-4-2, 4kV Contact Discharge, 8kV air discharge
 - Radiated RF Immunity EN61000-4-3, 3V/m 80-1000MHz, 80% 1KHz AM.
 - EFT/Burst Immunity EN61000-4-4, 1kV/100kHz.
 - Line Surge Immunity EN61000-4-5, 1kV differential, 2kV common-mode
 - Conducted RF Immunity EN61000-4-6, 3Vrms, 80% 1KHz AM
 - Power Frequency Magnetic Field Immunity EN61000-4-8, 1A/m
 - Voltage Dip Immunity EN61000-4-11, Criteria

E) OTHER:

01. MTBF: 200,000 Hours @ 25°C ambient temperature
02. Operating Temperature: 0°C to 40°C ambient temperature
03. Humidity: 0% to 90% relative humidity
04. Storage Temperature: -20°C to 60°C
05. Cooling: natural convection cooling
06. ROHS 2: Complies with EU 2011/65/EU and China SJ/T 11363-2006

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<https://www.globtek.com/ds/jXhqcBvV8uy/J9Cagu9vrqb.html>

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-83083-05VV-USB (F-Blade)

May 3, 2024

F) ENCLOSURE

01. Housing: High impact plastic, 94V0 polycarbonate, non-vented


02. Markings: Label and/or Pad Printed and/or Molded in the case

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-83083-05VV-USB (F-Blade)

May 3, 2024

DERATING CURVE

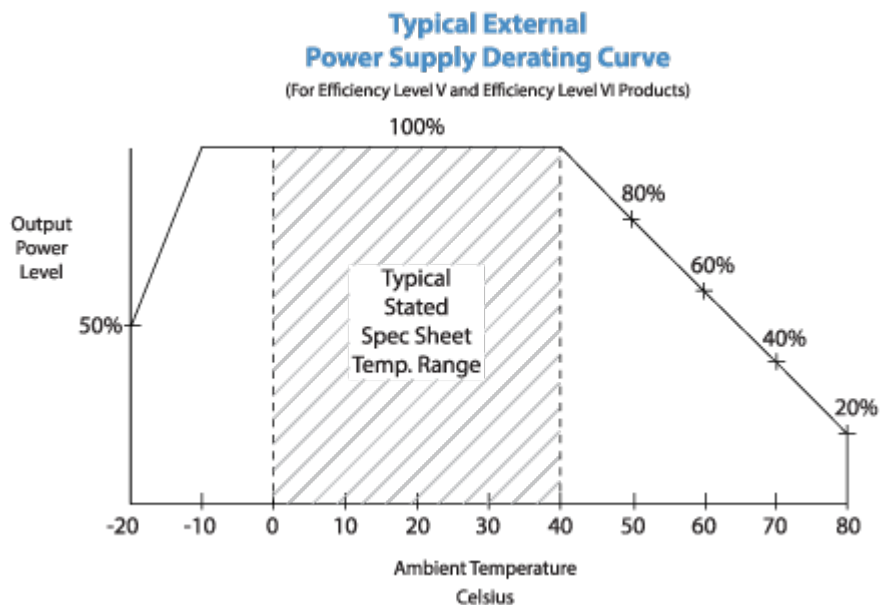

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-83083-05VV-USB (F-Blade)

May 3, 2024

INPUT CONFIGURATION

Description

Blade Options for F- Series Wall Plug-in Power Supplies



INPUT CONNECTOR: F-Socket (below are available blades configurations which are "not included" (unless stated above); can be purchased separately, package with power supply or as a separate "F-KIT" if specified

01. United States / Canada / Japan NEMA 1-15P configuration: NA 2 blades, Class II; US/CA/JP P/N: F-NA(R)
02. European CEE 7/16 configuration: Europlug 2 pins, Class II; EU P/N: F-EU(R)
03. UK BS 1363 configuration: UK 3 blade with dummy Ground, Class II; GB P/N: F-UK(R)
04. Australian AS 3112 configuration: SAA 2 blade, Class II; AU P/N: F-SAA(R)
05. Brazilian NBR6147 configuration: 2 pins, Class II;SIMILAR TO IEC TYPE C BR P/N: F-BR(R)

F-KIT: 1,2,3,4,5 above

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-83083-05VV-USB (F-Blade)

May 3, 2024

OUTPUT CONFIGURATION


Common output connector options:



L Type (Coaxial
5.5x2.5mm plug)



C Type (Coaxial
5.5x2.1mm plug)



K Type (Coaxial
3.5x1.3mm plug)



LL Type (5.5x2.5mm
Locking 760k type)



CL Type (5.5x2.1mm
Locking S761k type)



ML2 Type (Molex
housing 43025-0200)



YL3 Type
(KPPX-3P)



YL4 Type (KPPX-4P)



EJ1/2/3/4/5 (EIAJ
RC-5320A type
connectors)



MSB Type (Micro
USB)



USBC Type (USB
Type C)



Inquire for custom
design

For a comprehensive list of options, [click here](#)









Contact GlobTek for your specific requirements or custom solutions.

Delivering leading edge, innovative power solutions for more than 30 years....

Model:GT-83083-05VV-USB (F-Blade)

May 3, 2024

Approvals

Logo	Description
	Attention Mark / Refer to operating manual for operating and service instructions
No Logo Applicable	CB report 60950-1 2nd Ed
No Logo Applicable	CB for IEC 62368-1:2014 (Second Edition) + A11:2017
	CE Mark: tested to comply with EN55022:2006/A1:2007 Class B, EN610003-2, EN610003-3 including EN61000-4-2, EN61000-4-3, EN61000-4-4, EN61000-4-5, EN61000-4-6N EN61000-4-11; EMI: Complies with EN55011 CLASS B and FCC Part 15B - On label or Molded in case
	CHINA SJ/T 11364-2014, China RoHS Chart: http://www.globtek.com/pdf/F-GT-DJD-8.4.1-006%20China%20RoHS%20Declaration%205-20-22.pdf
	UL60950-1, cULus to UL 60950-1, 2nd Edition, 2007-03-27 and CSA C22.2 No. 60950-1-07, 2nd Edition, 2007-03
	
	Indoor Use Only - Mark is on the label or Molded in the case
 GlobTek, Inc.	JAPAN TUV R-PSE, Cert. No. JD 50471624, to J62368-1(H30) , J55032(H29),J3000(H25,[15V or less]). Please reference the following website for guidelines on PSE regulations: https://www.globtek.com/r2/Szj4Vb
	Efficiency: complies to section 301 of Energy Independence and Security Act (EISA) complies with Energy Star tier 2 (North America), ECP tier 2 (China), MEPS tier 2 (Australia), Code of Conduct (Europe)
LPS	Limited Power Source 60950
LPS	Limited Power Source 62368

PROPRIETARY INFORMATION

PROPRIETARY OF GLOBTEK, INC. ANY REPRODUCTION, DISCLOSURE OR USE OF THIS DRAWING, IN WHOLE OR IN PART, IS HEREBY PROHIBITED EXCEPT AS SPECIFIED IN WRITING BY GLOBTEK, INC.

<https://www.globtek.com/ds/jXhqcBvV8uy/J9Cagu9vrqb.html>

Delivering leading edge, innovative power solutions for more than **30** years....

Model:GT-83083-05VV-USB (F-Blade)

May 3, 2024

	Morocco SDoC declaration http://www.globtek.info/certs/Morocco%20SDoC%20Declaration/
 IEC/EN60950-1	SIQ Mark License EN60950-1
	UKCA Certification
	Japan: Voluntary Control Council for Interference (VCCI)
	WEEE: Complies with EU 2012/19/EU (http://ec.europa.eu/environment/waste/weee/index_en.htm) Mark is on the label or Molded in the case